







NZMH2-4-VE100-SVE

Overview

Specifications

Resources







DELIVERY PROGRAM

Delivery program

Product range Orcuit-breaker

Technical data

Design verification as

per IEC/EN 61439

Protective function

Systems, cable, selectivity and generator protection

Technical data ETIM 7.0

Standard/Approval

IEC

Characteristics

Installation type Plug-in units

Dimensions

Release system **Bectronic release**

Construction size

NZM2

Description

Rms. value measurement and "thermal memory"

Adjustable time delay setting to overcome current peaks tr at 6 x lr also infinity (without overload releases)
Adjustable delay time tsd i²t constant function: fixed OFF
Set value in neutral conductor is synchronous with set value lr of main pole.

Number of poles 4 pole

Standard equipment Screw connection

Switching capacity

 $400/415 \text{ V } 50 \text{ Hz } [l_{cu}]$ 150 kA

Rated current = rated uninterrupted current $[I_n = I_u]$

Rated current = rated uninterrupted current $[I_n = I_u]$ 100 A

Neutral conductor [% of phase conductor] 100 %

Setting range

Overload trip

50 - 100 A

Overload trip Main pole [I_r] 50 - 100 A

Short-circuit releases $[l_{rm}]$ Non-delayed $[l_{i} = l_{n} \times ...]$ 1200 A fixed

Short-circuit releases $[l_{km}]$ Delayed $[l_{kd} = l_k \times ...]$ 2 - 10

TECHNICAL DATA

General

Standards IEC/EN 60947

Protection against direct contact Finger and back of hand proof to VDE0106 Part 100

Olimatic proofing Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30

Ambient temperature, storage - 40 - +70 °C

Ambient temperature Operation -25 - +70 °C

Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC 60068-2-27 20 (half-sinusoidal shock 20 ms) g

Safe isolation to EN 61140 Between auxiliary contacts and main contacts 500 V AC

Safe isolation to BN 61140 between the auxiliary contacts 300 V AC

Mounting position

Vertical and 90° in all directions



With XFI earth-fault release:

- NZM1, N1, NZM2, N2: vertical and 90° in all directions

with plug-in unit

- NZM1, N1, NZM2, N2: vertical, 90° right/left

with withdrawable unit:

- NZM3, N3: vertical, 90° right/left

- NZM4, N4: vertical
with remote operator:
- NZM2, N(S)2, NZM3, N(S)3,
NZM4, N(S)4: vertical and 90°

in all directions

Direction of incoming supply as required

Degree of protection
Device
In the operating controls area: IP20 (basic degree of protection)

Degree of protection
Enclosures
With insulating surround: IP40
With door coupling rotary handle: IP66

Degree of protection
Terminations
Tunnel terminal: IP10
Phase isolator and strip terminal: IP00

Other technical data (sheet catalogue) Temperature dependency, Derating

Circuit-breakers

Rated current = rated uninterrupted current [$I_n = I_u$] 100 A

Rated surge voltage invariability [U_{mp}] Main contacts $8000\ V$

Rated surge voltage invariability [U_{mp}] Auxiliary contacts 6000 V

Rated operational voltage $[U_e]$ 690 V AC

Overvoltage category/pollution degree III/3

Rated insulation voltage [U] 1000 V

Use in unearthed supply systems $\hfill\Box$ 690 V

Switching capacity

Rated short-circuit making capacity [l_{cm}] 240 V [l_{cm}] 330 kA

Rated short-circuit making capacity [l_{cm}] 400/415 V [l_{cm}] 330 kA

Rated short-circuit making capacity [l_{cm}] 440 V 50/60 Hz [l_{cm}] 286 kA

Rated short-circuit making capacity [l_{cm}] 525 V 50/60 Hz [l_{cm}] 105 kA

Rated short-circuit making capacity [l_{cm}] 690 V 50/60 H [lc] 40 kA

Rated short-circuit breaking capacity l_{cn} [l_{cn}] lcu to IEC/EN 60947 test cycle O-t-CO [lcu] 240 V 50/60 Hz [l_{cu}] 150 kA

Rated short-circuit breaking capacity l_{cn} [l_{cn}] lcu to IEC/EN 60947 test cycle O-t-CO [lcu] 400/415 V 50/60 Hz [l_{cu}] 150 kA

Rated short-circuit breaking capacity l_{cn} [l_{cn}] lcu to IEC/EN 60947 test cycle O-t-CO [lcu] 440 V 50/60 Hz [l_{cu}] 130 kA

Rated short-circuit breaking capacity l_{cn} [l_{cn}] lcu to IEC/EN 60947 test cycle O-t-CO [lcu] 525 V 50/60 Hz [l_{cu}] 50 kA

Rated short-circuit breaking capacity l_{cn} [l_{cn}] lcu to IEC/EN 60947 test cycle O-t-CO [lcu] 690 V 50/60 Hz [l_{cu}] 20 kA

Rated short-circuit breaking capacity l_{cn} [l_{cn}] lcs to IEC/EN 60947 test cycle O-t-CO-t-CO [lcs] 240 V 50/60 Hz [l_{cs}] 150 kA

Rated short-circuit breaking capacity l_{cn} [l_{cn}] lcs to IEC/EN 60947 test cycle O-t-CO-t-CO [lcs] 400/415 V 50/60 Hz [l_{cs}] 150 kA

Rated short-circuit breaking capacity l_{cn} [l_{cn}] lcs to IEC/EN 60947 test cycle O-t-CO-t-CO [lcs] 440 V 50/60 Hz [l_{cs}] 130 kA

Rated short-circuit breaking capacity l_{cn} [l_{cn}] lcs to IEC/EN 60947 test cycle O-t-CO-t-CO [lcs] 525 V 50/60 Hz [l_{cs}] 37.5 kA

Rated short-circuit breaking capacity l_{cn} [l_{cn}] lcs to IEC/EN 60947 test cycle O-t-CO-t-CO [lcs] 690 V 50/60 Hz [l_{cs}] 5 kA

Rated short-circuit breaking capacity l_{cn} [l_{cn}] Maximum back-up fuse, if the expected short-circuit currents at the installation location exceed the switching capacity of the circuit-breaker.

Rated short-time withstand current $t = 0.3 \, s \, [l_{\text{\tiny SW}}]$ 1.9 kA

Rated short-time withstand current $t = 1 \text{ s } [I_{cw}]$ 1.9 kA

Utilization category to IEC/EN 60947-2 A

Lifespan, mechanical(of which max. 50 % trip by shunt/undervoltage release) [Operations] 20000

Lifespan, electrical AC-1 400 V 50/60 Hz [Operations] 10000

Lifespan, electrical AC-1 415 V 50/60 Hz [Operations] 10000

Lifespan, electrical AC-1 690 V 50/60 Hz [Operations] 7500

Lifespan, electrical AC--3 400 V 50/60 Hz [Operations] 6500

Lifespan, electrical AC--3 415 V 50/60 Hz [Operations] 6500

Lifespan, electrical AC--3 690 V 50/60 Hz [Operations] 5000

Lifespan, electrical Max. operating frequency 120 Ops/h

Total break time at short-circuit < 10 ms

Terminal capacity

Standard equipment Screw connection

Accessories required NZIV2-4-XSVS

Optional accessories Box terminal Tunnel terminal connection on rear

Round copper conductor Box terminal Solid 1 x (10 - 16) 2 x (6 - 16) mm²

Round copper conductor Box terminal Stranded 1 x (25 - 185) 2 x (25 - 70) mm²

Round copper conductor Tunnel terminal Solid 1 x 16 mm²

Round copper conductor Tunnel terminal Stranded 1-hole 1 x (25 - 185) mm²

Round copper conductor
Bolt terminal and rear-side connection
Direct on the switch
Solid
1 x (10 - 16)
2 x (6 - 16) mm²

Round copper conductor
Bolt terminal and rear-side connection
Direct on the switch
Stranded
1 x (25 - 185)
2 x (25 - 70) mm²

Al circular conductor Tunnel terminal Solid 1 x 16 mm²

Al circular conductor Tunnel terminal Stranded Stranded 1 x (25 - 185) mm²

Ou strip (number of segments x width x segment

thickness)
Box terminal [min.]
2 x 9 x 0.8 mm

Qu strip (number of segments x width x segment thickness)
Box terminal [max.]
10 x 16 x 0.8
(2x) 8 x 15.5 x 0,8 mm

Ou strip (number of segments x width x segment thickness)

Bolt terminal and rear-side connection

Flat copper strip, with holes [min.]

2 x 16 x 0.8 mm

Ou strip (number of segments x width x segment thickness)

Bolt terminal and rear-side connection

Flat copper strip, with holes [max.]

10 x 24 x 0.8 mm

Copper busbar (width x thickness) [mm] Bolt terminal and rear-side connection Screw connection M8

Copper busbar (width x thickness) [mm] Bolt terminal and rear-side connection Direct on the switch [min.] 16 x 5 mm

Copper busbar (width x thickness) [mm] Bolt terminal and rear-side connection Direct on the switch [max.] 24 x 8 mm

Control cables 1 x (0.75 - 2.5) 2 x (0.75 - 1.5) mm²

DESIGN VERIFICATION AS PER IEC/EN 61439

Technical data for design verification

Rated operational current for specified heat dissipation $[I_n]$

Equipment heat dissipation, current-dependent $[P_{id}] \\ 8.25\,W$

Operating ambient temperature min. -25 $^{\circ}$ C

Operating ambient temperature max. +70 °C

IEC/EN 61439 design verification

10.2 Strength of materials and parts10.2.2 Corrosion resistanceMeets the product standard's requirements.

10.2 Strength of materials and parts 10.2.3.1 Verification of thermal stability of enclosures Meets the product standard's requirements.

10.2 Strength of materials and parts10.2.3.2 Verification of resistance of insulating materials to normal heatMeets the product standard's requirements.

10.2 Strength of materials and parts
10.2.3.3 Verification of resistance of insulating
materials to abnormal heat and fire due to internal
electric effects
Meets the product standard's requirements.

10.2 Strength of materials and parts 10.2.4 Resistance to ultra-violet (UV) radiation Meets the product standard's requirements.

10.2 Strength of materials and parts10.2.5 LiftingDoes not apply, since the entire switchgear needs to be evaluated.

10.2 Strength of materials and parts10.2.6 Mechanical impactDoes not apply, since the entire switchgear needs to be evaluated.

10.2 Strength of materials and parts10.2.7 InscriptionsWeets the product standard's requirements.

10.3 Degree of protection of ASSEVBLIES Does not apply, since the entire switchgear needs to be evaluated.

10.4 Clearances and creepage distances Weets the product standard's requirements.

10.5 Protection against electric shock
Does not apply, since the entire switchgear needs
to be evaluated.

10.6 Incorporation of switching devices and components

Does not apply, since the entire switchgear needs to be evaluated.

10.7 Internal electrical circuits and connections Is the panel builder's responsibility.

10.8 Connections for external conductors Is the panel builder's responsibility.

10.9 Insulation properties 10.9.2 Power-frequency electric strength Is the panel builder's responsibility.

10.9 Insulation properties 10.9.3 Impulse withstand voltage Is the panel builder's responsibility.

10.9 Insulation properties10.9.4 Testing of enclosures made of insulating materialIs the panel builder's responsibility.

10.10 Temperature rise
The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.

10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.13 Mechanical function

The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

TECHNICAL DATA ETIM 7.0

Low-voltage industrial components (EG000017) / Power circuit-breaker for trafo/generator/installation protection (EC000228)

Bectric engineering, automation, process control engineering / Low-voltage switch technology / Orcuit breaker (LV < 1 kV) / Orcuit breaker for power transformer, generator and system protection (ecl@ss10.0.1-27-37-04-09 [AJZ716013])

Rated permanent current lu 100 A

Rated voltage 690 - 690 V


Rated short-circuit breaking capacity lcu at 400 V, 50 Hz $^{150}\,\mathrm{kA}$

Overload release current setting 50 - 100 A

Adjustment range short-term delayed short-circuit release 100 - 1000 A

Adjustment range undelayed short-circuit release 1200 - 1200 A

Integrated earth fault protection No

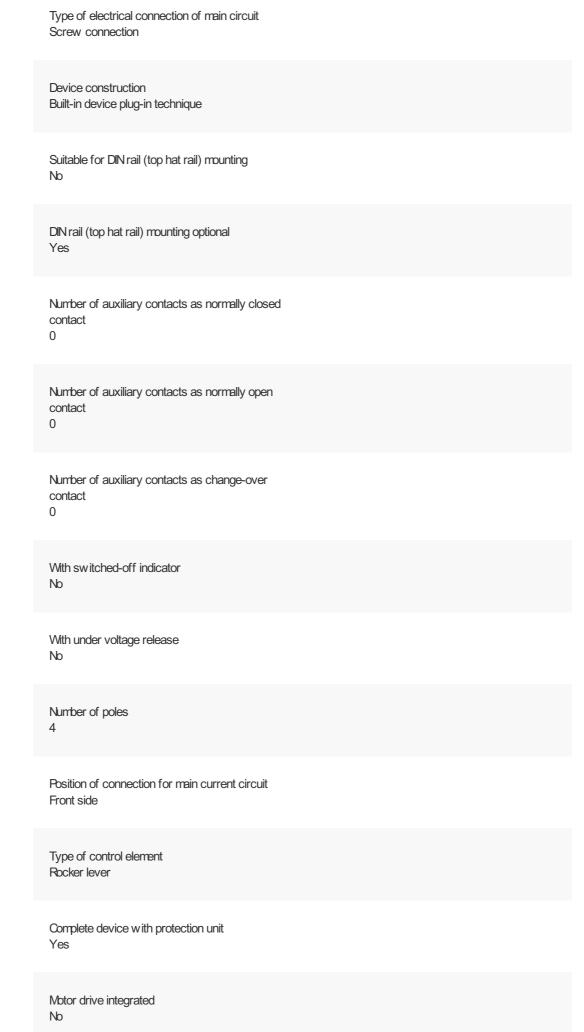

Motor drive optional Yes

Degree of protection (IP) IP20

CHARACTERISTICS

Characteristic curve



Characteristic curve



Let-through current

Characteristic curve



Let-through energy

DIMENSIONS



☐ Blow out area, minimum clearance to adjacent parts

☐ Minimum clearance to adjacent parts









