

FDV


Soft Pro Quick Direct

El nr	32 005 10
Article nr	131004
EAN	7090015371120



Lysteknikk

Type lyskilde	LED (Citizen COB LED)
Spennning	230VAC 50/60Hz
Watt	10W
Systemeffekt (W)	12W
Effektiv lysstrøm (lm)	760lm
Effekt	63lm/W
Fargetemperatur	3000K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM<3
Levetid	62000 L80
Lysspredning	60°

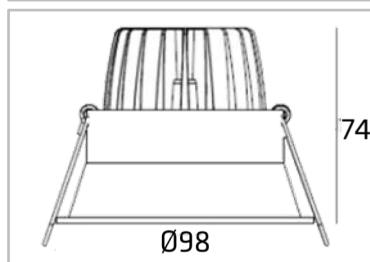

Dimmetype

Type	Dimbar faseavsnitt
------	--------------------

Beskyttelse

Isolasjonsklasse	Klasse II
IP-grad	IP44

Montering/Tilkobling

Montering	Innfelling
Kabling	Hurtigklemme

Materialer og overflater

Armaturhus	Aluminium die-cast
Farge	Matt hvit (RAL 9010)
Optikk/Reflektor	Acrylic/Alu

Dimensjoner (mm)

Høyde (H)	74 mm
Diameter (D)	Ø98 mm
Innfellingsdiameter	Ø89-92 mm
Vekt	0,26kgs


Energi og godkjenning

Energiklasse	A++
Godkjenning	CE
Safety standard	EN 61347-2-13:2014+AMD1:2017, EN 6134701:2015
EMC standard	EN 55015:2013+A1:2015, EN 61547:2009, EN 61000-3-2:2014, EN 61000-3-3:2013

Forpakning

Eske dimensjon	130x120x90mm
Eske Vekt	0,29 kgs
Kartong Dimensjon	500x410x300 mm
Antall/Kartong	36 stk
Kartong Vekt	12,9 kgs

Soft Pro

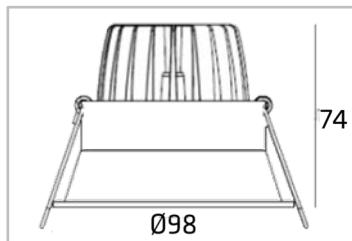

IMPORTANT INFORMATION:



1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. For indoor use only.

MAIN PARAMETER:

Product	131004
Rated Voltage	AC 220-240V 50/60Hz
LED Watt	10W
System eff	12W
LED	Citizen LED COB
LED Driver	Constant Current 260mA
Color Temperature	3000K
Protection	Class II
Beam Angle	60°
IP Rated	IP20
Operation Temperature	-25°C <ta<45°C
Cut-out	Ø89-Ø92mm
Product Size	Ø98mmxH74mm


INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

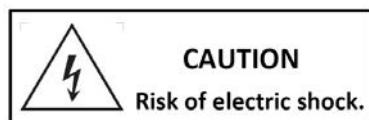


INSTALLATION STEPS:

1. Cut-out for the downlight.

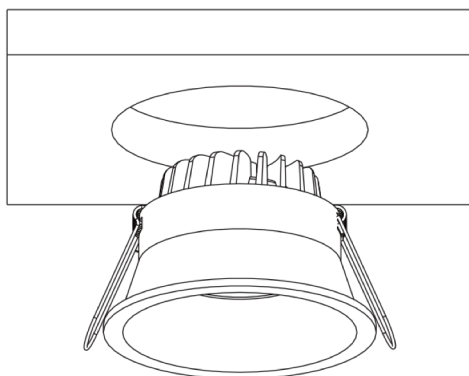

Article nr	Cut-Out
131004	Ø89-Ø92 mm

2. Connect Mains supply to the quick connection terminal block of LED driver.
Slide the mounting spring clips into the ceiling cut-out and push the luminaire up into cutting hole. Ensure that it is securely located.

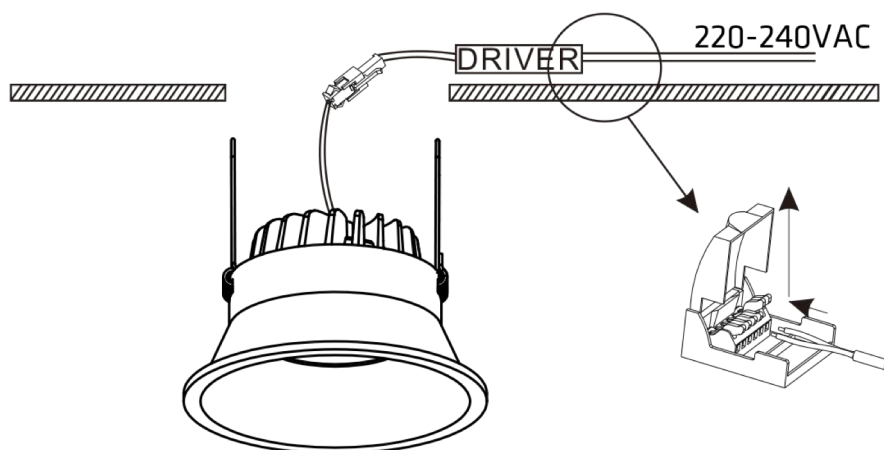

3. Switch on the power supply.

