

FDV

Mini Bucket

El nr	31 925 12
Article nr	280611
EAN	7090015370055



Lysteknikk

Type lyskilde	COB LED
Spennning	230VAC 50/60Hz
Watt	7W
Systemeffekt (W)	9W
Effektiv lysstrøm (lm)	502lm
Effekt	56lm/W
Fargetemperatur	3000K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM<5
Levetid	35000 L80
Lysspredning	38°

Dimmetype

Type	Ikke dimbar
------	-------------

Beskyttelse


Isolasjonsklasse	Klasse I
IP-grad	IP54

Materialer og overflater

Armaturhus	Aluminium die-cast
Farge	Antrasit
Optikk	Glass

Energi og godkjenning

Energiklasse	A
Godkjenning	CE
Safety standard	EN 60598-1:2015, EN 60598-2-2:2012, EN 62471:2008, EN 62493:2015

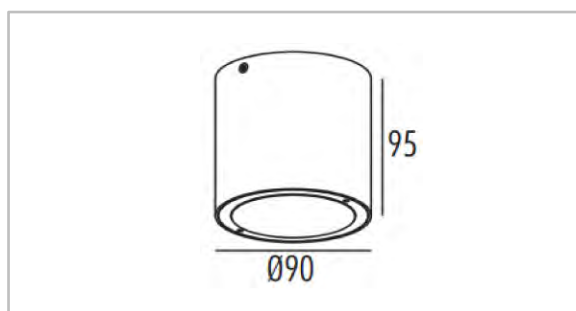

Montering/Tilkobling


Montering	Utenpåliggende
Kabling	Hurtigklemme

Dimensjoner (mm)

Høyde (H)	95 mm
Diameter (D)	Ø90 mm
Vekt	0,85 kgs

Forpakning

Eske dimensjon	95x95x100 mm
Eske Vekt	0,92 kgs
Kartong Dimensjon	
Antall/Kartong	
Kartong Vekt	

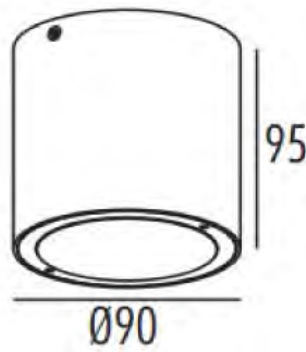

Warning:


1. Before starting of installation please read this leaflet carefully and keeps it for future reference.
2. When installation, please conforms to the instruction of equipment and installed by professionals.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.

I . Main parameter

Rated voltage: 200-240V 50Hz
Rated power: 7W
System power: 9W
LED: CREE COB
Color Temperature: 3000K Warm White
Protection: CLASS I
IP rated: IP54
Product Size: Ø90mmxH95mm


II . Installation direction maintenance

1. First, please make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
2. Second, should turn off the power.

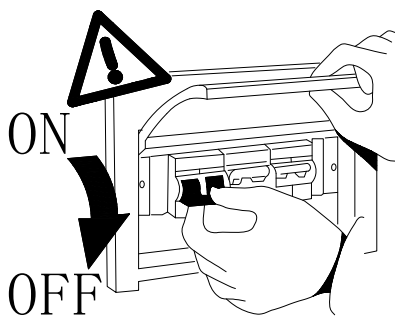


III. Installation steps (please see the drawings)

1. Loose the canopy by turning the screws on the two sides of fixture.

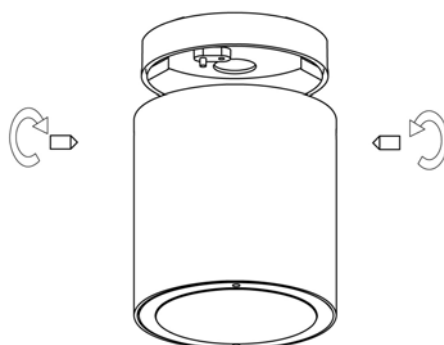


2. Select the required position for the luminaire. Drill a small hole to allow power cable to pass through. Feed the power cable through the hole in the center of canopy. Fix the canopy to the ceiling.

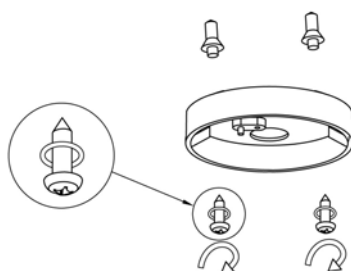


3. Connect Mains supply to the terminal block of luminaire.

- Mains supply LIVE (Brown) – L
- Mains supply NEUTRAL (Blue) – N
- Mains supply EARTH (Yellow/Green) - E

IMPORTANT: These Luminaires must be earthed.

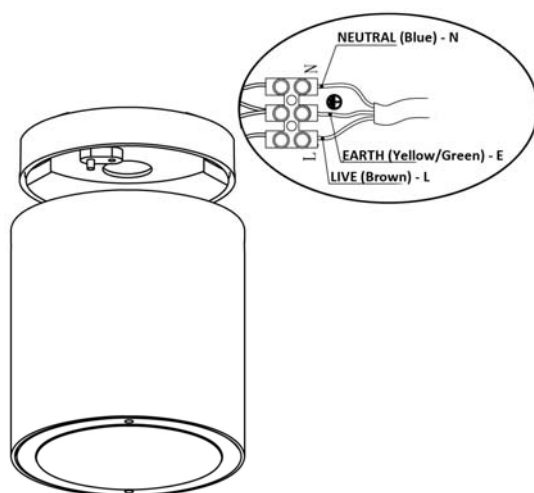

4. Replace main body of the luminaire ensuring that it is securely located. Switch on the power supply.

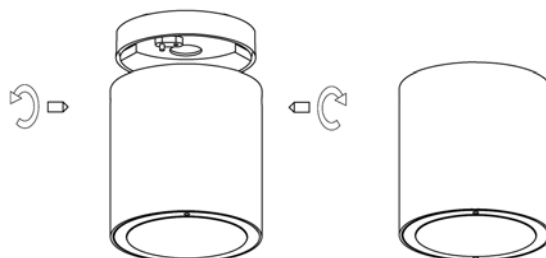

IV. Safety directions

1. Should be installed by professional electrician.

 Warning	If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard. –For type Y attachments
---	---

2. If there is any damage on the housing or glass cover, should view it as disqualified products that cannot be used.

