


FDV

Galaxy Park JR 40W

El nr	35 855 20
Article nr	604055
EAN	7090015377610



CREE **INVENTRONICS**

Lysteknikk

Type lyskilde	LED (Cree X-TE SMD LED)
Spennning	230VAC 50/60Hz
Watt	40W
Systemeffekt (W)	40W
Effektiv lysstrøm (lm)	4000 lm
Effekt	100 lm/W
Fargetemperatur	3000K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM<5
Levetid (IEC62717 Ta25)	70 000h L80B50
Lysspredning	150x80°

Dimmetype

Type	Ikke Dimbar
------	-------------

Beskyttelse


Isolasjonsklasse	Klasse II
IP-grad (armaturhus)	IP66
IP-grad (driver)	IP20
IK-grad	IK08

Materialer og overflater

Armaturhus	Aluminium Die-cast
Farge	Mørk grå (RAL7024)
Optikk	Glass

Energi og godkjenning

Energiklasse	A+-A++ (F)
Godkjenning	CE, RoHS
Safety standard	EN 55015:2013/A1:2015, EN 61547:2009, EN 61000-3-2:2014, EN 61000-3-3:2013

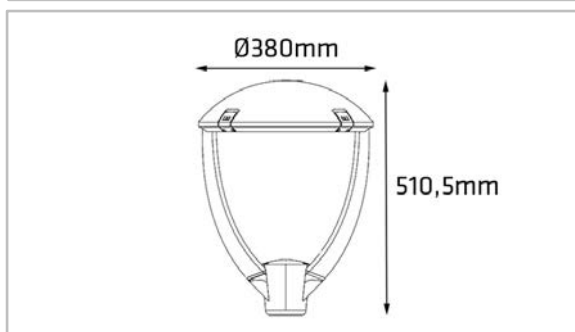

Montering/Tilkobling

Montering	Utendørs
Kabling	6m ledning AC

Dimensjoner (mm)



Høyde (H)	510,5 mm
Diameter (D)	Ø380 mm
Vekt	7,00 kgs

Forpakning

Kartong Dimensjon	460x460x230 mm
Antall/Kartong	1 stk
Kartong Vekt	9,50 kgs

BEYOND LIGHTING

Galaxy Park JR

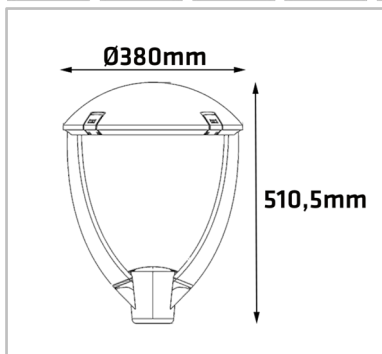

IMPORTANT INFORMATION:


1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. For outdoor use.

MAIN PARAMETER:

Product	604055
Rated Voltage	AC 90-305V 50/60Hz
LED watt	40W
System eff	40W
LED	CREE X-TE SMD LED
LED Driver	Constant Current 0,63A
Color Temperature	3000K
Protection	Class II
Beam Angle	150x80°
IP Rated	IP66
Operation Temperature	-30°C <ta<45°C
Product Size	Ø380x510,5mm

INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

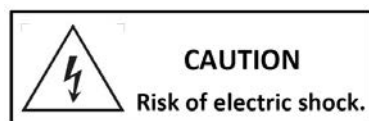

INSTALLATION STEPS:

1. Select the required position for the luminaire. Ensure the fixings are suitable to withstand the weight of this product.


WARNING: The luminaire is heavy and must have suitable fixings.

Note: use inner sleeve attached for diameter Ø60mm.



2. Provide a power supply to the luminaire using a suitable cable. Connect the mains supply to the luminaire.

- Mains supply LIVE (Brown) – L
- Mains supply NEUTRAL (Blue) – N



3. Switch on the power supply.