

TECHNICAL DATA

ABB i-bus® KNX

IPR/S 3.5.1

IP Router Secure

**Description of product**


The IP Router Secure 3.5.1 is the interface between KNX installations and IP networks. It can be used as a line coupler or area coupler and can utilize the local network (LAN) for exchange of telegrams between lines/areas.

KNX devices can be programmed via the LAN using the ETS (five tunneling servers are available). The device uses the KNXnet/IP protocol or the KNXnet/IP Security protocol from the KNX Association (routing and tunneling).

Alternatively, the device can communicate via unicast.

The device is powered by 12 to 30 V DC or PoE (Power over Ethernet) to IEEE 802.3af class 1.


Dimension drawing

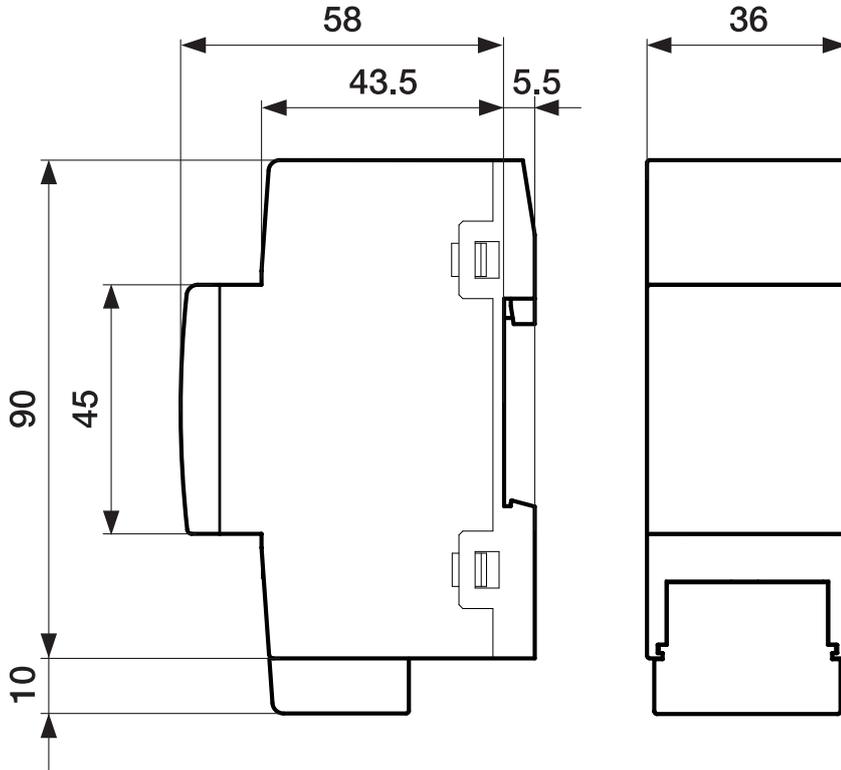


2CDC072020F0015

Connection

LAN

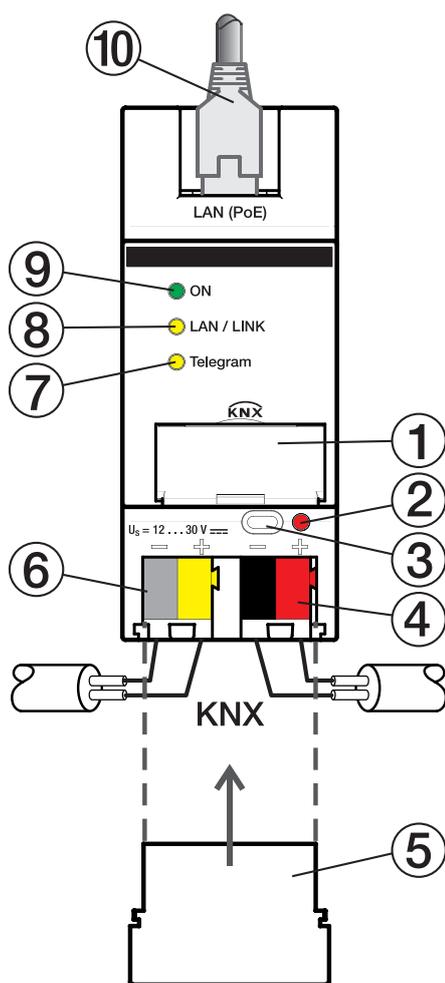

LAN/PoE

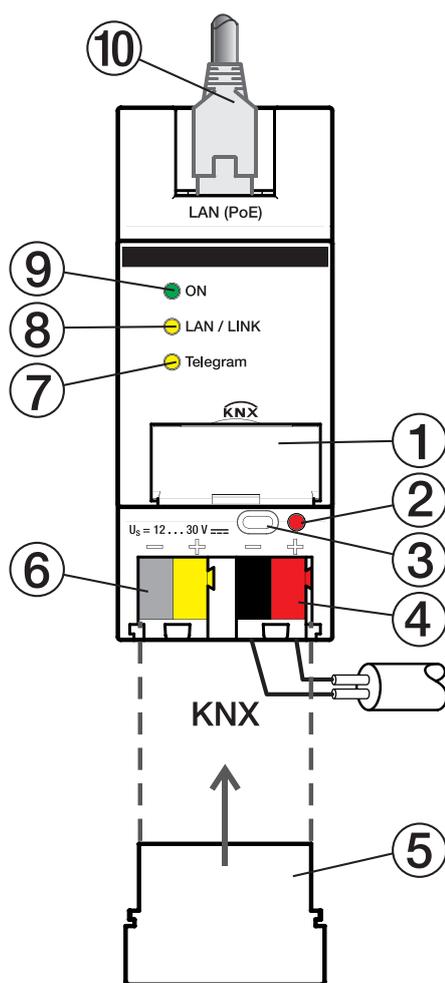

2CDC072009F0015

2CDC072010F0015

LEGEND

- 1 Label carrier
- 2 Programming LED
- 3 Programming button
- 4 KNX connection
- 5 Cover cap
- 6 Power supply connection U_s
- 7 Telegram LED
- 8 LAN/LINK LED
- 9 ON LED
- 10 LAN or LAN/PoE connection

NOTE

It is also possible to power the Router via the voltage output without choke of an ABB KNX power supply (type SV/S).

Technical data		
Supply	Supply voltage U_s	12...30 V DC (+10% / -15%) or PoE (IEEE 802.3af class 1)
	Power loss	Maximum 1.8 W
	Current consumption, supply voltage	Maximum 120 mA at 12 V
	Rated voltage U_n	12 V DC
	KNX current consumption	< 10 mA
Connections	KNX	Bus connection terminal
	Operating voltage	Plug-in terminal
	LAN	RJ45 socket for 10/100BaseT, IEEE 802.3 networks, AutoSensing
Operating and display elements	Red LED and button	Assignment of the physical address
	Green "On" LED	Ready indicator
	Yellow "LAN/Link" LED	Network connection indicator
	Yellow "Telegram" LED	KNX telegram traffic indicator
Degree of protection	IP 20	To EN 60 529
Protection class	II	To EN 61 140
Isolation category	Overtoltage category	III to EN 60 664-1
	Pollution degree	2 to EN 60 664-1
KNX safety extra low voltage	SELV 30 V DC	
Temperature range	Operation	-5 °C...+45 °C
	Storage	-25 °C...+55 °C
	Transport	-25 °C...+70 °C
Ambient conditions	Maximum air humidity	95%, no condensation allowed
	Atmospheric pressure	Atmosphere up to 2,000 m
Design	Modular installation device (MDRC)	Modular installation device, pro M
	Dimensions	90 x 36 x 63.5 mm (H x W x D)
	Mounting width	2x 18 mm modules
Mounting	On 35 mm mounting rail	To EN 60 715
Mounting position	Any	
Weight	0.1 kg	
Housing, color	Plastic, halogen free, gray	
Approvals	KNX to EN 50491 and EN 60 669-2-5	
CE marking	In accordance with the EMC and Low Voltage Directives	

Software				
Device type	Application	Maximum number of group objects	Maximum number of group addresses	Maximum number of assignments
IPR/S 3.5.1	IP Router Secure/...*	0	0	0

* ... = Current version number of the application. **Please refer to the software information on our homepage.**

Ordering details					
Device type	Product Name	Order No.	bbn 40 16779 EAN	Weight 1 pc. [kg]	Packaging [pcs.]
IPR/S 3.5.1	IP Router Secure, REG	2CDG110176R0011	90650 0	0.1	1

—
NOTE

Please refer to the IPR/S 3.5.1 IP Router Secure product manual for a detailed description of the application. It is available free of charge at www.abb.com/knx.

ETS 5 and the current version of the device application are required for programming.

If the device is to be operated in KNX Secure mode, the commissioning key on the side of the unit will be required as well.

The latest version of the application and corresponding software information are available for download from www.abb.com/knx. After import into ETS, the application appears in the Catalogs window under Manufacturers/ABB/System components/Coupler.

The device does not support the locking function of a KNX device in ETS. If you use a BCU code to inhibit access to all the project devices, it has no effect on this device. Data can still be read and programmed.

Exception: When KNX Secure mode is activated, the device can no longer be programmed with a different ETS.



ABB STOTZ-KONTAKT GmbH
Eppelheimer Straße 82
69123 Heidelberg, Germany
Telefon: +49 (0)6221 701 607
Telefax: +49 (0)6221 701 724
E-Mail: knx.marketing@de.abb.com

Further Information and Local Contacts:
www.abb.com/knx

© Copyright 2019 ABB. We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document. We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of this contents - in whole or in parts - is forbidden without prior written consent of ABB AG.