


## EPIC® H-B 32 TG

Housing design H-B for 2 inserts.

Two connector inserts in single housing with two levers ensure a high level of safety and are suitable for use in control systems.

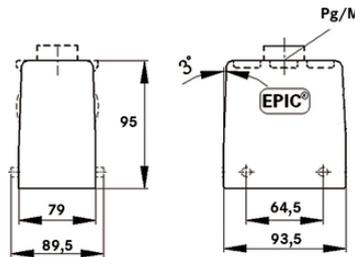

### Benefits

Two inserts in one housing. With two levers for high safety

M40 housing extension on M50 with SKINTOP 53112083 possible (clamping range 27 - 35 mm)

### Application range

Plant engineering  
Control engineering  
Plastics industry

### Product features

Hood  
Bolts for double lever  
Straight cable entry  
Versions with / without neck

### Technical Data

Classification ETIM 5:

ETIM 5.0 Class-ID: EC000437

ETIM 5.0 Class-Description: Housing for industrial connectors

Classification ETIM 6:

ETIM 6.0 Class-ID: EC000437

ETIM 6.0 Class-Description: Housing for industrial connectors

Material:

Housing: powder-coated aluminium alloy, grey

Lever: zinc-plated steel

Sealing: NBR

Protection rating:

IP 65 (latched)

Temperature range:

-40°C to +100°C, short-term up to +125°C

### Note

Last Update (27.10.2020)

©2020 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16

## **EPIC® H-B 32 TG**

Photographs and graphics are not to scale and do not represent detailed images of the respective products.  
Prices are net prices without VAT and surcharges. Sale to business customers only.

**EPIC® H-B 32 TG**

Article number	Article description	M	PG	Neck	Pieces / PU
H-B housing: hood (straight cable entry, bolts for double lever)					
10133000	H-B 32 TG 21	-	21	yes	5
10134000	H-B 32 TG 29	-	29	yes	5
19134000	H-B 32 TG M32	32	-	-	5
19134400	H-B 32 TG M40	40	-	-	5

Last Update (27.10.2020)

©2020 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.  
PN 0456 / 02\_03.16