

TECHNICAL DATA

ABB i-bus® KNX

USB/S 1.2

USB Interface



Description of product

The ABB i-bus® KNX USB Interface USB/S 1.2 is a KNX modular installation device (MDRC) in Pro M design for installation in the distribution board on a 35 mm mounting rail.

The USB Interface enables communication between ETS and a KNX system (programming, bus monitoring, group monitoring). Visual display systems, or other clients, can also use the USB to access KNX.

The device is connected to the computer via a type B USB cable and is ready for use as soon as the USB is connected. The necessary driver is automatically installed under Windows the first time it is connected.

Operating status and telegram traffic are displayed via three LEDs. The KNX and USB components are electrically isolated from each other.

USB suspend

As soon as the computer goes into sleep mode or the USB Interface is not being used, the USB/S 1.2 can be put into sleep mode. In this case, the LEDs will turn off.

Bus monitoring mode and group monitoring mode

The USB Interface supports the bus monitoring mode. The USB/S 1.2 cannot be used for further operations, such as the download function, when switched to the bus monitoring mode.

In group monitoring mode, further operations can be performed in parallel.

KNX long frames

Standard KNX telegrams are restricted to a length of 15 bytes of payload data. This is referred to as APDU = 15. For certain operations it can be advantageous to increase the load capacity. This referred to as "long frames." Long frames can enable faster downloads for certain devices and are required to program KNX Secure devices.

It is necessary for the device that is supposed to be programmed (and all couplers that are connected between it and the USB Interface) to support long frames. The ETS (from version ETS5) recognizes this automatically and adjusts the length of the telegrams accordingly.

The USB/S 1.2 supports a maximum APDU length of 55.

— **NOTE**

For the shortest possible download time, the USB Interface should be installed in the same line as the target device.

Commissioning


As soon as the USB and KNX are connected, the USB Interface appears in the ETS under “Discovered Interfaces.” Then all you have to do is change the physical address via the connection settings. No further settings are required.

The USB Interface is supplied with the physical address 15.15.255.


No application program is required, and the programming button/LED are without a function.

The USB Interface is supported as of version ETS3.0f.

Dimension drawing

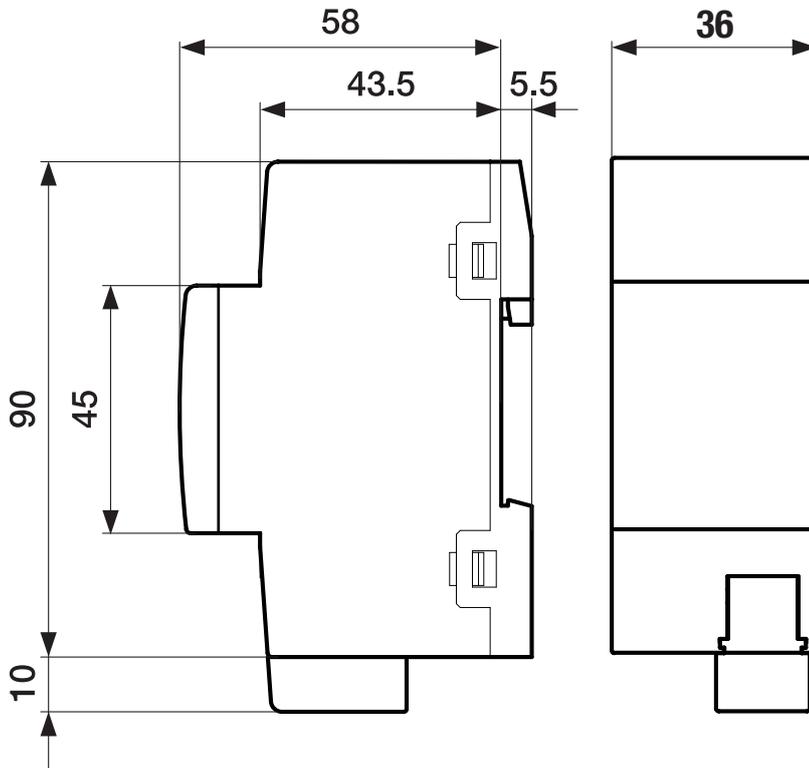

Connection

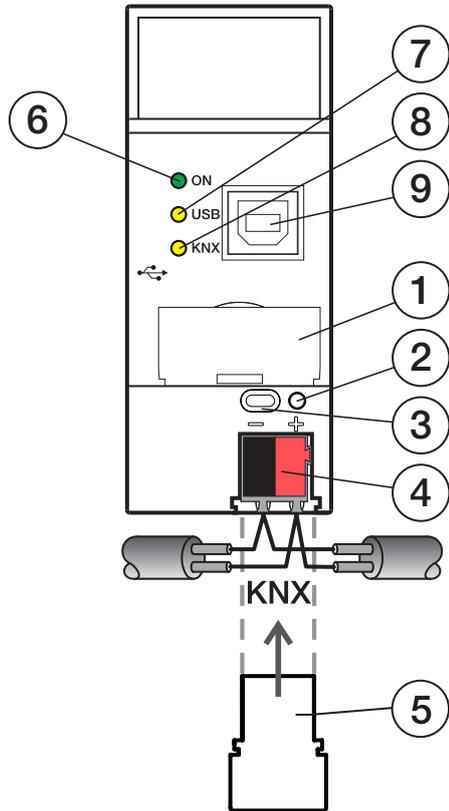

LEGEND

- 1 Label carrier
- 2 KNX programming LED (red) (no function)
- 3 KNX programming button (no function)
- 4 Bus connection terminal
- 5 Cover cap
- 6 ON LED (green)
- 7 USB LED (yellow)
- 8 KNX LED (yellow)
- 9 Type B USB connector

Technical data		
Supply	Supply voltage	
	KNX	Via ABB i-bus® KNX (21...30 V DC)
	USB	5 V DC
	Current consumption	
	KNX	Max. 3 mA
	USB	Max. 15 mA
	Power loss	
	KNX	Max. 100 mW
	USB	Max. 75 mW
	Total power dissipation	Max. 200 mW
Connections	KNX	KNX connection terminal, 0.8 mm Ø, solid wire
	USB	USB standard 1.1, type B connector Max. cable length of 5 m
Operating and display elements	LED green	Ready indicator
	LED yellow	USB ready indicator
	LED yellow	KNX bus connected indicator
	KNX programming LED and button	Without function
Degree of protection	IP 20	To EN 60 529
Protection class	II	To EN 61 140
Isolation category	Overvoltage category	III to EN 60 664-1
	Pollution degree	II to EN 60 664-1
KNX safety extra low voltage	SELV 24 V DC	SELV 24 V DC
Temperature range	Operation	- 5...+45 °C
	Transport	-25...+70 °C
	Storage	-25...+55 °C
Ambient conditions	Maximum air humidity	95%, no condensation allowed
	Atmospheric pressure	Atmosphere up to 2,000 m
Design	Modular DIN rail component (MDRC)	Modular installation device
	Design	pro M
	Housing/color	Plastic housing, gray, halogen-free
Dimensions	Dimensions	90 x 36 x 63.5 mm (H x W x D)
	Mounting width in space units	2x 18 mm modules
Mounting	On 35 mm mounting rail	To EN 60 715
Mounting position	Any	
Weight		0.08 kg
Fire classification		Flammability V-0 as per UL94
Approvals	KNX certification	To EN 50491 and EN 60 669-2-5
CE marking	In accordance with the EMC and Low Voltage Directives	

Software						
Device type	Application	Max. number of group objects	Max. number of group addresses	Max. number of assignments	Max. number of logic elements	WebUI inputs and outputs
An ETS application is not necessary.						

Ordering details						
Device type	Product Name	Order No.	bbn 40 16779 EAN	Weight 1 pc. [kg]	Packaging [pcs.]	
USB/S 1.2	USB Interface	2CDG110243R0011	06450 7	0.08	1	



ABB STOTZ-KONTAKT GmbH

Eppelheimer Straße 82
69123 Heidelberg, Germany
Telefon: +49 (0)6221 701 607
Telefax: +49 (0)6221 701 724
E-Mail: knx.marketing@de.abb.com

Further Information and Local Contacts:
www.abb.com/knx

© Copyright 2019 ABB. We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document. We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of this contents - in whole or in parts - is forbidden without prior written consent of ABB AG.