


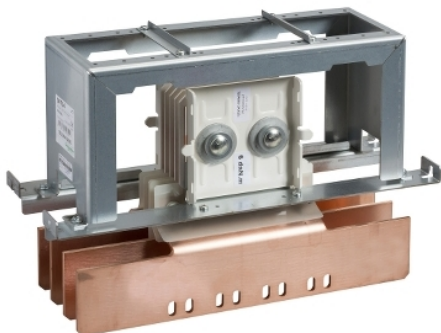

Teknisk informasjon

Serie	PrismaSeT
Produktspekter	PrismaSeT P
Produkt eller type komponent	Grensesnitt og tilkobling Canalis
Kompatibel med	PrismaSeT P enclosure
Tilbehør / separat del kategori	Grensesnitt tilbehør
Standarder	IEC 61439-2, inside enclosure IEC 61439-1, inside enclosure
Produktsertifikater	ASTA

Komplementær

Skap - utstyrstilkobling	KT with Canalis
Antall poler	3P
Skap/kapsling beskrivelse	Cubicle - width 650 mm
Skapdybde	400 mm: front 400 + 400 mm: rear
Installert utstyr	ComPact: drawout NS630b...1000 - control: direct front rotary handle vertical installation ComPact: drawout NS1250 - control: direct front rotary handle vertical installation ComPact: drawout NS630b...1000 - control: motor mechanism vertical installation ComPact: drawout NS1250 - control: motor mechanism vertical installation ComPact: drawout NS630b...1000 - control: toggle vertical installation ComPact: drawout NS1250 - control: toggle vertical installation ComPact: fixed NS630b...1000 - control: toggle vertical installation ComPact: fixed NS1250 - control: toggle vertical installation ComPact: fixed NS630b...1000 - control: direct front rotary handle vertical installation ComPact: fixed NS1250 - control: direct front rotary handle vertical installation ComPact: fixed NS630b...1000 - control: motor mechanism vertical installation ComPact: fixed NS1250 - control: motor mechanism vertical installation ComPact: fixed NS1600 - control: toggle vertical installation ComPact: fixed NS1600 - control: direct front rotary handle vertical installation ComPact: fixed NS1600 - control: motor mechanism vertical installation ComPact: drawout NS1600 - control: direct front rotary handle vertical installation ComPact: drawout NS1600 - control: motor mechanism vertical installation ComPact: drawout NS1600 - control: toggle vertical installation Masterpact: fixed NT06...10 - control: toggle vertical installation Masterpact: fixed NT06...10 - control: motor mechanism vertical installation Masterpact: fixed NT12 - control: toggle vertical installation Masterpact: fixed NT12 - control: motor mechanism vertical installation Masterpact: fixed NT16 - control: toggle vertical installation Masterpact: fixed NT16 - control: motor mechanism vertical installation
[Ie] nominell driftsstrøm	1600 A
Farge	Natural
Høyde	410 mm
Bredde	600 mm
Dybde	285 mm
Vekt	27,2 kg

Informasjonen som gis i denne dokumentasjonen inneholder generelle beskrivelser og/eller tekniske egenskaper av ytelsen til produktene i dokumentet. Denne dokumentasjonen er ikke ment som en erstatning for, og må ikke brukes til å bestemme egnethet eller påliteligheten til disse produktene for spesifikke brukerapplikasjoner. Enhver bruker eller integrator er ansvarlig for å utføre egnethet, analyse og testing av produktene med hensyn til aktuell bruk. Verken Schneider Electric Industries SAS eller noen av deres datterselskaper skal være ansvarlig for misbruk av informasjonen som finnes her.

[illegible]

Offer Sustainability

REACH-regelverk	 REACH-erklæring
REACH fri for SVHC	Ja
EU RoHS-direktiv	I samsvar  EU RoHS-erklæring
Fri for giftige tungmetaller	Ja
Kvikksølvfri	Ja
Informasjon om RoHS-unntak	 Ja
Kinas RoHS-forskrift	 Kinas RoHS-Erklæring