


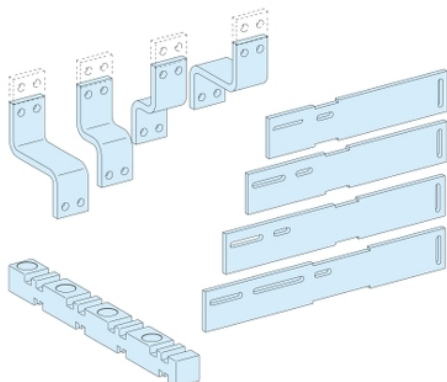

Teknisk informasjon

Serie	PrismaSeT
Produktspekter	PrismaSeT P
Produkt eller type komponent	Forbindelse
Kompatibel med	PrismaSeT P enclosure
Tilbehør / separat del kategori	Strømfordelingstilbehør
Standarder	IEC 61439-2, inside enclosure IEC 61439-1, inside enclosure
Produktsertifikater	ASTA

Komplementær

Skap - utstyrstilkobling	Linergy busbar
Antall poler	3P
Skap/kapsling beskrivelse	Cubicle - width 650 mm
Skapdybde	400 mm: front 400 + 400 mm: rear
Installert utstyr	ComPact: fixed NS630b...1000 - control: toggle vertical installation ComPact: fixed NS1250 - control: toggle vertical installation ComPact: fixed NS630b...1000 - control: direct front rotary handle vertical installation ComPact: fixed NS1250 - control: direct front rotary handle vertical installation ComPact: fixed NS630b...1000 - control: motor mechanism vertical installation ComPact: fixed NS1250 - control: motor mechanism vertical installation
[Ie] nominell driftsstrøm	1250 A
Skinne dimensjon	80 x 10 mm
Høyde	150 mm
Bredde	550 mm
Dybde	300 mm
Vekt	6,9 kg

Antall pr. sett	Sett á 1
Skap/kapsling bredde	650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed toggle vertical 3P 1 front connection on Canalis 17 650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed direct front rotary handle vertical 3P 1 front connection on Canalis 17 650 mm 800 mm PrismaSeT P cubicle ComPact NS1250 fixed toggle vertical 3P 1 rear connection on Canalis 16 650 mm 800 mm PrismaSeT P cubicle ComPact NS1250 fixed direct front rotary handle vertical 3P 1 rear connection on Canalis 16 650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 3P 1 front connection on Canalis 17 650 mm 800 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 3P 1 rear connection on Canalis 16 650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed toggle vertical 3P 1 front connection on Canalis 17 650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed direct front rotary handle vertical 3P 1 front connection on Canalis 17 650 mm 800 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed toggle vertical 3P 1 rear connection on Canalis 16 650 mm 800 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed direct front rotary handle vertical 3P 1 rear connection on Canalis 16 650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 3P 1 front connection on Canalis 17 650 mm 800 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 3P 1 rear connection on Canalis 16 650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed toggle vertical 3P 1 front connection on adaptor 14 650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed direct front rotary handle vertical 3P 1 front connection on adaptor 14 650 mm 400 mm PrismaSeT P cubicle ComPact NS1250 fixed motor mechanism vertical 3P 1 front connection on adaptor 14 650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed toggle vertical 3P 1 front connection on adaptor 12 650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed direct front rotary handle vertical 3P 1 front connection on adaptor 12 650 mm 400 mm PrismaSeT P cubicle ComPact NS630b...1000 fixed motor mechanism vertical 3P 1 front connection on adaptor 12

Offer Sustainability

REACH-regelverk	 REACH-erklæring
REACH fri for SVHC	Ja
EU RoHS-direktiv	Proaktivt i samsvar (Produktet inngår ikke i EUs RoHS direktivet)  EU RoHS-erklæring
Fri for giftige tungmetaller	Ja
Kvikksølvfri	Ja
Informasjon om RoHS-unntak	 Ja
Kinas RoHS-forskrift	 Kinas RoHS-Erklæring