




Farge: ■ lysegrå

Electrical data			
Ratings per IEC/EN		Ex information	
Nominell spenning (III/3)	800 V	Nominell strlm (Ex e II)	33 A
Nominell strøm	41 A		
Fysiske data			
Bredde	35,3 mm / 1.39 tommer		
Høyde	4,1 mm / 0.161 tommer		
Dybde	19 mm / 0.748 tommer		
Jumper-tilordning	1-2-3-4-5		
Materielle data			
Note (material data)	Information on material specifications can be found here		
Farge	lysegrå		
Brannbelastning	0.02 MJ		
Vekt	5.4 g		
Komersiell data			
Product Group	22 (TOPJOB S)		
eCl@ss 10.0	27-14-11-40		
eCl@ss 9.0	27-14-11-40		
ETIM 8.0	EC000489		
ETIM 7.0	EC000489		
PU (SPU)	25 Stk		
Pakketype	bag		
Opprinnelsesland	DE		
GTIN	4055143701433		
Tollsatsnummer	85366990990		

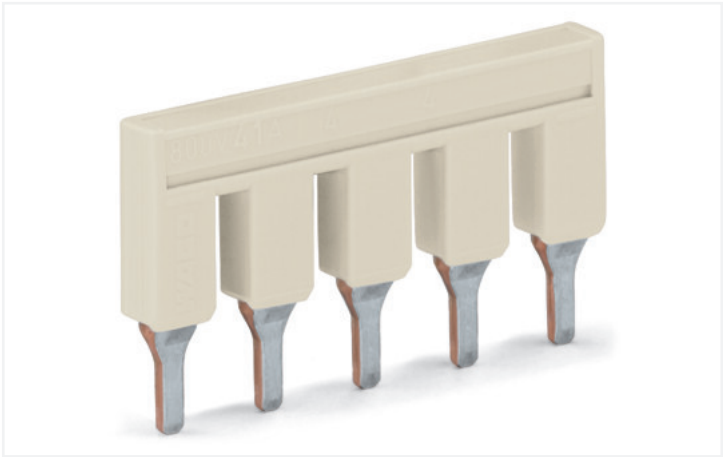

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Godkjenninger / sertifikater

Declarations of conformity and manufacturer's declarations



Godkjenning	Standard	Sertifikatnavn
Railway WAGO GmbH & Co. KG	-	Railway Ready

Nedlastinger

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2006-405


↓

Documentation				
Additional Information		Bid Text		
Technical Section	pdf 2240.62 KB	2006-405	19.02.2019	xml 2.51 KB ↓
		2006-405	28.04.2017	doc 23.50 KB ↓


CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 2006-405 ↓	EPLAN Data Portal 2006-405 ↓
	WSCAD Universe 2006-405 ↓
	ZUKEN Portal 2006-405 ↓

Installasjonsmerknader

Sammenkobling



Insert push-in type jumper bar and push down until it hits backstop.




Removing a push-in type jumper bar:
Insert the operating tool between the jumper and partition wall of the dual jumper slots, then lift up the jumper. Place the operating tool in the center of jumpers for up to five contacts (see above), or alternately on both sides for jumpers with more than five contacts.

Sammenkobling



Custom jumpers are created by breaking and removing jumper contacts (2000, 2001, 2002, 2004 Series).




Marking with a felt-tip pen.


Sammenkobling




Stepping down via push-in type jumper bar.



Stepping down via push-in type jumper bar:
Commoning via closed terminal side with end plate allows jumpering over two cross-section sizes, e.g., from 16 mm² (6 AWG) to 6 mm² (10 AWG) or from 6 mm² (10 AWG) to 2.5 mm² (14 AWG) (see illustration above).



Stepping down via push-in type jumper bar:
Commoning via open terminal side with end plate allows jumpering over two cross-section sizes for 16 mm² (6 AWG) and 10 mm² (8 AWG) and one cross-section size for 6/4/2.5 mm² (10/12/14 AWG). An example: from 16 mm² (6 AWG) to 6 mm² (10 AWG) (see illustration above) or from 10 mm² (8 AWG) to 4 mm² (12 AWG).



Note:
The total current of the outgoing circuits must not exceed the nominal current of the step-down jumper/push-in type jumper bar.