


LVS04406

LINERGY FC DISTRIBUTION BLOCK FOR COMPACT NSX250 4P FIXED/PLUG-IN +CONNECTION

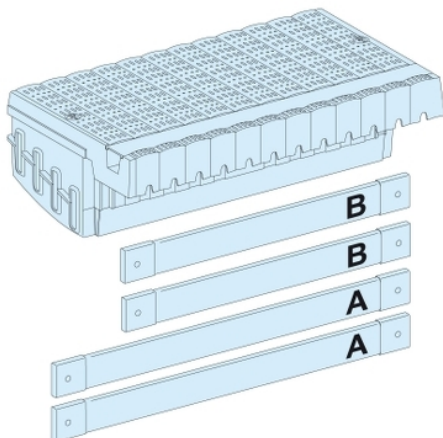

Teknisk informasjon

Serie	Linergy
Produktspekter	Linergy
Produkt eller type komponent	Device feeder
Produktnavn	Linergy FC
Tilbehør / separat del kategori	Tilkoblingstilbehør
Kompatibel med	PrismaSeT P cubicle
Tilgjengelig utstyr	Prefabricated flexible connection to Linergy busbars

Komplementær

Skap/kapsling beskrivelse	Cubicle - width 650 mm
Antall enheter	3 (4P)
Antall poler	4P
Installert utstyr	Compact: fast NSX100...160 uten jordfeilbeskyttelse - kontroll: direkte frontmontert dreiehåndtak - Vertikal installasjon Compact: fast NSX250 uten jordfeilbeskyttelse - kontroll: direkte frontmontert dreiehåndtak - Vertikal installasjon ComPact: fixed NSX100...160 without earth leakage protection - control: motor mechanism - vertical installation ComPact: fixed NSX250 without earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX100...160 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX250 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX100...160 without earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX250 without earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX100...160 without earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX250 without earth leakage protection - control: toggle - vertical installation Compact: fast NSX100...160 med jordfeilbeskyttelse - kontroll: direkte frontmontert dreiehåndtak - Vertikal installasjon Compact: fast NSX250 med jordfeilbeskyttelse - kontroll: direkte frontmontert dreiehåndtak - Vertikal installasjon ComPact: fixed NSX100...160 with earth leakage protection - control: motor mechanism - vertical installation ComPact: fixed NSX250 with earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX100...160 with earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX250 with earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX100...160 with earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX250 with earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX100...160 with earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX250 with earth leakage protection - control: toggle - vertical installation
Montering	Montasjeplate
Monteringsanvisning	Horisontal
[Ui] isolasjonsspenning	750 V AC
[Uimp] Nominell impuls-spenning	8 kV

[Ie] nominell driftsstrøm	675 A at 40 °C
[Ue] merkespenning	690 V
[Ipk] tillatt peakstrøm	50 kA
I²t på	25000000 A².s
Tillatt strøm	675 A at 40 °C 615 A at 60 °C 570 A at 70 °C
Tilkoblingsklemmer	Outgoer: plug in (phase / neutral) , 3 outgoers Supply: flexible bars (phase / neutral) , 32 x 8 mm
Standarder	IEC 61439-2 IEC 61439-1
Produktsertifikater	KEMA ASEFA
Antall pr. sett	Sett á 1
Lengde	440 mm
Høyde	132 mm
Dybde	235 mm
Vekt	8 kg
Farge	Black

Offer Sustainability

REACH-regelverk	 REACH-erklæring
REACH fri for SVHC	Ja
EU RoHS-direktiv	I samsvar  EU RoHS-erklæring
Fri for giftige tungmetaller	Ja
Kvikksølvfri	Ja
Informasjon om RoHS-unntak	 Ja
Kinas RoHS-forskrift	 Kinas RoHS-Erklæring
WEEE	Innen EU må produktet avhendes i henhold til bestemte regler for avfallshåndtering og aldri kastes som husholdningsavfall.