


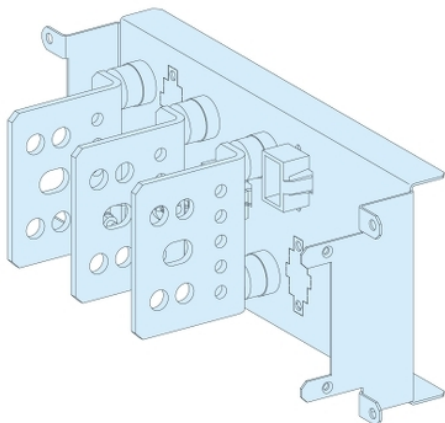

Teknisk informasjon

Serie	PrismaSeT
Produktspekter	PrismaSeT P
Produkt eller type komponent	Connection transfer assembly
Kompatibel med	PrismaSeT P enclosure
Tilbehør / separat del kategori	Strømfordelingstilbehør
Standarder	IEC 61439-2, inside enclosure IEC 61439-1, inside enclosure
Produktsertifikater	ASTA

Komplementær

Skap - utstyrstilkobling	Connection transfer assembly
Antall poler	3P
Skap/kapsling beskrivelse	Cubicle - width 650 mm
Installert utstyr	ComPact: fixed NSX100...160 with earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS100...160 without earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS250 without earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX100...160 without earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX250 without earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS100...160 with earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS250 with earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX100...160 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS250 without earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS100...160 with earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS250 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: motor mechanism horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX100...160 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX250 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX100...160 without earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX250 without earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX100...160 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX250 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX100...160 without earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX250 without earth leakage protection - control: motor mechanism horizontal installation ComPact: fixed NSX100...160 with earth leakage protection - control: motor mechanism horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX100...160 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX250 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX100...160 with earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX250 with earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX100...160 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX250 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX100...160 with earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX250 with earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX100...160 without earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX250 without earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX100...160 with earth leakage protection - control: toggle horizontal installation

[Ie] nominell driftsstrøm	250 A
Skinne dimensjon	20 x 3 mm
Høyde	150 mm
Bredde	350 mm
Vekt	2,84 kg

[illegible]

Offer Sustainability

REACH-regelverk	REACH-erklæring
EU RoHS-direktiv	Proaktivt i samsvar (Produktet inngår ikke i EUs RoHS direktivet) EU RoHS-erklæring
Kvikksølvfri	Ja
Informasjon om RoHS-unntak	Ja
Kinas RoHS-forskrift	Kinas RoHS-Erklæring