


LVS04459

UNIVERSAL CONNECTION TRANSFERT IN DUCT 630A 3P

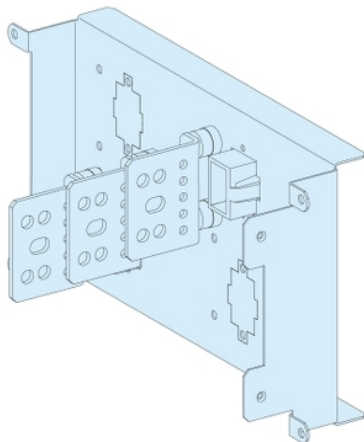

Teknisk informasjon

Serie	PrismaSeT
Produktspekter	PrismaSeT P
Produkt eller type komponent	Connection transfer assembly
Kompatibel med	PrismaSeT P enclosure
Tilbehør / separat del kategori	Strømfordelingstilbehør
Standarder	IEC 61439-2, inside enclosure IEC 61439-1, inside enclosure
Produktsertifikater	ASTA

Komplementær

Skap - utstyrstilkobling	Connection transfer assembly
Antall poler	3P
Skap/kapsling beskrivelse	Cubicle - width 650 mm
Installert utstyr	EasyPact: fixed CVS400 without earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS630 without earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX400 with earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX630 with earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX400 without earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX630 without earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX400 without earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX630 without earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX400 with earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX630 with earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX400 with earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX630 with earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS400 without earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS630 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX400 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX400 without earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX400 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX400 without earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX400 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX400 without earth leakage protection - control: motor mechanism horizontal installation ComPact: fixed NSX630 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX630 without earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX630 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX630 without earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX630 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX630 without earth leakage protection - control: motor mechanism horizontal installation EasyPact: fixed CVS400 with earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS400 with earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS630 with earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS630 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX400 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX400 with earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX400 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX400 with earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX400 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX400 with earth leakage protection - control: motor mechanism horizontal installation ComPact: fixed NSX630 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX630 with earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX630 with earth leakage protection - control: direct front rotary handle horizontal installation

[Ie] nominell driftsstrøm	630 A
Skinne dimensjon	32 x 6 mm
Høyde	200 mm
Bredde	350 mm
Vekt	3,04 kg

[illegible]

Offer Sustainability

REACH-regelverk	REACH-erklæring
EU RoHS-direktiv	Proaktivt i samsvar (Produktet inngår ikke i EUs RoHS direktivet) EU RoHS-erklæring
Kvikksølvfri	Ja
Informasjon om RoHS-unntak	Ja
Kinas RoHS-forskrift	Kinas RoHS-Erklæring