


LVS03404

W400 ADJUSTABLE MOD. DEV. RAIL PRISMA P

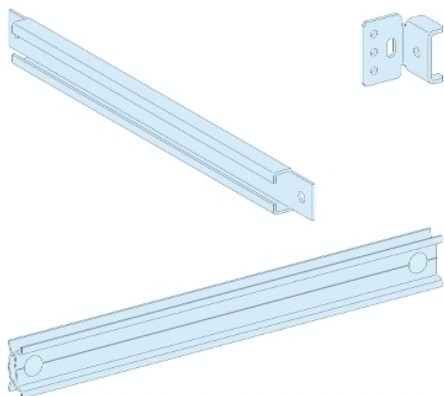

Teknisk informasjon

Serie	PrismaSeT
Produktspekter	PrismaSeT P
Produkt eller type komponent	Skinne
Tilbehør / separat del kategori	Installasjonstilbehør
Kompatibel med	PrismaSeT P
Type festeskinne	Modulær Regulerbar
Installert utstyr	Compact: fast INS100 - kontroll: direkte frontmontert dreiehåndtak - Vertikal installasjon Compact: fast INS160 - kontroll: direkte frontmontert dreiehåndtak - Vertikal installasjon Compact: fast INS40 - kontroll: direkte frontmontert dreiehåndtak - Vertikal installasjon Compact: fast INS63 - kontroll: direkte frontmontert dreiehåndtak - Vertikal installasjon Acti 9: fixed modular device Multi 9: fixed modular device Multi 9: fast NG125 uten jordfeilbeskyttelse - kontroll: kipp Compact: fast INS125 - kontroll: direkte frontmontert dreiehåndtak - Vertikal installasjon Acti 9: fixed modular device <= 40 A Multi 9: fixed modular device <= 40 A Compact: fast NG160 uten jordfeilbeskyttelse - kontroll: kipp Compact: fast NG160 NA uten jordfeilbeskyttelse - kontroll: kipp ComPact: fixed NSA125...160 - control: toggle
Polene beskrivelse	1 x 3P: fixed INS100 vertical installation 1 x 4P: fixed INS100 vertical installation 1 x 3P: fixed INS160 vertical installation 1 x 4P: fixed INS160 vertical installation 1 x 3P: fixed INS40 vertical installation 1 x 4P: fixed INS40 vertical installation 1 x 3P: fixed INS63 vertical installation 1 x 4P: fixed INS63 vertical installation 1 x 3P: fixed NG125 1 x 4P: fixed NG125 1 x 3P: fixed INS125 vertical installation 1 x 4P: fixed INS125 vertical installation 1 x 3P: fixed NG160 1 x 4P: fixed NG160 1 x 3P: fixed NG160 NA 1 x 4P: fixed NG160 NA 1 x 3P: fixed NSA125...160 1 x 4P: fixed NSA125...160

Komplementær

Skap/kapsling beskrivelse	Cubicle - width 400 mm depth 400 mm
Kabinett nominell høyde	2000 mm
Antallet vertikale moduler (50 mm)	4 module(s): INS100, direct in 400 mm Widecubicle 5 module(s): INS100, direct in 400 mm Widecubicle 4 module(s): INS125, direct in 400 mm Widecubicle 5 module(s): INS125, direct in 400 mm Widecubicle 4 module(s): INS160, direct in 400 mm Widecubicle 5 module(s): INS160, direct in 400 mm Widecubicle 4 module(s): INS40, direct in 400 mm Widecubicle 4 module(s): INS63, direct in 400 mm Widecubicle 3 module(s): modular device <= 40 A, direct in 400 mm Widecubicle 4 module(s): modular device, direct in 400 mm Widecubicle 5 module(s): NG125 without earth leakage protection , direct in 400 mm Widecubicle 5 module(s): NG160 without earth leakage protection , direct in 400 mm Widecubicle 5 module(s): NG160 NA without earth leakage protection , direct in 400 mm Widecubicle 5 module(s): NSA125...160, direct in 400 mm Widecubicle
9 mm polbredde	20
Antall pr. sett	Sett á 1
Høyde	30 mm
Bredde	325 mm
Dybde	325 mm
Vekt	0,76 kg
Farge	Natural
Materiale	Metall

Miljø

Standarder	IEC 61439-1 IEC 61439-2
Produktsertifikater	ASTA

Offer Sustainability

REACH-regelverk	 REACH-erklæring
REACH fri for SVHC	Ja
EU RoHS-direktiv	Proaktivt i samsvar (Produktet inngår ikke i EUs RoHS direktivet)  EU RoHS-erklæring
Fri for giftige tungmetaller	Ja
Kvikksølvfri	Ja
Informasjon om RoHS-unntak	 Ja
Kinas RoHS-forskrift	 Kinas RoHS-Erklæring