


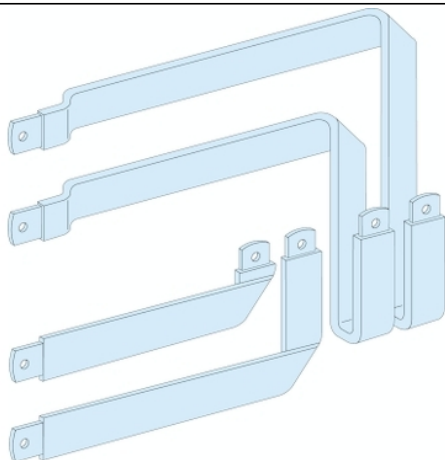

Teknisk informasjon

Serie	Linery
Produktspekter	Linery
Produkt eller type komponent	Forbindelse
Produktnavn	Linery BW
Kompatibel med	PrismaSeT P enclosure PrismaSeT G enclosure Linery BW busbar
Tilbehør / separat del kategori	Strømfordelingstilbehør
Tilgjengelig utstyr	Uten kabel
Standarder	IEC 61439-1, inside enclosure IEC 61439-2, inside enclosure
Produktsertifikater	ASTA

Komplementær

Skap - utstyrsstikobling	Linery BW universal power supply block
Antall poler	4P
Skap/kapsling beskrivelse	Cubicle - width 650 mm Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm
Installert utstyr	ComPact: fixed INS250 - control: direct front rotary handle vertical installation ComPact: fixed INV250 - control: direct front rotary handle vertical installation EasyPact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle vertical installation EasyPact: fixed CVS250 without earth leakage protection - control: direct front rotary handle vertical installation EasyPact: fixed CVS100...160 without earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS250 without earth leakage protection - control: toggle vertical installation ComPact: fixed INV100 - control: direct front rotary handle vertical installation ComPact: fixed NSX100...160 without earth leakage protection - control: toggle vertical installation ComPact: fixed NSX250 without earth leakage protection - control: toggle vertical installation ComPact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle vertical installation ComPact: fixed NSX250 without earth leakage protection - control: direct front rotary handle vertical installation ComPact: fixed INV250 - control: lateral handle vertical installation ComPact: fixed INS250 - control: lateral handle vertical installation ComPact: fixed INV200 - control: direct front rotary handle vertical installation ComPact: fixed INV160 - control: direct front rotary handle vertical installation
[Ie] nominell driftsstrøm	250 A
Vekt	1,82 kg

[illegible]

Offer Sustainability

REACH-regelverk	 REACH-erklæring
REACH fri for SVHC	Ja
EU RoHS-direktiv	Proaktivt i samsvar (Produktet inngår ikke i EUs RoHS direktivet)  EU RoHS-erklæring
Fri for giftige tungmetaller	Ja
Kvikksølvfri	Ja
Informasjon om RoHS-unntak	 Ja
Kinas RoHS-forskrift	 Kinas RoHS-Erklæring