


LVS03487

MOUNTING PLATE FOR NS FIXED -3P/4P 1600A VERTICAL IN WIDTH 400

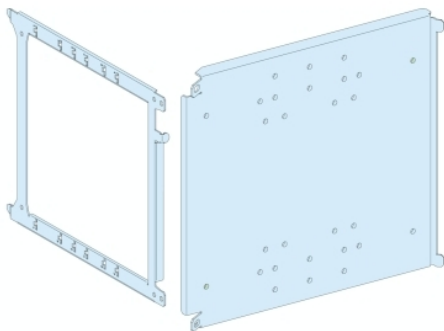

Teknisk informasjon

Serie	PrismaSeT
Produktspekter	PrismaSeT P
Produkt eller type komponent	Montasjeplate
Tilbehør / separat del kategori	Installasjonstilbehør
Kompatibel med	PrismaSeT P cubicle
Skap/kapsling beskrivelse	Cubicle - width 400 mm depth 400 mm

Installert utstyr	ComPact: fixed NSX400 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX400 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX400 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: fixed NSX630 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX400 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX400 without earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX400 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX400 without earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX630 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 without earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX630 without earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX630 without earth leakage protection - control: motor mechanism - vertical installation ComPact: plug-in NSX400 with earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX630 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NS1250 - control: toggle - vertical installation ComPact: fixed NS1250 - control: direct front rotary handle - vertical installation ComPact: fixed NS1250 - control: motor mechanism - vertical installation ComPact: fixed NS1600 - control: toggle - vertical installation ComPact: fixed NS1600 - control: direct front rotary handle - vertical installation ComPact: fixed NS1600 - control: motor mechanism - vertical installation ComPact: fixed NS630b...1000 - control: toggle - vertical installation ComPact: fixed NS630b...1000 - control: direct front rotary handle - vertical installation ComPact: fixed NS630b...1000 - control: motor mechanism - vertical installation
Polene beskrivelse	1 x 3P: fixed NSX400 vertical installation 1 x 4P: fixed NSX400 vertical installation 1 x 3P: fixed NSX630 vertical installation 1 x 4P: fixed NSX630 vertical installation 1 x 3P: plug-in NSX400 vertical installation 1 x 4P: plug-in NSX400 vertical installation 1 x 3P: plug-in NSX630 vertical installation 1 x 4P: plug-in NSX630 vertical installation 1 x 3P: fixed NS1250 vertical installation 1 x 4P: fixed NS1250 vertical installation 1 x 3P: fixed NS1600 vertical installation 1 x 4P: fixed NS1600 vertical installation 1 x 3P: fixed NS630b...1000 vertical installation 1 x 4P: fixed NS630b...1000 vertical installation

Antallet vertikale moduler (50 mm)	36 module(s): NS1250, direct in 400 mm Widecubicle 36 module(s): NS1600, direct in 400 mm Widecubicle 36 module(s): NS630b...1000, direct in 400 mm Widecubicle 12 module(s): NSX400 without earth leakage protection , front connection in 400 mm Widecubicle 12 module(s): NSX630 without earth leakage protection , front connection in 400 mm Widecubicle 14 module(s): NSX400 with earth leakage protection , front connection in 400 mm Widecubicle 14 module(s): NSX630 with earth leakage protection , front connection in 400 mm Widecubicle
Standarder	IEC 61439-2
Produktsertifikater	ASTA

Komplementær

Materiale	Sheet steel
Overflatebeskyttelse	Elektroforese behandling og hot-polymerisert polyester epoxy pulver
Type overflate	Matt Textured
Farge	Hvit (RAL 9003)
Bredde	400 mm
Høyde	300 mm

Vekt	2,7 kg
------	--------

[illegible]

Offer Sustainability

REACH-regelverk	REACH-erklæring
EU RoHS-direktiv	Proaktivt i samsvar (Produktet inngår ikke i EUs RoHS direktivet) EU RoHS-erklæring
Kvikksølvfri	Ja
Informasjon om RoHS-unntak	Ja
Kinas RoHS-forskrift	Kinas RoHS-Erklæring