


LVS03033

MOUNTING PLATE VIGI NSX/ CVS 250

HZ.FIXED TOGGLE

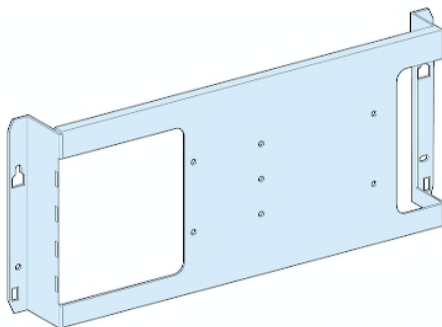

Teknisk informasjon

Serie	PrismaSeT
Produktspekter	PrismaSeT G
Produkt eller type komponent	Montasjeplate
Tilbehør / separat del kategori	Installasjonstilbehør
Kompatibel med	PrismaSeT G enclosure
Skap/kapsling beskrivelse	Floor-standing enclosure - width 850 mm Floor-standing enclosure + duct - width 600 + 300 mm Wall-mounted enclosure + duct - width 600 + 300 mm
Installert utstyr	Compact: fast NSX100...250 og amperemeter uten jordfeilbeskyttelse - kontroll: kipp - horisontal installasjon Easypact: fast CVS100...160 med jordfeilbeskyttelse - kontroll: kipp - horisontal installasjon Easypact: fast CVS250 med jordfeilbeskyttelse - kontroll: kipp - horisontal installasjon Compact: fast NSX100...160 med jordfeilbeskyttelse - kontroll: kipp - horisontal installasjon Compact: fast NSX250 med jordfeilbeskyttelse - kontroll: kipp - horisontal installasjon
Polene beskrivelse	1 x 3P: fixed CVS100...160 horizontal installation 1 x 4P: fixed CVS100...160 horizontal installation 1 x 3P: fixed CVS250 horizontal installation 1 x 4P: fixed CVS250 horizontal installation 1 x 3P: fixed NSX100...160 horizontal installation 1 x 4P: fixed NSX100...160 horizontal installation 1 x 3P: fixed NSX250 horizontal installation 1 x 4P: fixed NSX250 horizontal installation 1 x 3P: fixed NSX100...250 and ammeter horizontal installation 1 x 4P: fixed NSX100...250 and ammeter horizontal installation
Betingelse for bruken	Need additional plate (2M high) when installation of device is in horizontal

Informasjonen som gis i denne dokumentasjonen inneholder generelle beskrivelser og/eller tekniske egenskaper av ytelser til produktene i dokumentet. Denne dokumentasjonen er ikke ment som en erstatning for, og må ikke brukes til å bestemme egnethet eller påliteligheten til disse produktene for spesifikke brukerapplikasjoner. Enhver bruker eller integrator er ansvarlig for å utføre egnethet, analyse og testing av produktene med hensyn til aktuell bruk. Verken Schneider Electric Industries SAS eller noen av deres datterselskaper skal være ansvarlig for misbruk av informasjonen som finnes her.

Antallet vertikale moduler (50 mm)	4 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Widefloor-standing enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Widewall-mounted enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Widefloor-standing enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Widewall-mounted enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Widefloor-standing enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Widewall-mounted enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 850 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure) 4 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Widefloor-standing enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 600 + 300 mm Widewall-mounted enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 850 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure) 4 module(s): NSX100...250 and ammeter without earth leakage protection , direct with long terminal shield in 600 + 300 mm Widefloor-standing enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): NSX100...250 and ammeter without earth leakage protection , direct with long terminal shield in 600 + 300 mm Widewall-mounted enclosure + duct (cable coming from top or bottom of enclosure) 4 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 850 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure) 4 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 850 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure)
Standarder	IEC 61439-2
Produktsertifikater	ASTA

Komplementær

Materiale	Sheet steel
Overflatebeskyttelse	Elektroforese behandling og hot-polymerisert polyester epoxy pulver
Type overflate	Matt Textured
Farge	Hvit (RAL 9003)
Bredde	600 mm
Høyde	150 mm

Offer Sustainability

REACH-regelverk	REACH-erklæring
REACH fri for SVHC	Ja
EU RoHS-direktiv	Proaktivt i samsvar (Produktet inngår ikke i EUs RoHS direktivet) EU RoHS-erklæring
Fri for giftige tungmetaller	Ja
Kvikksølvfri	Ja
Informasjon om RoHS-unntak	Ja
Kinas RoHS-forskrift	Kinas RoHS-Erklæring