


LVS03043

MOUNTING PLATE NSX/INS-INV250

CHANGEOVER ROT.HAND

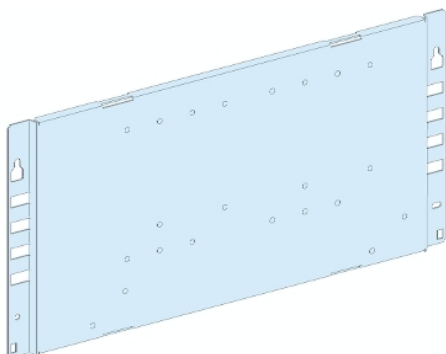

Teknisk informasjon

Serie	PrismaSeT
Produktspekter	PrismaSeT G
Produkt eller type komponent	Montasjeplate
Tilbehør / separat del kategori	Installasjonstilbehør
Kompatibel med	PrismaSeT G enclosure
Skap/kapsling beskrivelse	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm
Installert utstyr	ComPact: fixed INS250 source changeover - control: direct front rotary handle - vertical installation ComPact: fixed INS250 source changeover - control: mechanical interlock - vertical installation ComPact: fixed INV250 source changeover - control: mechanical interlock - vertical installation Source changeover: fixed NSX100...250 source changeover - control: mechanical interlock - vertical installation
Polene beskrivelse	1 x 3P: fixed INS250 source changeover vertical installation 1 x 4P: fixed INS250 source changeover vertical installation 1 x 3P: fixed INV250 source changeover vertical installation 1 x 4P: fixed INV250 source changeover vertical installation 1 x 3P: fixed NSX100...250 source changeover vertical installation 1 x 4P: fixed NSX100...250 source changeover vertical installation
Betingelse for bruken	Need additional plate (1M high) when installation of device is in vertical
Antallet vertikale moduler (50 mm)	10 module(s): INS250 source changeover, front connection in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure) 10 module(s): INS250 source changeover, front connection in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure) 10 module(s): INV250 source changeover, front connection in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure) 10 module(s): INV250 source changeover, front connection in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure) 11 module(s): NSX100...250 source changeover, front connection in 600 mm Widefloor-standing enclosure (cable coming from top or bottom of enclosure) 11 module(s): NSX100...250 source changeover, front connection in 600 mm Widewall-mounted enclosure (cable coming from top or bottom of enclosure)
Standarder	IEC 61439-2
Produktsertifikater	ASTA

Komplementær

Materiale	Sheet steel
Overflatebeskyttelse	Elektroforese behandling og hot-polymerisert polyester epoxy pulver
Type overflate	Matt Textured
Farge	Hvit (RAL 9003)
Bredde	600 mm
Høyde	200 mm
Vekt	1,37 kg
Skap/kapsling bredde	600 mm PrismaSeT G floor-standing enclosure ComPact INS250 source changeover fixed direct front rotary handle vertical 3P 1 front connection 10 0.37 mm 600 mm PrismaSeT G wall-mounted enclosure ComPact INS250 source changeover fixed direct front rotary handle vertical 3P 1 front connection 10 0.37 mm 600 mm PrismaSeT G floor-standing enclosure ComPact INS250 source changeover fixed direct front rotary handle vertical 4P 1 front connection 10 0.37 mm 600 mm PrismaSeT G wall-mounted enclosure ComPact INS250 source changeover fixed direct front rotary handle vertical 4P 1 front connection 10 0.37 mm 600 mm PrismaSeT G floor-standing enclosure ComPact INS250 source changeover fixed mechanical interlock vertical 3P 1 front connection 10 0.37 mm 600 mm PrismaSeT G wall-mounted enclosure ComPact INS250 source changeover fixed mechanical interlock vertical 3P 1 front connection 10 0.37 mm 600 mm PrismaSeT G floor-standing enclosure ComPact INS250 source changeover fixed mechanical interlock vertical 4P 1 front connection 10 0.37 mm 600 mm PrismaSeT G wall-mounted enclosure ComPact INS250 source changeover fixed mechanical interlock vertical 4P 1 front connection 10 0.37 mm 600 mm PrismaSeT G floor-standing enclosure ComPact INV250 source changeover fixed mechanical interlock vertical 3P 1 front connection 10 0.37 mm 600 mm PrismaSeT G wall-mounted enclosure ComPact INV250 source changeover fixed mechanical interlock vertical 3P 1 front connection 10 0.37 mm 600 mm PrismaSeT G floor-standing enclosure ComPact INV250 source changeover fixed mechanical interlock vertical 4P 1 front connection 10 0.37 mm 600 mm PrismaSeT G wall-mounted enclosure ComPact INV250 source changeover fixed mechanical interlock vertical 4P 1 front connection 10 0.37 mm 600 mm PrismaSeT G floor-standing enclosure source changeover NSX100...250 source changeover fixed mechanical interlock vertical 3P 1 front connection 11 0.37 mm 600 mm PrismaSeT G wall-mounted enclosure source changeover NSX100...250 source changeover fixed mechanical interlock vertical 3P 1 front connection 11 0.37 mm 600 mm PrismaSeT G floor-standing enclosure source changeover NSX100...250 source changeover fixed mechanical interlock vertical 4P 1 front connection 11 0.37 mm

Offer Sustainability

REACH-regelverk	 REACH-erklæring
REACH fri for SVHC	Ja
EU RoHS-direktiv	Proaktivt i samsvar (Produktet inngår ikke i EUs RoHS direktivet)  EU RoHS-erklæring
Fri for giftige tungmetaller	Ja
Kvikksølvfri	Ja
Informasjon om RoHS-unntak	 Ja
Kinas RoHS-forskrift	 Kinas RoHS-Erklæring