


LVS03073

MOUNTING PLATE NSX/CVS/VIGI/INS 630 V. FIX. TOGGLE

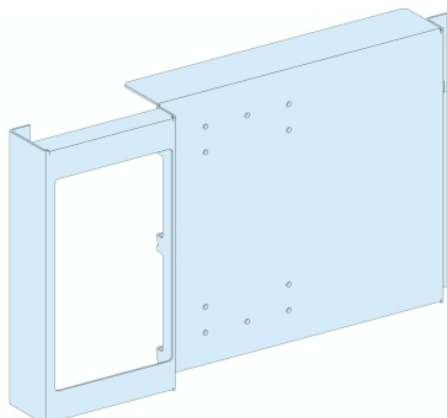

Teknisk informasjon

Serie	PrismaSeT
Produktspekter	PrismaSeT G
Produkt eller type komponent	Montasjeplate
Tilbehør / separat del kategori	Installasjonstilbehør
Kompatibel med	PrismaSeT G enclosure
Skap/kapsling beskrivelse	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm
Installert utstyr	EasyPact: fixed CVS400 without earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS630 without earth leakage protection - control: toggle - vertical installation EasyPact: fixed EZC400 - control: toggle - vertical installation EasyPact: fixed EZC630 - control: toggle - vertical installation ComPact: fixed INS320...400 - control: direct front rotary handle - vertical installation ComPact: fixed INS500...630 - control: direct front rotary handle - vertical installation ComPact: fixed INV320...400 - control: direct front rotary handle - vertical installation ComPact: fixed INV500...630 - control: direct front rotary handle - vertical installation ComPact: fixed NSX400 without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 without earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS400 with earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS630 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX400 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 with earth leakage protection - control: toggle - vertical installation
Polene beskrivelse	1 x 3P: fixed CVS400 vertical installation 1 x 4P: fixed CVS400 vertical installation 1 x 3P: fixed CVS630 vertical installation 1 x 4P: fixed CVS630 vertical installation 1 x 3P: fixed EZC400 vertical installation 1 x 4P: fixed EZC400 vertical installation 1 x 3P: fixed EZC630 vertical installation 1 x 4P: fixed EZC630 vertical installation 1 x 3P: fixed INS320...400 vertical installation 1 x 4P: fixed INS320...400 vertical installation 1 x 3P: fixed INS500...630 vertical installation 1 x 4P: fixed INS500...630 vertical installation 1 x 3P: fixed INV320...400 vertical installation 1 x 4P: fixed INV320...400 vertical installation 1 x 3P: fixed INV500...630 vertical installation 1 x 4P: fixed INV500...630 vertical installation 1 x 3P: fixed NSX400 vertical installation 1 x 4P: fixed NSX400 vertical installation 1 x 3P: fixed NSX630 vertical installation 1 x 4P: fixed NSX630 vertical installation
Betingelse for bruken	Need additional plate (1M high) when installation of device is in vertical

Informasjonen som gis i denne dokumentasjonen inneholder generelle beskrivelser og/eller tekniske egenskaper av ytelser til produktene i dokumentet. Denne dokumentasjonen er ikke ment som en erstatning for, og må ikke brukes til å bestemme egnethet eller påliteligheten til disse produktene for spesifikke brukerapplikasjoner. Enhver bruker eller integrator er ansvarlig for å utføre egnethet og fullstendig risikovurdering, analyse og testing av produktene med hensyn til aktuell bruk. Verken Schneider Electric Industries SAS eller noen av deres datterselskaper skal være ansvarlig for misbruk av informasjonen som finnes her.

Standarder	IEC 61439-2
Produktsertifikater	ASTA

Komplementær

Materiale	Sheet steel
Overflatebeskyttelse	Elektroforese behandling og hot-polymerisert polyester epoxy pulver
Type overflate	Textured Matt
Farge	Hvit (RAL 9003)
Bredde	600 mm
Høyde	300 mm

Vekt	2,64 kg
------	---------

Life Is On **Schneider**

Offer Sustainability

REACH-regelverk	 REACH-erklæring
REACH fri for SVHC	Ja
EU RoHS-direktiv	Proaktivt i samsvar (Produktet inngår ikke i EUs RoHS direktivet)  EU RoHS-erklæring
Fri for giftige tungmetaller	Ja
Kvikksølvfri	Ja
Informasjon om RoHS-unntak	 Ja
Kinas RoHS-forskrift	 Kinas RoHS-Erklæring