












IP66











230V  
50/60Hz



| WHITE LED | A[mm] | D[mm] | COLOUR LED | A[mm] | D[mm] |
|-----------|-------|-------|------------|-------|-------|
| 1.2ft     | 662   | 350   | 1.2ft      | 662   | 350   |
| 1.4ft     | 1272  | 700   | 1.4ft      | 1272  | 700   |
| 1.5ft     | 1572  | 940   | 1.5ft      | 1572  | 940   |

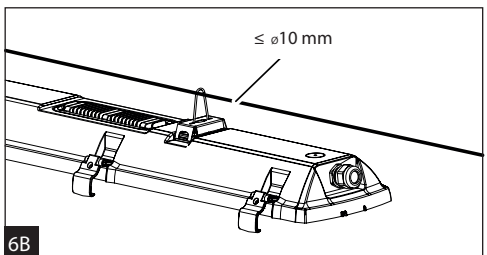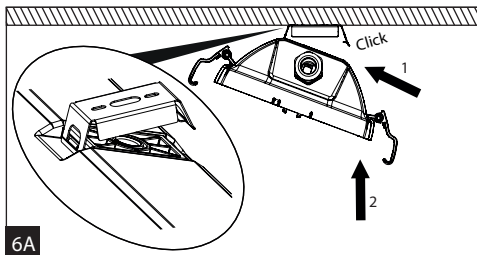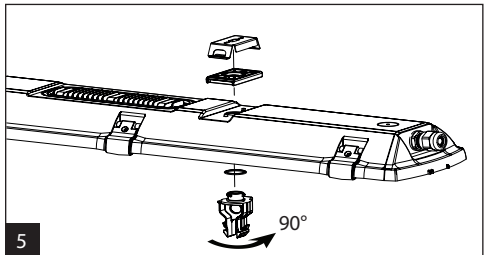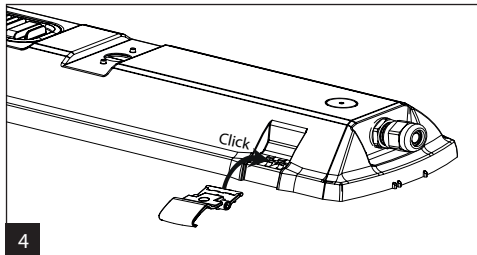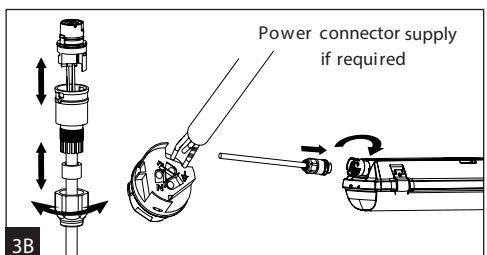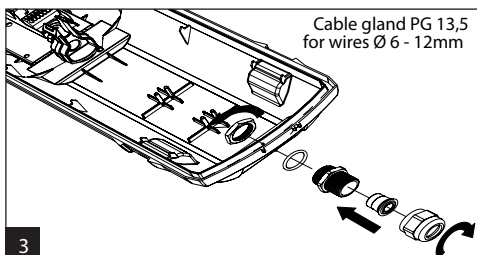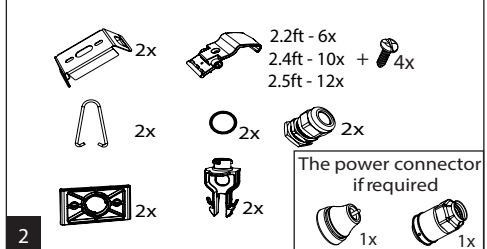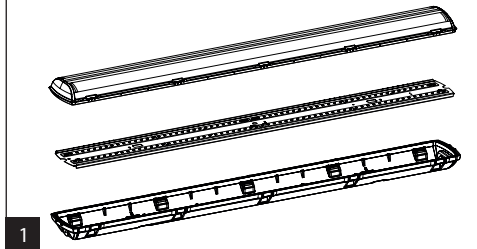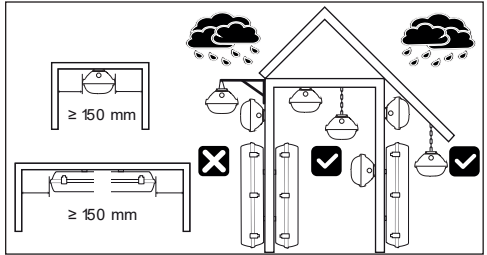

IP66

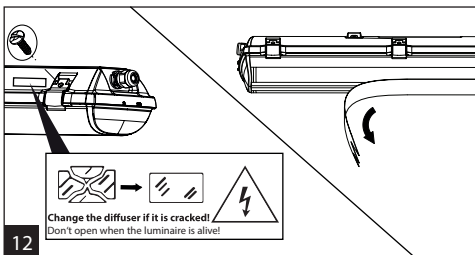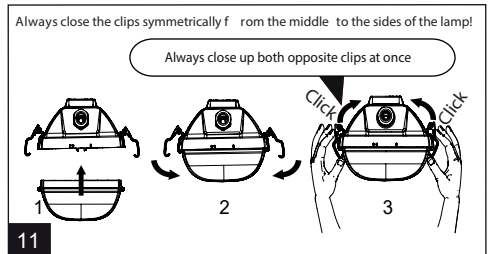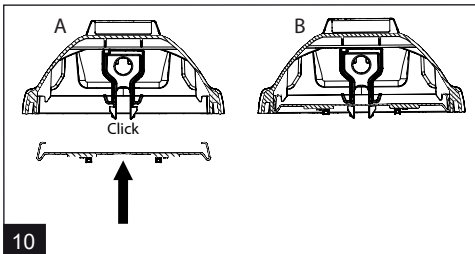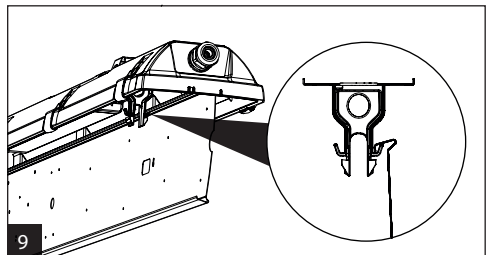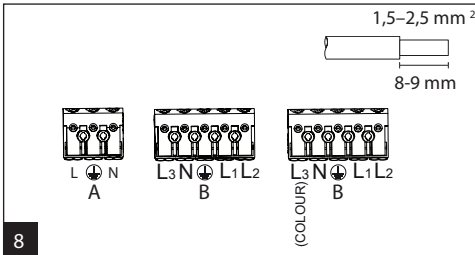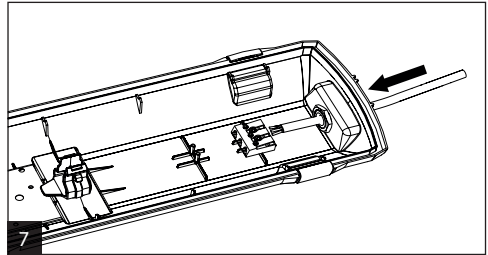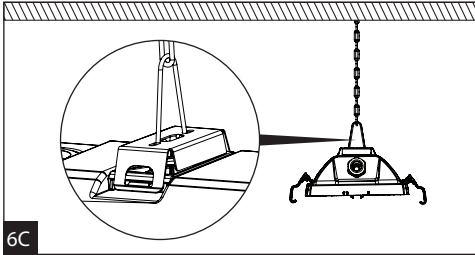230V  
50/60Hz

| Table of maximal number of luminaires in one line |       |      |       | 10A B<br>Σ | 16A B<br>Σ | 10A C<br>Σ | 16A C<br>Σ |
|---|-------|------|-------|------------|------------|------------|------------|
| Length  | Σ1m   | Σ1m  | Σ1m   | luminaires | luminaires | luminaires | luminaires |
| 2.2ft   | 2600  |      |       | 32         | 50         | 52         | 85         |
| 2.2ft   | 3200  | 4400 |       | 10         | 16         | 16         | 26         |
| 2.4ft   | 5200  | 6400 | 8800  | 10         | 16         | 16         | 26         |
| 2.4ft   | 12800 |      |       | 11         | 18         | 18         | 30         |
| 2.5ft   | 6500  | 8000 | 11000 | 10         | 16         | 16         | 26         |
| 2.5ft   | 16000 |      |       | 11         | 18         | 18         | 30         |

\* With a luminaire LED COLOUR, there must always be only one colour ON!



The light source in this luminaire may be replaced only by the manufacturer or its contractual service technician or similarly qualified person!

Installation can only be carried out by an authorized person and according to the mounting instructions. Any other installation is considered to be improper. For well installation and good luminaire work is necessary ensure a planarity of a mounting surface. Make sure that the luminaire is always disconnected from the power supply before the installation work. Do not use the luminaire if damaged or if damaged the power cable. Only damp microfiber cloth can be used for cleaning. Technical changes are subjected without notice. Do not dispose the luminaire or its parts as household waste, but make the proper recycling.