


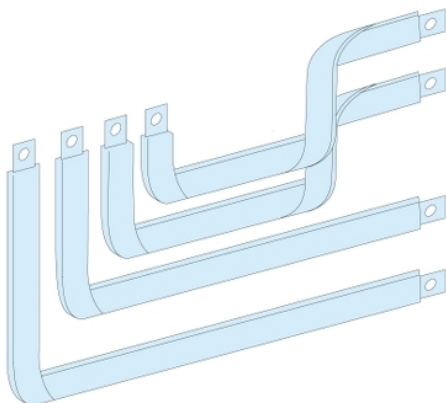

Teknisk informasjon

Serie	Linergy
Produktspekter	Linergy
Produkt eller type komponent	Forbindelse
Produktnavn	Linergy BW
Kompatibel med	PrismaSeT G enclosure PrismaSeT P enclosure Linergy BW busbar
Tilbehør / separat del kategori	Strømfordelingstilbehør
Standarder	IEC 61439-1, inside enclosure IEC 61439-2, inside enclosure
Produktsertifikater	ASTA

Komplementær

Skap - utstyrstilkobling	Universal power supply block
Antall poler	4P
Skap/kapsling beskrivelse	Cubicle duct - width 300 mm Floor-standing duct - width 300 mm Wall-mounted duct - width 300 mm
Installert utstyr	ComPact: fixed NSX400 without earth leakage protection - control: toggle vertical installation ComPact: fixed NSX400 without earth leakage protection - control: direct front rotary handle vertical installation ComPact: fixed NSX400 with earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS400 without earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS630 without earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS400 without earth leakage protection - control: direct front rotary handle vertical installation EasyPact: fixed CVS630 without earth leakage protection - control: direct front rotary handle vertical installation EasyPact: fixed CVS400 with earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS630 with earth leakage protection - control: toggle vertical installation ComPact: fixed NSX630 without earth leakage protection - control: toggle vertical installation ComPact: fixed NSX630 without earth leakage protection - control: direct front rotary handle vertical installation ComPact: fixed NSX630 with earth leakage protection - control: toggle vertical installation ComPact: fixed INS320...400 - control: direct front rotary handle vertical installation ComPact: fixed INS500...630 - control: direct front rotary handle vertical installation ComPact: fixed INV320...400 - control: direct front rotary handle vertical installation ComPact: fixed INV500...630 - control: direct front rotary handle vertical installation
[Ie] nominell driftsstrøm	630 A
Farge	Antrasitt grå (RAL 7016)
Vekt	5,1 kg

[illegible]

Offer Sustainability

REACH-regelverk	REACH-erklæring
REACH fri for SVHC	Ja
EU RoHS-direktiv	Proaktivt i samsvar (Produktet inngår ikke i EUs RoHS direktivet) EU RoHS-erklæring
Fri for giftige tungmetaller	Ja
Kvikksølvfri	Ja
Informasjon om RoHS-unntak	Ja
Kinas RoHS-forskrift	Kinas RoHS-Erklæring