


LVS04074

UNIVERSAL POWER SUPPLY BLOCK

400-630A

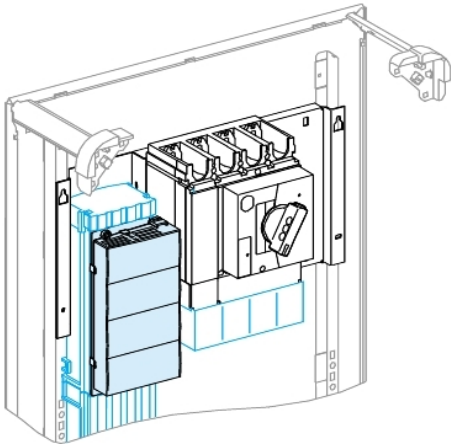

Teknisk informasjon

Serie	Linery
Produktspekter	Linery
Produkt eller type komponent	Universal power supply block
Produktnavn	Linery BW
Kompatibel med	PrismaSeT G enclosure PrismaSeT P enclosure Linery BW busbar
Tilbehør / separat del kategori	Strømfordelingstilbehør
Standarder	IEC 61439-1, inside enclosure IEC 61439-2, inside enclosure
Produktsertifikater	ASTA

Komplementær

Skap - utstyrstilkobling	Linergy BW busbar
Antall poler	3P 4P
Skap/kapsling beskrivelse	Floor-standing duct - width 300 mm Wall-mounted duct - width 300 mm Cubicle - width 650 mm Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm
Installert utstyr	ComPact: fixed NSX400 without earth leakage protection - control: toggle vertical installation ComPact: fixed NSX400 without earth leakage protection - control: direct front rotary handle vertical installation ComPact: fixed NSX400 with earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS400 without earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS630 without earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS400 without earth leakage protection - control: direct front rotary handle vertical installation EasyPact: fixed CVS630 without earth leakage protection - control: direct front rotary handle vertical installation EasyPact: fixed CVS400 with earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS630 with earth leakage protection - control: toggle vertical installation ComPact: fixed NSX630 without earth leakage protection - control: toggle vertical installation ComPact: fixed NSX630 without earth leakage protection - control: direct front rotary handle vertical installation ComPact: fixed NSX630 with earth leakage protection - control: toggle vertical installation ComPact: fixed NSX400 with earth leakage protection - control: direct front rotary handle vertical installation ComPact: fixed NSX630 with earth leakage protection - control: direct front rotary handle vertical installation ComPact: fixed INS320...400 - control: direct front rotary handle vertical installation ComPact: fixed INS500...630 - control: direct front rotary handle vertical installation ComPact: fixed INV320...400 - control: direct front rotary handle vertical installation ComPact: fixed INV500...630 - control: direct front rotary handle vertical installation EasyPact: fixed CVS400 with earth leakage protection - control: direct front rotary handle vertical installation EasyPact: fixed CVS630 with earth leakage protection - control: direct front rotary handle vertical installation
[I _e] nominell driftsstrøm	630 A
Vekt	1 kg

Antall pr. sett	Sett á 2
-----------------	----------

[illegible]

Offer Sustainability

REACH-regelverk	 REACH-erklæring
REACH fri for SVHC	Ja
EU RoHS-direktiv	Proaktivt i samsvar (Produktet inngår ikke i EUs RoHS direktivet)  EU RoHS-erklæring
Fri for giftige tungmetaller	Ja
Kvikksølvfri	Ja
Informasjon om RoHS-unntak	 Ja
Kinas RoHS-forskrift	 Kinas RoHS-Erklæring