


FDV DOKUMENT



Dense Pro 40W 1200mm Nøddlys 32 416 12 / 364189

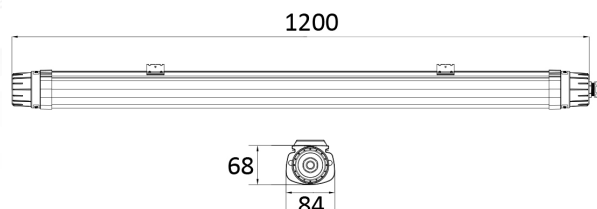


Art nr	El nr	Produktnavn	Å	Lysytelse	DIM	System eff	CRI	Lys farge	IP	Farge
364189	32 416 12	Dense Pro 40W 1200mm Nøddlys	120°	6400 lm		40W	>80	4000K	65	Hvit

Tekniske data:	36,9W (System effekt 40W)
Spennings:	200-240VAC 50/60Hz
LED Chip:	Runlite SMD 2835
Nøddlys ytelse:	4W
Nøddlys tid:	>3 timer
Lysytelse:	6400 lm
Lysytelse (Nøddlys):	480 lm (Nøddlys)
Lysfarge:	4000K
CRI/Ra:	>80
Strålingsvinkel:	120°
Utbyttbar LED:	Nei
Driftsstrøm:	350mA konstantstrøm
Dimming:	Ikke DIM
Sertifisert:	CE
Omgivelsestemp:	-20°C +40°C
Materiale:	Polykarbonat
Farge:	Matt hvit (RAL9003), Grå cap
IP Klasse:	IP65
IK Klasse:	IK08
Isolasjonsklasse:	Klasse I
Levetid	70 000 L80
Produktstørrelse	1200x84x68mm
Vekt	1,4 kgs
Antall per eske	1stk Dimensjon: 1353x93x75mm Vekt: 1,70 kgs
Antall per ytterkartong	6stk Dimensjon: 1370x95x175mm Vekt: 11,4 kgs

Resirkulering/WEEE:

Produktet er definert som miljøavfall og skal samles inn av et EE-returselskap. IPAS er medlem av Renas AS. Se mer på www.renas.no

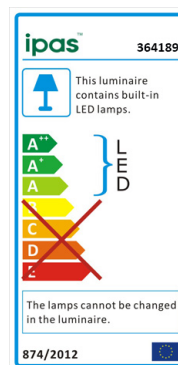

Rengjøring:

Planmessig rengjøring gir deg best belysning over tid.

Gjør anlegg alltid strømløst før rengjøring.

Det anbefales støvtørking med mikrofiber. Intervaller avhenger av bruksområdets støv-/smussmengde. Unngå sterke kjemikalier (pH>7) og vær varsom med frontlinse eller reflektor hvis denne er tilgjengelig. Ikke spray midler direkte på armatur. Særlig tilsmussede områder kan rengjøres med mildt såpevann, men prøv på et avgrenset område først. LED Driver eller åpne komponenter må ikke utsettes for vann eller fuktighet.

GARANTI: IPAS yter 5 års garanti. Se også ASLEM12 for mer informasjon.



IPAS AS




Østre Rosten 2A 7075 TILLER

www.ipas.no post@ipas.no Tlf 40 00 15 59.

V.24.09.2019



Dense Pro Emergency

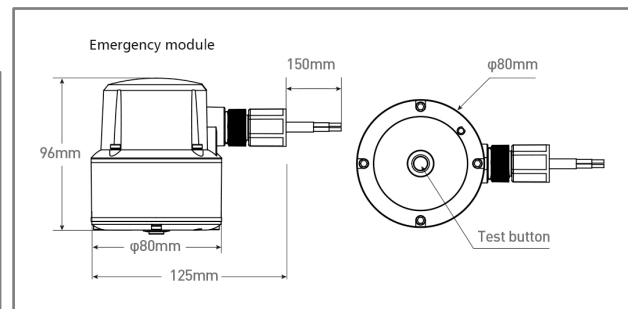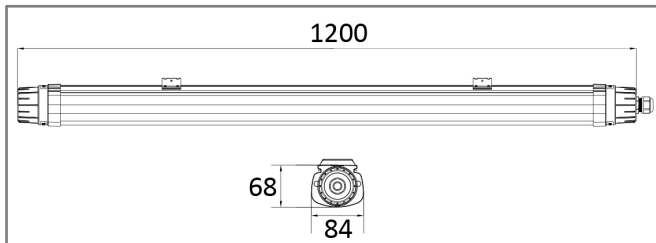

IMPORTANT INFORMATION:



1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. For indoor and outdoor use under shelter.

MAIN PARAMETER:

Product	364089	Power	Lumens	Emergency time
Rated Voltage	AC 220-240V 50/60Hz	(W)		
LED watt	36,9W	4	480	>3H
System eff	40W	Battery type		
LED	Runlite SMD 2835 LED	LiFePO4 6.4V/3AH		
LED Driver	Constant Current 350mA	Emergency Power		
Color Temperature	4000K	4W		
Protection	Class I	Charge Power		
Beam Angle	120°	3W		
IP Rated	IP65	Current capacity		
Operation Temperature	-20°C <ta<40°C	3000mAh		
Product Size	1200mmx84mmx68mm	Input voltage		
		AC220~240V 50~60Hz		
		Charge time		
		24H		
		Discharge time		
		>3H		
		Lifetime		
		500 times cycle		
		Operation temperature		
		0~40°C		
		Storage temperature		
		-10~60°C		

INSTALLATION INSTRUCTIONS:


1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.

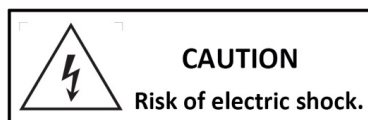

Art nr. 364189

INSTALLATION STEPS:


1. Select the required position for the luminaire. Ensure that it is securely located.

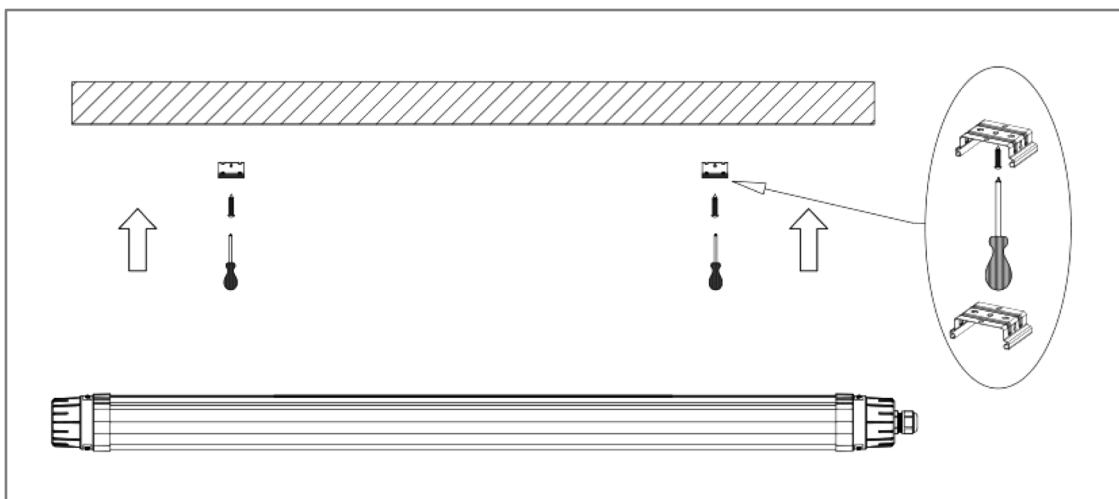

2. Twist the end cap and connect power supply to the quick release terminal.

- Mains supply LIVE (Brown) – L
- Mains supply NEUTRAL (Blue) – N
- Mains supply EARTH (Yellow/Green) - E

IMPORTANT: The luminaire is Class I and must be earthed.

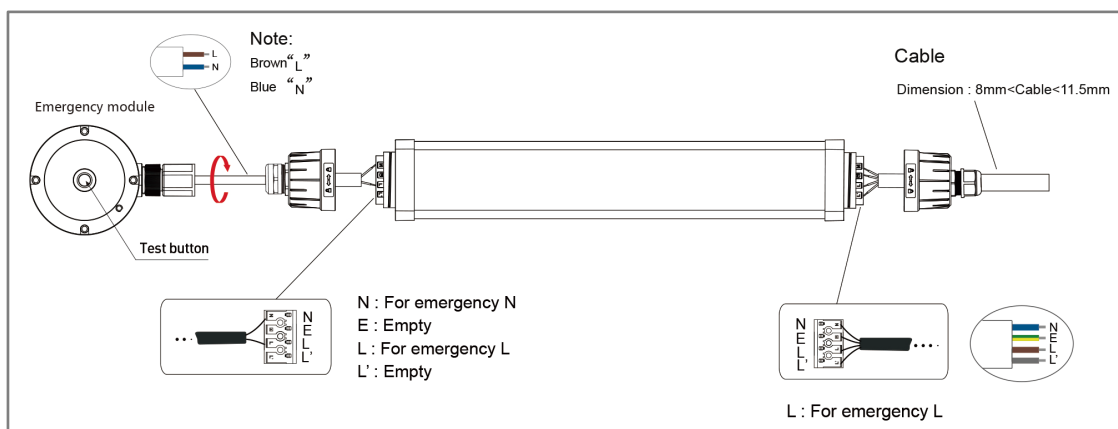

Input Voltage	Length (mm)	Max Qty	Size C (mm)
230VAC/40W	1200	16	optional

3. Switch on the power supply.