

FDV

LED Panel Profil Kit 60x60

El nr	33 225 03
Article nr	134004
EAN	7090015379218



Lysteknikk

Type lyskilde	LED (Epistar SMD LED)
Spenning	230VAC 50/60Hz
Watt	36W
Systemeffekt (W)	40W
Effektiv lysstrøm (lm)	3100 lm
Effekt	77,5lm/W
Fargetemperatur	3000K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM<4
Levetid	50000 L80
Lysspredning	120°

Dimmetype

Type	faseavsnitt
------	-------------

Beskyttelse


Isolasjonsklasse	Klasse II
IP-grad	IP40

Materialer og overflater

Armaturhus	Metallramme og bakplate
Farge	Matt hvit (RAL 9016)
Optikk	PS
LGP	2mm

Energi og godkjenning

Energiklasse	A
Godkjenning	CE
Safety standard	EN 60598-1:2015, EN 60598-2-2:2012, EN 62471:2008, EN 62493:2015

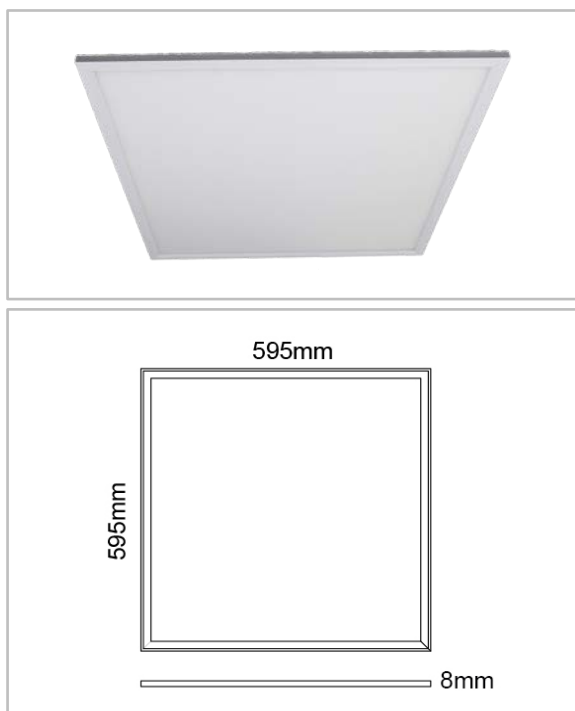

Montering/Tilkobling


Montering	Innfelling
Kabling	

Dimensjoner (mm)

Lengde (L)	595 mm
Bredde (W)	595 mm
Høyde (H)	8 mm
Vekt	2,50 kgs

Forpakning

Eske dimensjon	640x230x690 mm
Eske Vekt	3,20 kgs
Kartong Dimensjon	680x250x730 mm
Antall/Kartong	5 stk
Kartong Vekt	19 kgs

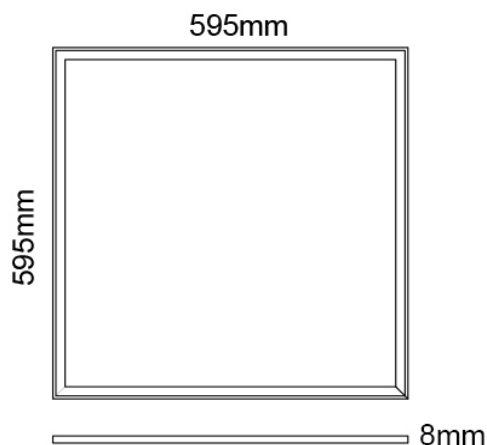

IMPORTANT INFORMATION:



1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. For indoor use only.

MAIN PARAMETER:

Product	134004
Rated voltage	AC 220-230V 50/60Hz
LED Rated power	36W
System power	40W
LED	SMD LED 4014
LED Driver	Constant Current 900mA
Color Temperature	3000K
Protection	CLASS II
Beam Angle	120°
Operation Temperature	-10°C ~ 45°C
Product size	595x595x8mm
Weight	2,5 kgs


INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.

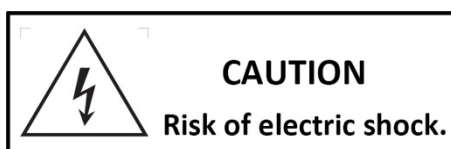


INSTALLATION STEPS:

1. Select the required position for the luminaire.
2. Connect Mains supply to the terminal block of LED driver. Connect the power cord from driver to the luminaire.

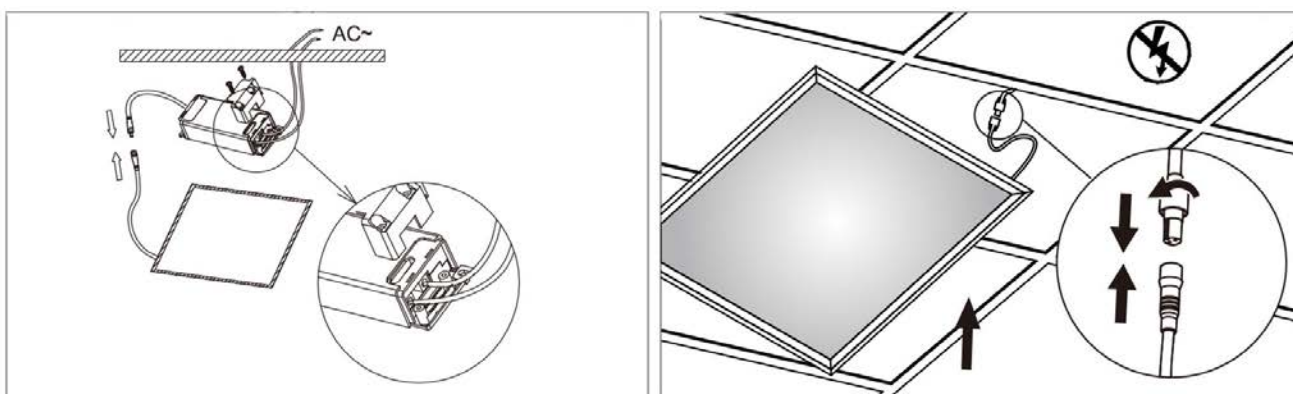

3. Push the luminaire up into ceiling. Ensure that it is securely located.

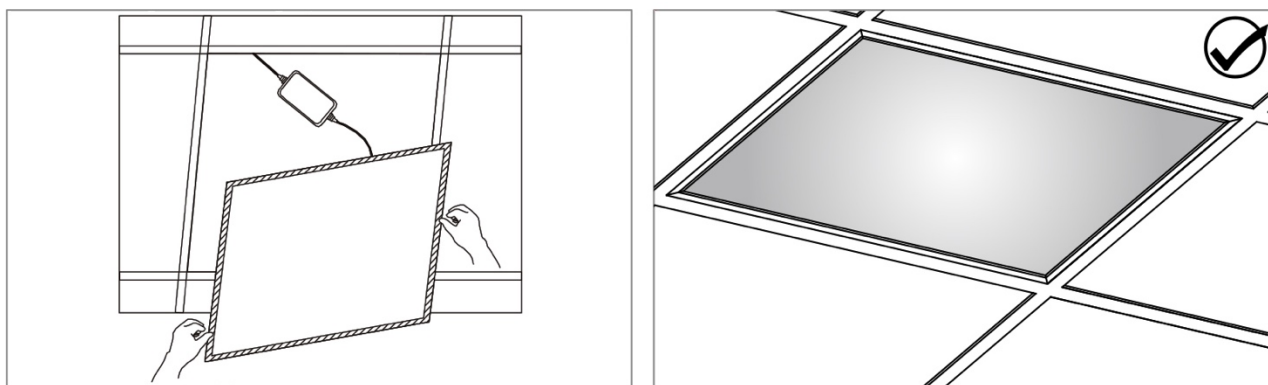

4. Switch on the power supply.

