

Art. 506N Enslavement Relay

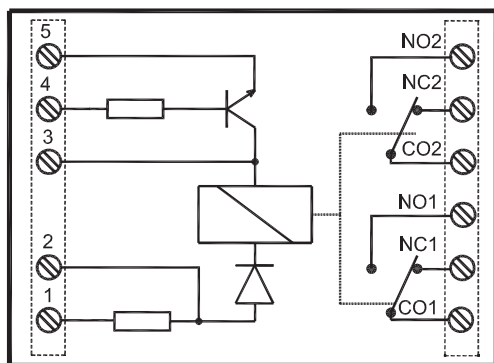


Fig. 1

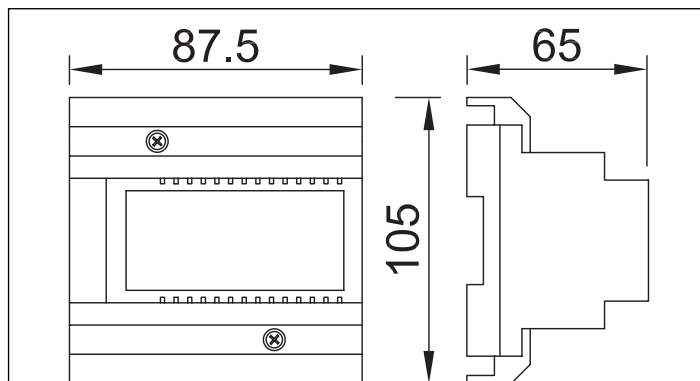


Fig. 2

DESCRIPTION

Enslavement Relay (230Vac 5A max) enables the control of stair lights or other power peripherals.

Normally used by the service push buttons.

In a standard 5 modules A type Din Box (87,50 mm), can be fixed to either a DIN bar or directly to the wall using two expansion type screws.

TERMINALS

1	20-24Vac/dc power Input	
2	12Vac/dc power Input	
3	Relay ground	
4	Relay positive command input	
5	Ground	
CO1	Common 1	Max 230Vac 5A 30Vdc 5A
NC1	Norm. closed 1	
NO1	Norm. open 1	
CO2	Common 2	
NC2	Norm. closed 2	
NO2	Norm. open 2	

TECHNICAL SPECIFICATION

Power Consumption: With 20-24Vac/Vdc

Standby: 0mA

Operating: 50mA

With 12Vac/dc

Standby: 0mA

Operating: 50mA

Working Temperature: -10°C +50°C

MANUFACTURER



made in
ITALY

VIDEX ELECTRONICS S.P.A.

Via del Lavoro, 1 - 63846 Monte Giberto (FM) Italy

Tel (+39) 0734 631669 - Fax (+39) 0734 632475

www.videx.it - info@videx.it

CUSTOMER SUPPORT

All Countries:

VIDEX ELECTRONICS S.P.A.

www.videx.it - technical@videx.it

Tel: +39 0734-631669

Fax: +39 0734-632475

UK Customers:

VIDEX SECURITY LTD

www.videx-security.com

Tech Line: 0191 224 3174

Fax: 0191 224 1559



The product is CE marked demonstrating its conformity and is for distribution within all member states of the EU with no restrictions. This product follows the provisions of the European Directives 2014/30/EU (EMC); 2014/35/EU (LVD); 2011/65/EU (RoHS); CE marking 93/68/EEC.

