



**NZM4 PXR25 circuit breaker - integrated energy measurement class 1, 800A, 4p, variable, Screw terminal, withdrawable unit**

**Part no. NZMN4-4-PX800/VAR-AVE**  
**Catalog No. 189662**


## Delivery program

|                                                                                     |                             |    |                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------------------------------------------------------------------------|-----------------------------|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product range                                                                       |                             |    | Circuit-breaker                                                                                                                                                                                                                                                                                                                                                                           |
| Protective function                                                                 |                             |    | Systems, cable, selectivity and generator protection                                                                                                                                                                                                                                                                                                                                      |
| Standard/Approval                                                                   |                             |    | IEC                                                                                                                                                                                                                                                                                                                                                                                       |
| Installation type                                                                   |                             |    | Withdrawable                                                                                                                                                                                                                                                                                                                                                                              |
| Release system                                                                      |                             |    | Electronic release                                                                                                                                                                                                                                                                                                                                                                        |
| Construction size                                                                   |                             |    | NZM4                                                                                                                                                                                                                                                                                                                                                                                      |
| Description                                                                         |                             |    | LSI overload protection and delayed and non-delayed short-circuit protective device<br>Class 1 energy measurement, r.m.s. value measurement, and "thermal memory"<br>USB interface for configuration and test function with Power Xpert Protection Manager software<br>Interface module in equipment supplied.<br>Optionally communication-capable with internal Modbus RTU module or CAM |
| Number of poles                                                                     |                             |    | 4 pole                                                                                                                                                                                                                                                                                                                                                                                    |
| Standard equipment                                                                  |                             |    | Screw connection                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Switching capacity</b>                                                           |                             |    |                                                                                                                                                                                                                                                                                                                                                                                           |
| 400/415 V 50 Hz                                                                     | $I_{cu}$                    | kA | 50                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Rated current = rated uninterrupted current</b>                                  |                             |    |                                                                                                                                                                                                                                                                                                                                                                                           |
| Rated current = rated uninterrupted current                                         | $I_n = I_u$                 | A  | 800                                                                                                                                                                                                                                                                                                                                                                                       |
| Neutral conductor                                                                   | % of phase conductor        | %  | 0 - 60 - 100                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Setting range</b>                                                                |                             |    |                                                                                                                                                                                                                                                                                                                                                                                           |
| Overload trip                                                                       |                             |    |                                                                                                                                                                                                                                                                                                                                                                                           |
|  | $I_r$                       | A  | 320 - 800                                                                                                                                                                                                                                                                                                                                                                                 |
| Short-circuit releases                                                              |                             |    |                                                                                                                                                                                                                                                                                                                                                                                           |
|  |                             |    |                                                                                                                                                                                                                                                                                                                                                                                           |
| Non-delayed                                                                         | $I_i = I_n \times \dots$    |    | 2 - 15                                                                                                                                                                                                                                                                                                                                                                                    |
|  |                             |    |                                                                                                                                                                                                                                                                                                                                                                                           |
| Delayed                                                                             | $I_{sd} = I_r \times \dots$ |    | 2 - 10                                                                                                                                                                                                                                                                                                                                                                                    |
|  |                             |    |                                                                                                                                                                                                                                                                                                                                                                                           |

## Technical data

### General

|                                                                                       |  |      |                                                                                |
|---------------------------------------------------------------------------------------|--|------|--------------------------------------------------------------------------------|
| Standards                                                                             |  |      | IEC/EN 60947                                                                   |
| Protection against direct contact                                                     |  |      | Finger and back of hand proof to VDE 0106 Part 100                             |
| Climatic proofing                                                                     |  |      | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature                                                                   |  |      |                                                                                |
| Ambient temperature, storage                                                          |  | °C   | - 40 - + 70                                                                    |
| Operation                                                                             |  | °C   | -25 - +70                                                                      |
| Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC 60068-2-27 |  | g    | 15 (half-sinusoidal shock 11 ms)                                               |
| Safe isolation to EN 61140                                                            |  |      |                                                                                |
| Between auxiliary contacts and main contacts                                          |  | V AC | 500                                                                            |

|                                        |  |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------------------|--|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| between the auxiliary contacts         |  | V AC | 300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Mounting position                      |  |      | Vertical and 90° in all directions<br> <p>With XFI earth-fault release:<br/>           - NZM1, N1, NZM2, N2: vertical and 90° in all directions<br/>           with plug-in unit<br/>           - NZM1, N1, NZM2, N2: vertical, 90° right/left<br/>           with withdrawable unit:<br/>           - NZM3, N3: vertical, 90° right/left<br/>           - NZM4, N4: vertical<br/>           with remote operator:<br/>           - NZM2, N(S)2, NZM3, N(S)3, NZM4, N(S)4: vertical and 90° in all directions</p> |
| Direction of incoming supply           |  |      | as required                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Degree of protection                   |  |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Device                                 |  |      | In the operating controls area: IP20 (basic degree of protection)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Enclosures                             |  |      | With insulating surround: IP40<br>With door coupling rotary handle: IP66                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Terminations                           |  |      | Tunnel terminal: IP10<br>Phase isolator and strip terminal: IP00                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Other technical data (sheet catalogue) |  |      | Weight<br>Temperature dependency, Derating<br>Effective power loss                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## Circuit-breakers

|                                             |             |      |       |
|---------------------------------------------|-------------|------|-------|
| Rated current = rated uninterrupted current | $I_n = I_u$ | A    | 800   |
| Rated surge voltage invariability           | $U_{imp}$   |      |       |
| Main contacts                               |             | V    | 8000  |
| Auxiliary contacts                          |             | V    | 6000  |
| Rated operational voltage                   | $U_e$       | V AC | 690   |
| Overvoltage category/pollution degree       |             |      | III/3 |
| Rated insulation voltage                    | $U_i$       | V    | 1000  |
| Use in unearthed supply systems             |             | V    | ≤ 525 |

## Switching capacity

|                                                                             |            |    |                                                                                                                                                 |
|-----------------------------------------------------------------------------|------------|----|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated short-circuit making capacity                                         | $I_{cm}$   |    |                                                                                                                                                 |
| 240 V                                                                       | $I_{cm}$   | kA | 105                                                                                                                                             |
| 400/415 V                                                                   | $I_{cm}$   | kA | 105                                                                                                                                             |
| 440 V 50/60 Hz                                                              | $I_{cm}$   | kA | 74                                                                                                                                              |
| 525 V 50/60 Hz                                                              | $I_{cm}$   | kA | 53                                                                                                                                              |
| 690 V 50/60 H                                                               | $I_c$      | kA | 40                                                                                                                                              |
| Rated short-circuit breaking capacity $I_{cn}$                              | $I_{cn}$   |    |                                                                                                                                                 |
| $I_{cu}$ to IEC/EN 60947 test cycle O-t-CO                                  | $I_{cu}$   | kA |                                                                                                                                                 |
| 240 V 50/60 Hz                                                              | $I_{cu}$   | kA | 50                                                                                                                                              |
| 400/415 V 50/60 Hz                                                          | $I_{cu}$   | kA | 50                                                                                                                                              |
| 440 V 50/60 Hz                                                              | $I_{cu}$   | kA | 35                                                                                                                                              |
| 525 V 50/60 Hz                                                              | $I_{cu}$   | kA | 25                                                                                                                                              |
| 690 V 50/60 Hz                                                              | $I_{cu}$   | kA | 20                                                                                                                                              |
| $I_{cs}$ to IEC/EN 60947 test cycle O-t-CO-t-CO                             | $I_{cs}$   | kA |                                                                                                                                                 |
| 240 V 50/60 Hz                                                              | $I_{cs}$   | kA | 37                                                                                                                                              |
| 400/415 V 50/60 Hz                                                          | $I_{cs}$   | kA | 37                                                                                                                                              |
| 440 V 50/60 Hz                                                              | $I_{cs}$   | kA | 26                                                                                                                                              |
| 525 V 50/60 Hz                                                              | $I_{cs}$   | kA | 19                                                                                                                                              |
| 690 V 50/60 Hz                                                              | $I_{cs}$   | kA | 15                                                                                                                                              |
|                                                                             |            |    | Maximum back-up fuse, if the expected short-circuit currents at the installation location exceed the switching capacity of the circuit-breaker. |
| Rated short-time withstand current                                          |            |    |                                                                                                                                                 |
| t = 0.3 s                                                                   | $I_{cw}$   | kA | 12                                                                                                                                              |
| t = 1 s                                                                     | $I_{cw}$   | kA | 12                                                                                                                                              |
| Utilization category to IEC/EN 60947-2                                      |            |    | B                                                                                                                                               |
| Lifespan, mechanical(of which max. 50 % trip by shunt/undervoltage release) | Operations |    | 10000                                                                                                                                           |

|                                   |            |       |                            |
|-----------------------------------|------------|-------|----------------------------|
| Lifespan, electrical              |            |       |                            |
| AC-1                              |            |       |                            |
| 400 V 50/60 Hz                    | Operations |       | 3000                       |
| 415 V 50/60 Hz                    | Operations |       | 3000                       |
| 690 V 50/60 Hz                    | Operations |       | 2000                       |
| Max. operating frequency          |            | Ops/h | 60                         |
| Total break time at short-circuit |            | ms    | < 25 ≤ 415 V; < 35 > 415 V |

## Terminal capacity

|                                                           |      |                 |                                                      |
|-----------------------------------------------------------|------|-----------------|------------------------------------------------------|
| Standard equipment                                        |      |                 | Screw connection                                     |
| Accessories required                                      |      |                 | NZM4-4-XAVS                                          |
| Optional accessories                                      |      |                 | Tunnel terminal connection on rear<br>Strip terminal |
| Round copper conductor                                    |      |                 |                                                      |
| Tunnel terminal                                           |      |                 |                                                      |
| Stranded                                                  |      |                 |                                                      |
| 4-hole                                                    |      | mm <sup>2</sup> | 4 x (50 - 240)                                       |
| Bolt terminal and rear-side connection                    |      |                 |                                                      |
| Direct on the switch                                      |      |                 |                                                      |
| Stranded                                                  |      | mm <sup>2</sup> | 1 x (120 - 185)<br>4 x (50 - 185)                    |
| Module plate                                              |      |                 |                                                      |
| Single hole                                               | min. | mm <sup>2</sup> | 1 x (120 - 300)                                      |
| Single hole                                               | max. | mm <sup>2</sup> | 2 x (95 - 300)                                       |
| Module plate                                              |      |                 |                                                      |
| Double hole                                               | min. | mm <sup>2</sup> | 2 x (95 - 185)                                       |
| Double hole                                               | max. | mm <sup>2</sup> | 4 x (35 - 185)                                       |
| Connection width extension                                |      | mm <sup>2</sup> |                                                      |
| Connection width extension                                |      | mm <sup>2</sup> | 4 x 300<br>6 x (95 - 240)                            |
| Al circular conductor                                     |      |                 |                                                      |
| Tunnel terminal                                           |      |                 |                                                      |
| Stranded                                                  |      |                 |                                                      |
| 4-hole                                                    |      | mm <sup>2</sup> | 4 x (50 - 240)                                       |
| Cu strip (number of segments x width x segment thickness) |      |                 |                                                      |
| Flat conductor terminal                                   |      |                 |                                                      |
|                                                           | min. | mm              | 6 x 16 x 0.8                                         |
|                                                           | max. | mm              | (2 x) 10 x 32 x 1.0                                  |
| Module plate                                              |      |                 |                                                      |
| Single hole                                               |      | mm              | (2 x) 10 x 50 x 1.0                                  |
| Bolt terminal and rear-side connection                    |      |                 |                                                      |
| Flat copper strip, with holes                             | min. | mm              | 5 x 25 x 1.0                                         |
| Flat copper strip, with holes                             | max. | mm              | (2 x) 10 x 50 x 1.0                                  |
| Connection width extension                                |      | mm              | (2 x) 10 x 80 x 1.0                                  |
| Copper busbar (width x thickness)                         | mm   |                 |                                                      |
| Bolt terminal and rear-side connection                    |      |                 |                                                      |
| Screw connection                                          |      |                 | M10                                                  |
| Direct on the switch                                      |      |                 |                                                      |
|                                                           | min. | mm              | 25 x 5                                               |
|                                                           | max. | mm              | 2 x (50 x 10)                                        |
| Module plate                                              |      |                 |                                                      |
| Single hole                                               | min. | mm              | 25 x 5                                               |
| Single hole                                               | max. | mm              | 2 x (50 x 10)                                        |
| Module plate                                              |      |                 |                                                      |
| Double hole                                               |      | mm              | 2 x (50 x 10)                                        |
| Connection width extension                                |      | mm              |                                                      |

|                            |      |                 |                                      |
|----------------------------|------|-----------------|--------------------------------------|
| Connection width extension | min. | mm              | 60 x 10                              |
| Connection width extension | max. | mm              | 2 x (80 x 10)                        |
| Control cables             |      |                 |                                      |
|                            |      | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 1.5) |

## Design verification as per IEC/EN 61439


|                                                                                                                        |                  |    |                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------|------------------|----|----------------------------------------------------------------------------------------------------------------------------------|
| Technical data for design verification                                                                                 |                  |    |                                                                                                                                  |
| Rated operational current for specified heat dissipation                                                               | I <sub>n</sub>   | A  | 800                                                                                                                              |
| Equipment heat dissipation, current-dependent                                                                          | P <sub>vid</sub> | W  | 106                                                                                                                              |
| Operating ambient temperature min.                                                                                     |                  | °C | -25                                                                                                                              |
| Operating ambient temperature max.                                                                                     |                  | °C | 70                                                                                                                               |
| IEC/EN 61439 design verification                                                                                       |                  |    |                                                                                                                                  |
| 10.2 Strength of materials and parts                                                                                   |                  |    |                                                                                                                                  |
| 10.2.2 Corrosion resistance                                                                                            |                  |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.1 Verification of thermal stability of enclosures                                                               |                  |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat                                             |                  |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                  |    | Meets the product standard's requirements.                                                                                       |
| 10.2.4 Resistance to ultra-violet (UV) radiation                                                                       |                  |    | Meets the product standard's requirements.                                                                                       |
| 10.2.5 Lifting                                                                                                         |                  |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.6 Mechanical impact                                                                                               |                  |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.7 Inscriptions                                                                                                    |                  |    | Meets the product standard's requirements.                                                                                       |
| 10.3 Degree of protection of ASSEMBLIES                                                                                |                  |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.4 Clearances and creepage distances                                                                                 |                  |    | Meets the product standard's requirements.                                                                                       |
| 10.5 Protection against electric shock                                                                                 |                  |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.6 Incorporation of switching devices and components                                                                 |                  |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.7 Internal electrical circuits and connections                                                                      |                  |    | Is the panel builder's responsibility.                                                                                           |
| 10.8 Connections for external conductors                                                                               |                  |    | Is the panel builder's responsibility.                                                                                           |
| 10.9 Insulation properties                                                                                             |                  |    |                                                                                                                                  |
| 10.9.2 Power-frequency electric strength                                                                               |                  |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.3 Impulse withstand voltage                                                                                       |                  |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.4 Testing of enclosures made of insulating material                                                               |                  |    | Is the panel builder's responsibility.                                                                                           |
| 10.10 Temperature rise                                                                                                 |                  |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                                                                                             |                  |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                                                                                    |                  |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                                                                              |                  |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |


## Technical data ETIM 8.0

|                                                                                                                                                                                                                                             |  |    |                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----|---------------------------------------------------|
| Low-voltage industrial components (EG000017) / Power circuit-breaker for trafo/generator/installation protection (EC000228)                                                                                                                 |  |    |                                                   |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Circuit breaker for power transformer, generator and system protection (ecl@ss10.0.1-27-37-04-09 [AJZ716013]) |  |    |                                                   |
| Rated permanent current I <sub>u</sub>                                                                                                                                                                                                      |  | A  | 800                                               |
| Rated voltage                                                                                                                                                                                                                               |  | V  | 690 - 690                                         |
| Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, 50 Hz                                                                                                                                                                       |  | kA | 37                                                |
| Overload release current setting                                                                                                                                                                                                            |  | A  | 320 - 800                                         |
| Adjustment range short-term delayed short-circuit release                                                                                                                                                                                   |  | A  | 2 - 10                                            |
| Adjustment range undelayed short-circuit release                                                                                                                                                                                            |  | A  | 2 - 18                                            |
| Integrated earth fault protection                                                                                                                                                                                                           |  |    | No                                                |
| Type of electrical connection of main circuit                                                                                                                                                                                               |  |    | Other                                             |
| Device construction                                                                                                                                                                                                                         |  |    | Built-in device slide-in technique (withdrawable) |
| Suitable for DIN rail (top hat rail) mounting                                                                                                                                                                                               |  |    | No                                                |
| DIN rail (top hat rail) mounting optional                                                                                                                                                                                                   |  |    | No                                                |
| Number of auxiliary contacts as normally closed contact                                                                                                                                                                                     |  |    | 0                                                 |

|                                                       |  |                                     |
|-------------------------------------------------------|--|-------------------------------------|
| Number of auxiliary contacts as normally open contact |  | 0                                   |
| Number of auxiliary contacts as change-over contact   |  | 0                                   |
| With switched-off indicator                           |  | No                                  |
| With integrated under voltage release                 |  | No                                  |
| Number of poles                                       |  | 4                                   |
| Position of connection for main current circuit       |  | Connection at separate chassis part |
| Type of control element                               |  | Rocker lever                        |
| Complete device with protection unit                  |  | Yes                                 |
| Motor drive integrated                                |  | No                                  |
| Motor drive optional                                  |  | Yes                                 |
| Degree of protection (IP)                             |  | IP20                                |

Dimensions

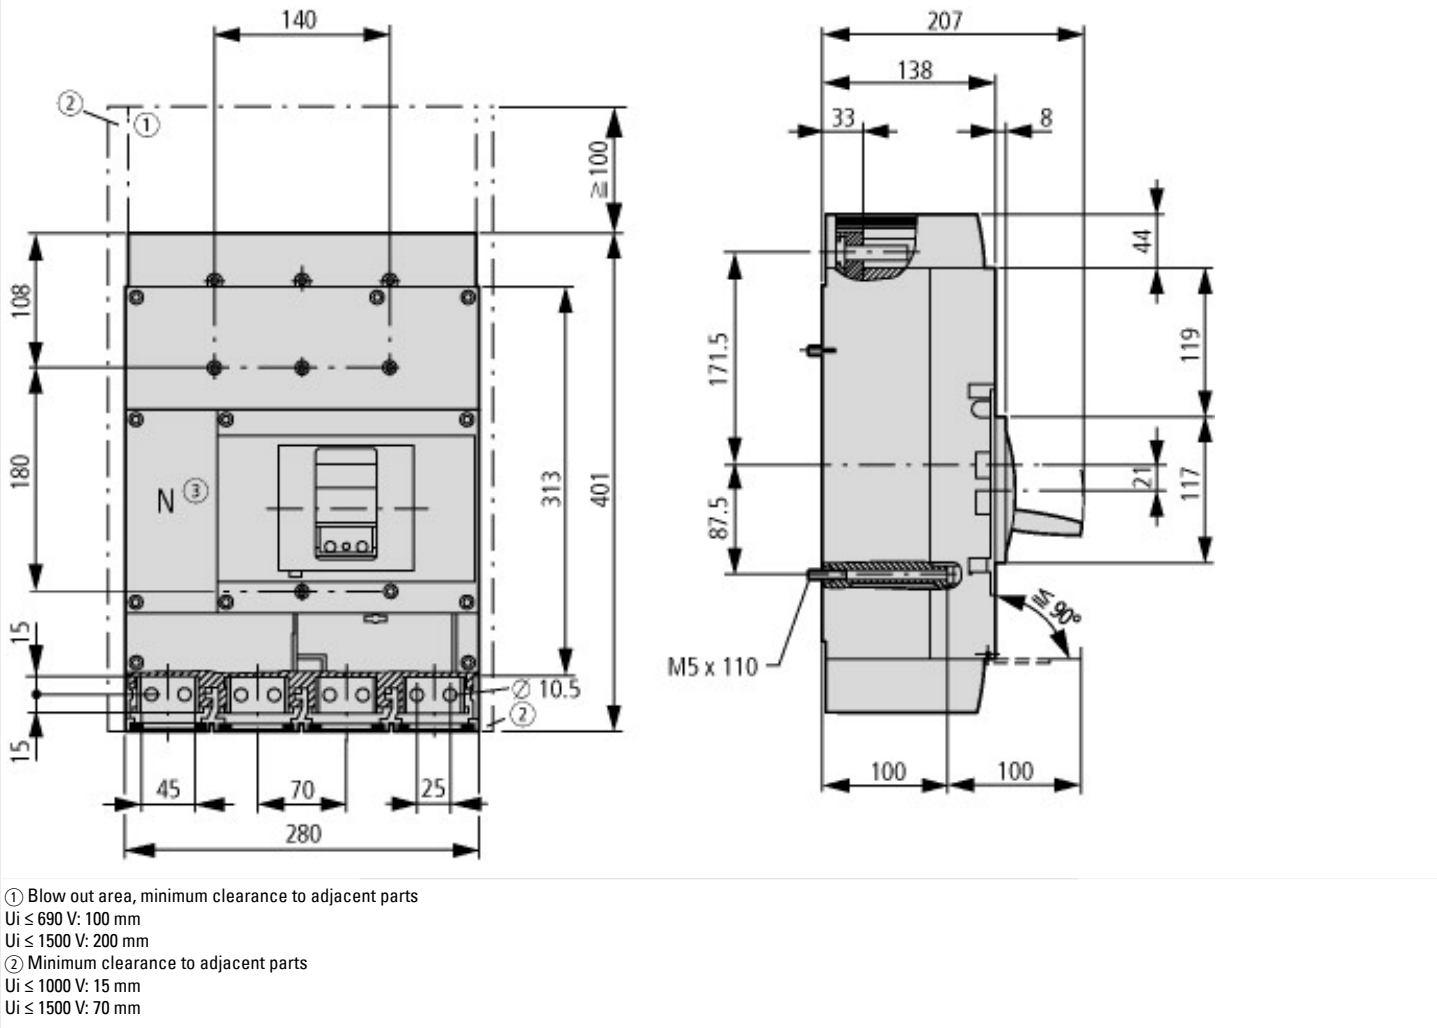

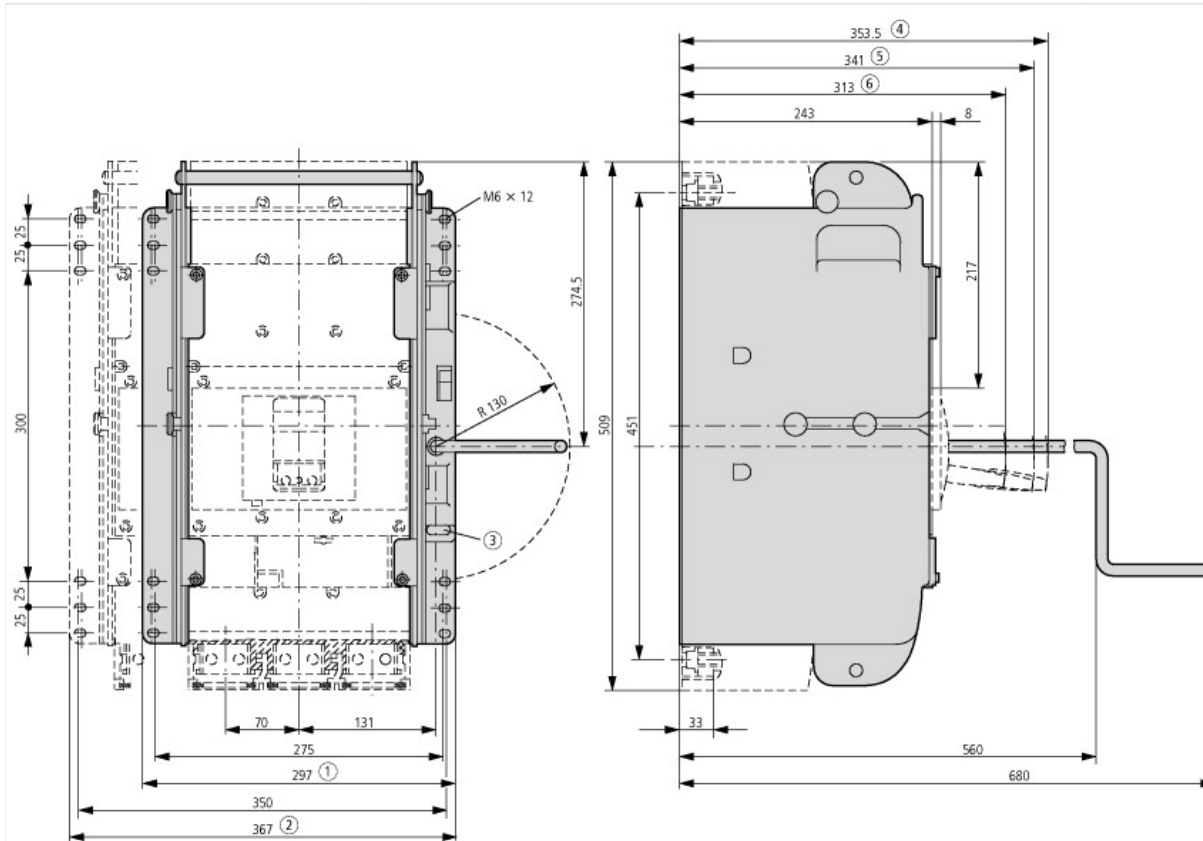

## Additional product information (links)

### IL012101ZU NZM4-PXR circuit-breaker, basic device, NZM4-PXR Circuit-Breaker, basic unit

|                                                                                         |                                                                                                                                                                                 |
|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IL012101ZU NZM4-PXR circuit-breaker, basic device, NZM4-PXR Circuit-Breaker, basic unit | <a href="https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL012101ZU2022_01.pdf">https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL012101ZU2022_01.pdf</a> |
| Weight                                                                                  | <a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.171">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.171</a>                         |
| Temperature dependency, Derating                                                        | <a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.172">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.172</a>                         |
| Effective power loss                                                                    | <a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.174">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.174</a>                         |
| additional technical information for NZM power switch                                   | <a href="https://es-assets.eaton.com/DOCUMENTATION/PDF/nzm_technik_de_en.pdf">https://es-assets.eaton.com/DOCUMENTATION/PDF/nzm_technik_de_en.pdf</a>                           |