


**NZM4 PXR25 circuit breaker - integrated energy measurement class 1, 1400A, 3p, Screw terminal**

**Part no.** **NZMN4-PMX1400**  
**Catalog No.** **189683**

Similar to illustration

## Delivery program


Product range	Circuit-breaker				
Protective function	Motor protection				
Standard/Approval	IEC				
Installation type	Fixed				
Release system	Electronic release				
Construction size	NZM4				
Description	Motor protection - overload- and short-circuit protective device LI Motor Class 1 energy measurement, phase loss protection, r.m.s. value measurement, and "thermal memory" USB interface for configuration and test function with Power Xpert Protection Manager software Interface module in equipment supplied. Optionally communication-capable with interface module and internal Modbus RTU module or CAM				
Number of poles	3 pole				
Standard equipment	Screw connection				
Rated current = rated uninterrupted current	$I_n = I_u$	A	1400		
<b>Setting range</b>					
Overload trip					
	$I_r$	A	700 - 1400		
Short-circuit releases					
					
Non-delayed	$I_j = I_n \times \dots$	2 - 14			
					
<b>Motor rating AC-3 50/60 Hz</b>					
380 V 400 V	P	kW	800		
<b>Motor rating AC-3 50/60 Hz</b>					
400 V	P	kW	800		

## Technical data

General			
Standards	IEC/EN 60947		
Protection against direct contact	Finger and back of hand proof to VDE 0106 Part 100		
Climatic proofing	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30		
Ambient temperature			
Ambient temperature, storage	$^{\circ}\text{C}$	- 40 - + 70	
Operation	$^{\circ}\text{C}$	- 25 - + 70	
Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC 60068-2-27	g	15 (half-sinusoidal shock 11 ms)	
Safe isolation to EN 61140			
Between auxiliary contacts and main contacts	V AC	500	
between the auxiliary contacts	V AC	300	

## Mounting position

Vertical and 90° in all directions



With XFI earth-fault release:  
 - NZM1, N1, NZM2, N2: vertical and 90° in all directions with plug-in unit  
 - NZM1, N1, NZM2, N2: vertical, 90° right/left with withdrawable unit:  
 - NZM3, N3: vertical, 90° right/left  
 - NZM4, N4: vertical with remote operator:  
 - NZM2, N(S)2, NZM3, N(S)3, NZM4, N(S)4: vertical and 90° in all directions

## Direction of incoming supply

as required

## Degree of protection

Device

In the operating controls area: IP20 (basic degree of protection)

Enclosures

With insulating surround: IP40

With door coupling rotary handle: IP66

Terminations

Tunnel terminal: IP10

Phase isolator and strip terminal: IP00

## Other technical data (sheet catalogue)

Weight

Temperature dependency, Derating

Effective power loss

## Circuit-breakers

Rated current = rated uninterrupted current	$I_n = I_u$	A	1400
Rated surge voltage invariability	$U_{imp}$		
Main contacts		V	8000
Auxiliary contacts		V	6000
Rated operational voltage	$U_e$	V AC	690
Overvoltage category/pollution degree			III/3
Rated insulation voltage	$U_i$	V	690
Use in unearthing supply systems		V	$\leq 525$

## Switching capacity

Rated short-circuit making capacity	$I_{cm}$		
240 V	$I_{cm}$	kA	105
400/415 V	$I_{cm}$	kA	105
440 V 50/60 Hz	$I_{cm}$	kA	74
525 V 50/60 Hz	$I_{cm}$	kA	53
690 V 50/60 Hz	$I_c$	kA	40
Rated short-circuit breaking capacity $I_{cn}$	$I_{cn}$		
$I_{cu}$ to IEC/EN 60947 test cycle 0-t-C0	$I_{cu}$	kA	
690 V 50/60 Hz	$I_{cu}$	kA	20
$I_{cs}$ to IEC/EN 60947 test cycle 0-t-C0-t-C0	$I_{cs}$	kA	
240 V 50/60 Hz	$I_{cs}$	kA	37
400/415 V 50/60 Hz	$I_{cs}$	kA	37
440 V 50/60 Hz	$I_{cs}$	kA	26
525 V 50/60 Hz	$I_{cs}$	kA	19
690 V 50/60 Hz	$I_{cs}$	kA	15

Maximum back-up fuse, if the expected short-circuit currents at the installation location exceed the switching capacity of the circuit-breaker.

## Rated short-time withstand current

$t = 0.3 \text{ s}$	$I_{cw}$	kA	19.2
$t = 1 \text{ s}$	$I_{cw}$	kA	19.2

## Utilization category to IEC/EN 60947-2

Lifespan, mechanical (of which max. 50 % trip by shunt/undervoltage release)	Operations	10000
--	------------	-------

## Lifespan, electrical

AC-1			
400 V 50/60 Hz	Operations	3000	
415 V 50/60 Hz	Operations	3000	
690 V 50/60 Hz	Operations	2000	

AC-3			
400 V 50/60 Hz	Operations	2000	
415 V 50/60 Hz	Operations	2000	
690 V 50/60 Hz	Operations	1000	
Max. operating frequency	Ops/h	60	
Total break time at short-circuit	ms	< 25 ≤ 415 V; < 35 > 415 V	

### Terminal capacity

Standard equipment			Screw connection
Optional accessories			Tunnel terminal connection on rear Strip terminal
Round copper conductor			
Tunnel terminal			
Stranded			
4-hole	mm <sup>2</sup>	4 x (50 - 240)	
Bolt terminal and rear-side connection			
Direct on the switch			
Stranded	mm <sup>2</sup>	1 x (120 - 185) 4 x (50 - 185)	
Module plate			
Single hole	min.	mm <sup>2</sup>	1 x (120 - 300)
Single hole	max.	mm <sup>2</sup>	2 x (95 - 300)
Module plate			
Double hole	min.	mm <sup>2</sup>	2 x (95 - 185)
Double hole	max.	mm <sup>2</sup>	4 x (35 - 185)
Connection width extension		mm <sup>2</sup>	
Connection width extension	mm <sup>2</sup>	4 x 300 6 x (95 - 240)	
Al circular conductor			
Tunnel terminal			
Stranded			
4-hole	mm <sup>2</sup>	4 x (50 - 240)	
Cu strip (number of segments x width x segment thickness)			
Flat conductor terminal			
Flat conductor terminal	min.	mm	6 x 16 x 0.8
Flat conductor terminal	max.	mm	(2 x) 10 x 32 x 1.0
Module plate			
Single hole		mm	(2 x) 10 x 50 x 1.0
Bolt terminal and rear-side connection			
Flat copper strip, with holes	min.	mm	5 x 25 x 1.0
Flat copper strip, with holes	max.	mm	(2 x) 10 x 50 x 1.0
Connection width extension		mm	(2 x) 10 x 80 x 1.0
Copper busbar (width x thickness)	mm		
Bolt terminal and rear-side connection			
Screw connection			M10
Direct on the switch			
Direct on the switch	min.	mm	25 x 5
Direct on the switch	max.	mm	2 x (50 x 10)
Module plate			
Single hole	min.	mm	25 x 5
Single hole	max.	mm	2 x (50 x 10)
Module plate			
Double hole		mm	2 x (50 x 10)
Connection width extension		mm	
Connection width extension	min.	mm	60 x 10
Connection width extension	max.	mm	2 x (80 x 10)

Control cables		mm <sup>2</sup>	1 x (0.75 - 2.5) 2 x (0.75 - 1.5)
----------------	--	-----------------	--------------------------------------

## Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I <sub>n</sub>	A	1400
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	217.56
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

## Technical data ETIM 8.0


Low-voltage industrial components (EG000017) / Motor protection circuit-breaker (EC000074)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Motor protection circuit-breaker [ec1@ss10.0.1-27-37-04-01 [AGZ529016]]			
Overload release current setting	A	560 - 1400	
Adjustment range undelayed short-circuit release	A	2 - 14	
With thermal protection		Yes	
Phase failure sensitive		Yes	
Switch off technique		Electronic	
Rated operating voltage	V	690 - 690	
Rated permanent current I <sub>n</sub>	A	1400	
Rated operation power at AC-3, 230 V	kW	450	
Rated operation power at AC-3, 400 V	kW	800	
Type of electrical connection of main circuit		Screw connection	
Type of control element		Rocker lever	
Device construction		Built-in device fixed built-in technique	
With integrated auxiliary switch		No	
With integrated under voltage release		No	

Number of poles		3
Rated short-circuit breaking capacity Icu at 400 V, AC	kA	26
Degree of protection (IP)		IP20
Height	mm	170
Width	mm	210
Depth	mm	375

## Characteristics

Let-through current  
Let-through energy

## Dimensions

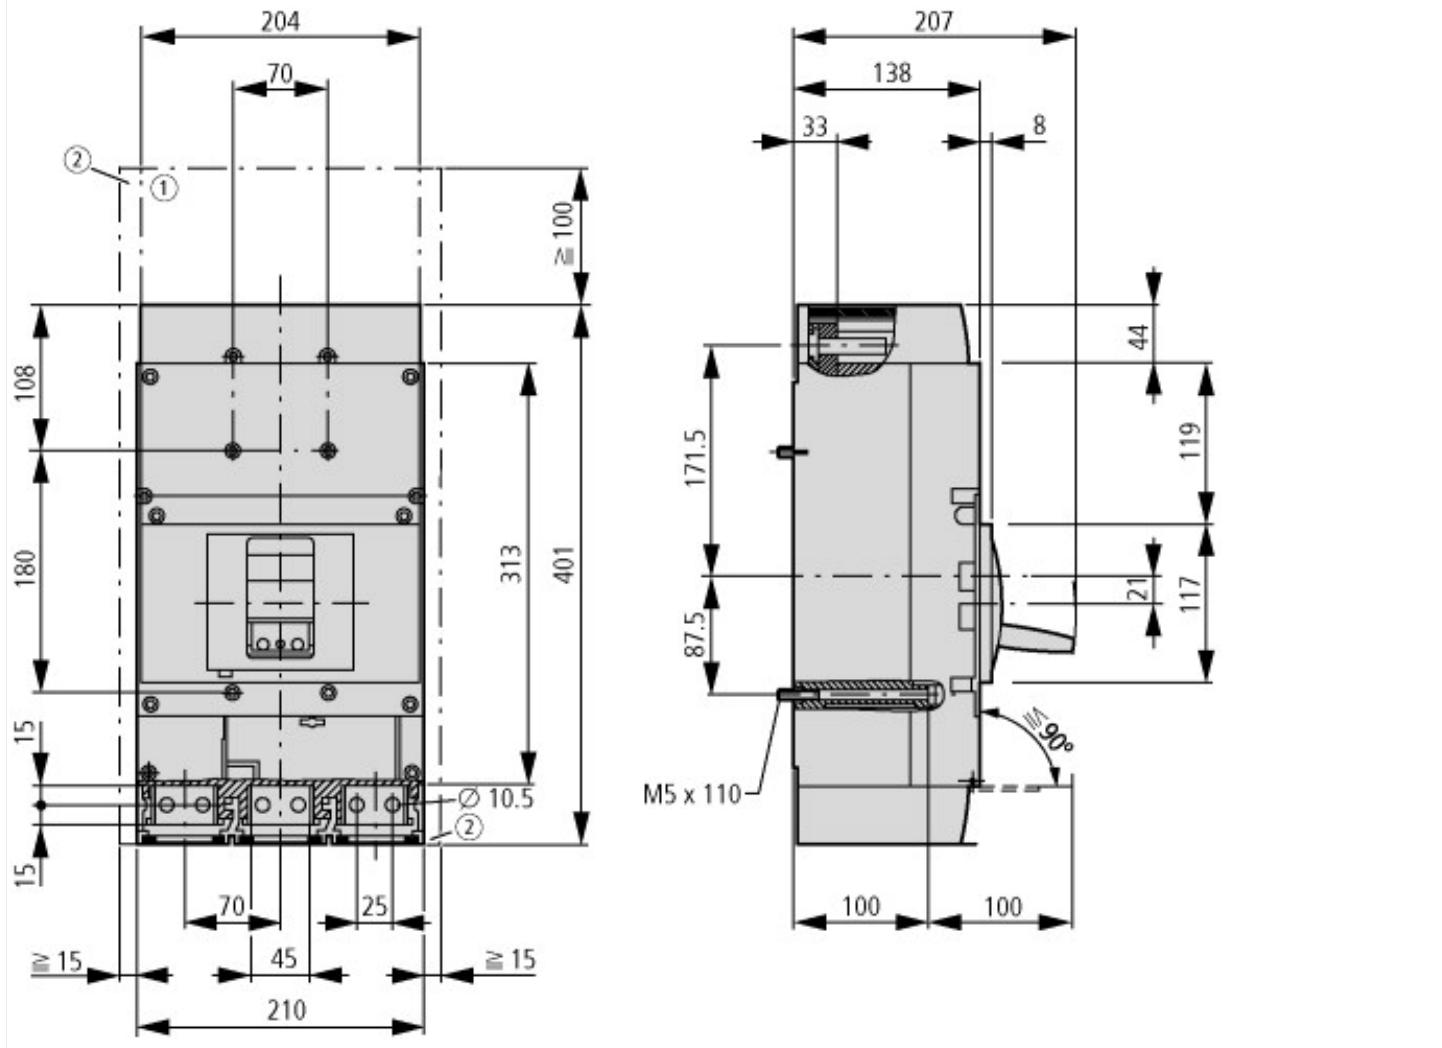

① Blow out area, minimum clearance to adjacent parts

Ui ≤ 690 V: 100 mm

Ui ≤ 1500 V: 200 mm

② Minimum clearance to adjacent parts

Ui ≤ 1000 V: 15 mm

Ui ≤ 1500 V: 70 mm

## Additional product information (links)

<b>IL012101ZU NZM4-PXR circuit-breaker, basic device, NZM4-PXR Circuit-Breaker, basic unit</b>	
IL012101ZU NZM4-PXR circuit-breaker, basic device, NZM4-PXR Circuit-Breaker, basic unit	<a href="https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL012101ZU2022_01.pdf">https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL012101ZU2022_01.pdf</a>
Weight	<a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.171">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.171</a>
Temperature dependency, Derating	<a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.172">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.172</a>
Effective power loss	<a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.174">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.174</a>
additional technical information for NZM power switch	<a href="https://es-assets.eaton.com/DOCUMENTATION/PDF/nzm_technic_de_en.pdf">https://es-assets.eaton.com/DOCUMENTATION/PDF/nzm_technic_de_en.pdf</a>