

# ABB i-bus® KNX

## Electronic Switch Actuator, Xfold, 1 A, MDRC

### ES/S X.1.2.1, 2CDG 110 05X R0011



2CDC 071 022 S0010

The Electronic Switch Actuators ES/S x.1.2.1 are modular installation devices in Pro M-Design. The devices feature 4 or 8 semiconductor outputs for control of electro-thermal valve drives, e.g. TSA/K, and electro-motor 3-point actuator drives, for example, for room temperature control. Furthermore, the devices are ideal for noiseless and wear-free switching of any loads, e.g. lamps. The outputs can be operated with either DC or AC voltage (24...230 V AC/DC).

The outputs can be combined as required, so that, e.g. output A controls electro-thermal valve drives, output B switches the lighting and outputs C and D control electro-motor actuator drives.

Each output is short-circuit and overload protected. The outputs can be directly controlled using the manual buttons. The LEDs on the front of the device signal the status of the outputs.

#### Technical data

<b>Supply</b>	Bus voltage	21...32 V DC
	Current consumption, bus	< 12 mA
	Leakage loss, bus	Maximum 250 mW
	Leakage loss per device at max. load	Maximum 4 W
<b>Outputs</b>	4 semiconductor outputs	non-isolated, short-circuit proofed
	Rated voltage $U_n$	24...230 V AC/DC +/-10 %, 45...65 Hz
	Rated current $I_n$ per output	1 A resistive load at $T_u$ up to 45 °C
	Inrush current per output	8 A for max. 1 second at $T_u$ 20 °C
	Number of electro-thermal valve drives per output	The number of connectible valve drives per output is dependent on the maximum inrush current (8 A) or continuous current (1 A) of the output. It may not be exceeded when several valve drives are connected in parallel. Observe the technical data for the valve drive.
	Separate supply of the outputs is possible. For example, A + B with 230 V AC, C + D with 24 V DC	
<b>Connections</b>	KNX	Via bus connection terminals
	Outputs A...X, supply $U_n$	Via universal head screw terminals
		0.2...4 mm <sup>2</sup> stranded, 2 x 0.2...2.5 mm <sup>2</sup> , 0.2...6 mm <sup>2</sup> solid, 2 x 0.2...4 mm <sup>2</sup>
<b>Operating and display elements</b>	Button/LED <i>Programming</i>  	For assignment of the physical address
	Button <i>Manual operation</i>  und LED <i>Manual operation</i> 	To switch to manual mode
	Button <i>ON/OFF</i>  and LED <i>Status</i>  per output	For control of the output and display of the status
	Button <i>Reset</i>  and LED <i>Fault</i>  per output	For reset and indication of a fault

# ABB i-bus® KNX

## Electronic Switch Actuator, Xfold, 1 A, MDRC

### ES/S X.1.2.1, 2CDG 110 05X R0011

<b>Enclosure</b>	IP 20	To EN 60 529
<b>Safety class</b>	II	To EN 61 140
<b>Isolation category</b>	Overvoltage category	III to EN 60 664-1
	Pollution degree	II to EN 60 664-1
<b>KNX safety extra low voltage</b>	SELV 30 V DC	
<b>Temperature range</b>		To EN 50 491
	Operation	-5 °C...+45 °C
	Storage	-25 °C...+55 °C
	Transport	-25 °C...+70 °C
<b>Ambient conditions</b>	Maximum air humidity	To EN 50 491
		95 %, no condensation allowed
<b>Design</b>	Modular installation device (MDRC)	Modular installation device, Pro M
	Dimensions	ES/S 4.1.2.1: 90 x 72 x 64.5 mm (H x W x D) ES/S 8.1.2.1: 90 x 144 x 64.5 mm (H x W x D)
	Mounting width in space units	ES/S 4.1.2.1: 4 modules at 18 mm ES/S 8.1.2.1: 8 modules at 18 mm
	Mounting depth	64.5 mm
<b>Installation</b>	On 35 mm mounting rail	To EN 60 715
<b>Mounting position</b>	As required	
<b>Weight (without batteries)</b>	ES/S 4.1.2.1	0.25 kg
	ES/S 8.1.2.1	0.38 kg
<b>Housing/colour</b>	Plastic housing, grey	
<b>Approvals</b>	KNX to EN 50 090-1, -2, EN 60 669-1,	Certification
	EN 50 428	
<b>CE mark</b>	In accordance with the EMC guideline and low voltage guideline	

Application program	Maximum number of communication objects	Maximum number of group addresses	Maximum number of associations
Switching Valve Drive 4f 1A/...*	76	254	254
Switching Valve Drive 8f 1A/...*	148	254	254

\* ... = current version number of the application program. **Please observe the software information on our homepage for this purpose.**

#### Note

For a detailed description of the application program see *Electronic Switch Actuator ES/S X.1.2.1* product manual. It is available free-of-charge at [www.abb.com/knx](http://www.abb.com/knx). The ETS and the current version of the device application program are required for programming.

The current version of the application program is available for download on the internet as [www.abb.com/knx](http://www.abb.com/knx). After import it is available in the ETS under *ABB/Heating, Ventilation, Air conditioning/Electronic switch actuator*.


The device does not support the locking function of a KNX device in the ETS. If you inhibit access to all devices of the project with a *BCU code*, it has no effect on this device. Data can still be read and programmed.

# ABB i-bus® KNX

## Electronic Switch Actuator, Xfold, 1 A, MDRC

### ES/S X.1.2.1, 2CDG 110 05X R0011

#### Circuit diagram

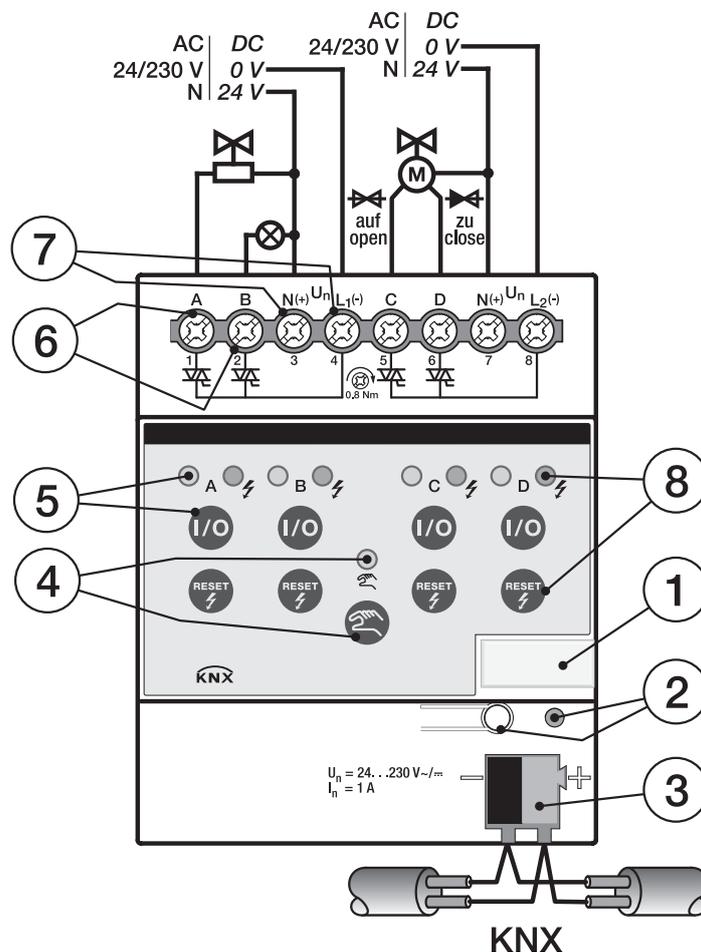

2CDC 072 028 F0012

#### ES/S 4.1.2.1

- 1 Label carrier
- 2 Button/LED *Programming* 
- 3 Bus connection terminal
- 4 Button *Manual operation*  and LED *Manual operation* 
- 5 Button *ON/OFF*  and LED *Status*  (for every output)
- 6 4 output terminals A...D
- 7 2 terminals each L(-), N(+) for outputs A + B, C + D
- 8 Button *Reset*  and LED *Fault*  (for every output)

#### Note


The outputs (A + B and C + D) can be operated in pairs with different supply voltages  $U_n$ .

# ABB i-bus® KNX

## Electronic Switch Actuator, Xfold, 1 A, MDRC

### ES/S X.1.2.1, 2CDC 110 05X R0011

#### Circuit diagram

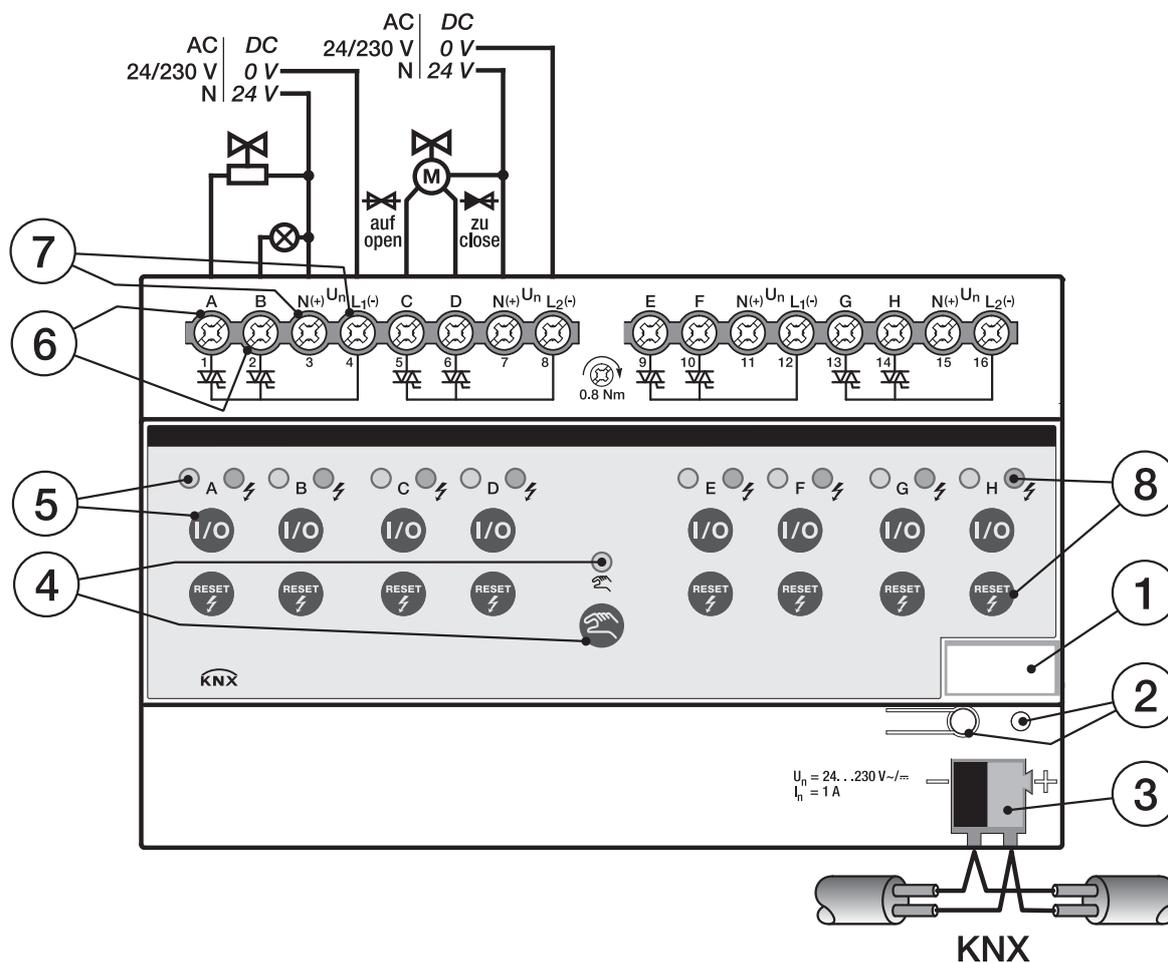

#### ES/S 8.1.2.1

- 1 Label carrier
- 2 Button/LED Programming
- 3 Bus connection terminal
- 4 Button *Manual operation* and LED *Manual operation*
- 5 Button *ON/OFF* and LED *Status* (for every output)
- 6 4 output terminals A...D
- 7 2 terminals each L(-), N(+) for outputs A + B, C + D, E + F, G + H
- 8 Button *Reset* and LED *Fault* (for every output)

#### Note

The outputs (A + B, C + D, E + F and G + H) can be operated in pairs with different supply voltages  $U_n$ .


2CDC.072.008.F0011

# ABB i-bus® KNX


## Electronic Switch Actuator, Xfold, 1 A, MDRC

### ES/S X.1.2.1, 2CDG 110 05X R0011


Dimension drawings

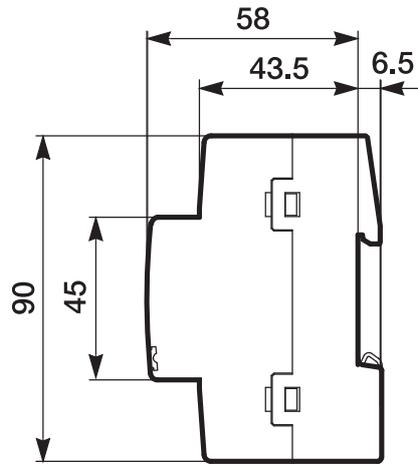


ES/S 4.1.2.1

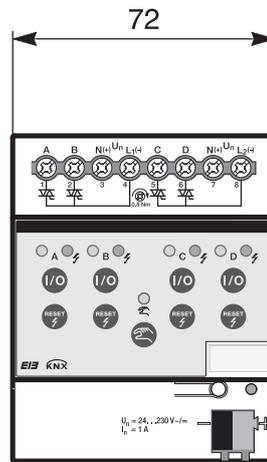

2CD 072 009 F0010

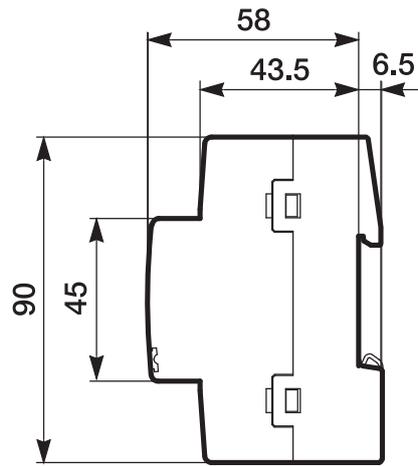

ES/S 8.1.2.1

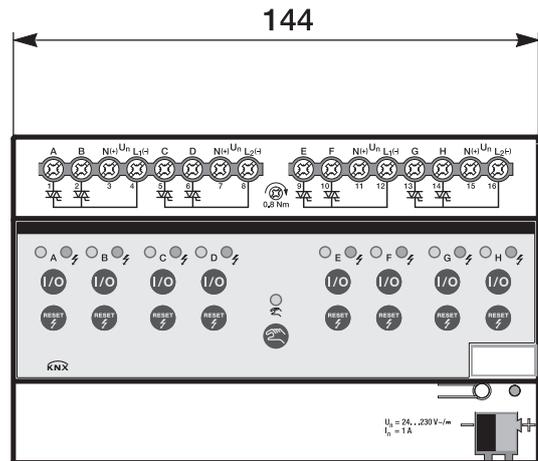

2CD 072 010 F0011

ABB i-bus® KNX  
Electronic Switch Actuator, Xfold, 1 A, MDRC  
ES/S X.1.2.1, 2CDG 110 05X R0011

**Notes**