

# PRODUCT DATASHEET

## LN INDV D 1200 34W/940

**LINEAR IndiviLED DIRECT | Surface mounted luminaire for single luminaire or light line application**



---

### AREAS OF APPLICATION

- Direct replacement for luminaires with fluorescent lamps
- Offices, schools
- General indoor illumination
- Corridors, entrance areas
- Seamless linear lighting
- Shop lighting

---

### PRODUCT BENEFITS

- Homogenous light distribution and reduced glare thanks to the IndiviLED optics
- Multiple mounting options
- The product family offers full lighting solution for different applications
- Energy savings of up to 50 % compared to T5 batten luminaires
- Further variants with DALI ECG, sensor, emergency lighting function according to IEC 60598-2-22 or through wiring additionally available
- Robust structure with IK06
- Low flicker light thanks to special electronic control gear
- 5 years guarantee

---

### PRODUCT FEATURES

- Each LED with individual lens and reflector for UGR<16 and homogenous light distribution
- Pendant mounting with suspension kit
- Linkable to an esthetic seamless light line with line connection adapter (surface or pendant mounting)



- Available with length of 1200 or 1500 mm
- Luminous flux up to 5700 lm
- Luminous efficacy: up to 125 lm/W
- Initial color consistency: < 4 SDCM
- Glow Wire Test according to IEC 60695-2-12: 850 °C
- Versions available with CRI 90
- Luminaire versions with IoT-ready DALI-2 driver or IoT Zigbee 3.0 technology available

## TECHNICAL DATA

### Electrical data

Nominal wattage	34.00 W
Operating mode	Integrated LED driver
Nominal voltage	220...240 V
Mains frequency	50/60 Hz
Power factor $\lambda$	> 0.90
Max. no. of lum. on circuit break. B16 A	30
Max. no. of lum. on circuit break. C10 A	24
Max. no. of lum. on circuit break. C16 A	38
Inrush current	25.0 A
Total harmonic distortion	$\leq 18 \%$
Inrush current time $T_{h50}$	100 $\mu$ s

### Luminaire control gear data

ECG - Life time	100000 h
Low flicker	Yes

### Photometrical data

Color temperature	4000 K
Color rendering index Ra	>90
Light color (designation)	Cool White
Luminous flux	3550 lm
Luminous efficacy	105 lm/W
Standard deviation of color matching	3 sdcM

### Light technical data

Beam angle	70 °
UGR lateral	<16
UGR longitudinal	<16

Dimensions & weight



Length	1199 mm
Width	120.0 mm
Height	40.0 mm
Product weight	2400.00 g

Colors & materials

Product color	White
Housing color	White
Body material	Aluminum
Cover material	Aluminium

Temperatures & operating conditions

Ambient temperature range	-20...+45 °C
---------------------------	--------------

Lifespan

Number of switching cycles	100000
Lifespan L70/B50 at 25 °C	60000 h
Lifespan L80/B10 at 25 °C	50000 h
Lifespan L90/B10 at 25 °C	35000 h

Additional product data

Mounting type	Suspended/Surface
Mounting location	Ceiling
Low flicker	Yes



Capabilities

Dimmable	No
Type of connection	Screwless terminal
LED module replaceable	Not replaceable

## Certificates &amp; standards

Type of protection	IP20
Protection class	I
Protection class IK (shock resistance)	IK06
Glow Wire Test according to IEC 60695-2-12	650 °C
Photobiological safety group EN62778	RG1
Photobio. safety group acc. to EN62471	RG0
Standards	CE/CB/ENEC/TÜV SÜD/EAC/RoHS

## Light Distribution

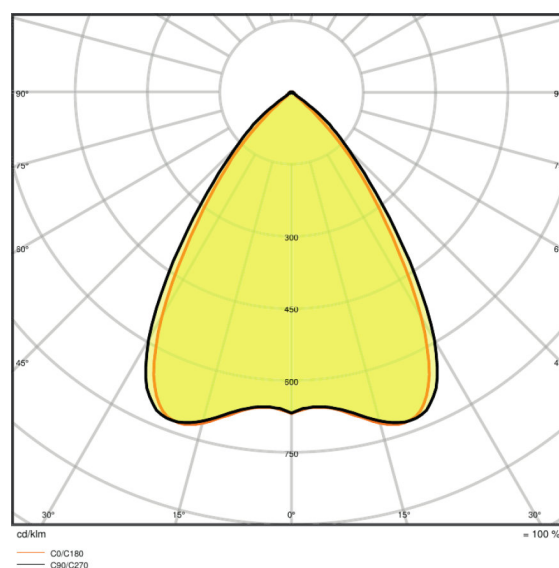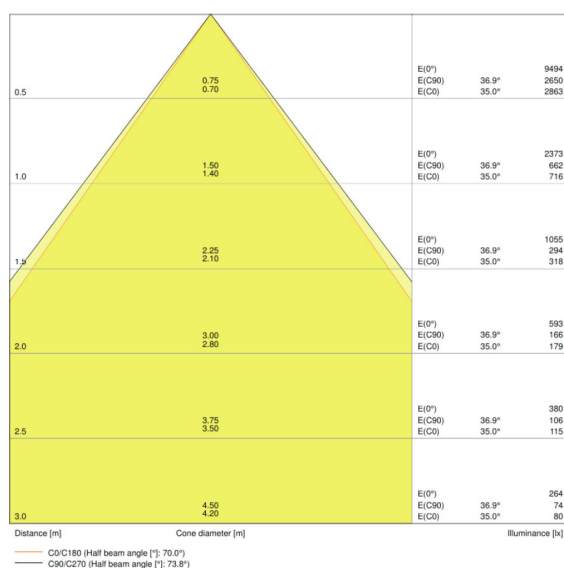

LDC typ cone

LDC typ polar

## EQUIPMENT / ACCESSORIES

- Ceiling connection box available
- Suspension kit available
- Line connection adapter available
- Through-wiring cable kit available




## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075522435	Folding carton box 1	132 mm x 1334 mm x 52 mm	2593.00 g	9.16 dm <sup>3</sup>

4058075522442	Shipping carton box 4	1357 mm x 207 mm x 169 mm	11302.00 g	47.47 dm <sup>3</sup>
---------------	--------------------------	---------------------------	------------	-----------------------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

#### ADDITIONAL CATALOG INFORMATION

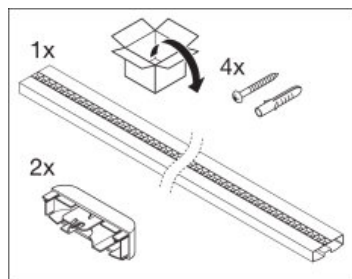

#### REFERENCES / LINKS

For Guarantee see

► [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.