




Skjøt RJ45 Cat 6A/10G STP Keystone

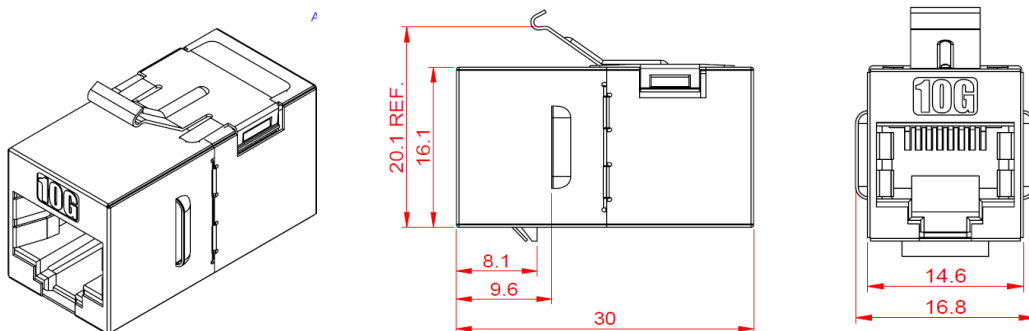

Cat 6A/10G STP RJ45 for keystone montering.

MATERIAL

SHIELDED CASE : BRASS,NICKEL PLATED.
BRACKET : SUS304.
COUPLER HOUSING : ABS,UL94V-0.
CONTACT HOLDER : ABS,UL94V-0.
SPRING WIRE : PHOSPHOR BRONZE,50U" GOLD PLATED.

PHYSICAL CHARACTERISTICS

INSERTION LIFE : 750 MATING CYCLES WITH FCC COMPLIANT 8P PLUG.
CONTACT FORCE : 100 GRAMS WITH FCC COMPLIANT 8P PLUG.
PLUG RETENTION FORCE : 11 LBF MIN.
OPERATING TEMPERATURE RANGE : -10°C TO 60°C.
STORAGE TEMPERATURE RANGE : -40°C TO 68°C.
HUMIDITY : 10%~90%RH.

ELECTRICAL

INSULATION RESISTANCE : 500 MΩ.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC.
DC CURRENT RATING : 1.5 Amps.
DC RESISTANCE : 0.1Ω.
CONTACT RESISTANCE : 20mΩ.

NOTE

- WILL NOT SUPPORT CHANNEL SHORTER THAN 15M.
- ONLY ACCEPT RJ-45 8P8C PLUG.

Molex art.nr	El.nr	Beskrivelse
O2100LQ-8S-10G-BK	6909807	RJ45 skjøt Cat 6A/10G STP Sort
O2100LQ-8S-10G-W4		RJ45 skjøt Cat6A/10G STP Hvit