


# Hurdal PIR



220-240V~, 50/60Hz

2: Replaceable (LED only)  
light source by a professional



3: Replaceable control gear  
by a professional



**NO:** Kan kun installeres og vedlikeholdes av en registrert installasjonsvirksomhet.

**DK:** Må kun installeres og vedligeholdes af uddannet elektriker.

**SE:** Skall installeras och underhållas av behörig elektriker.

**EN:** Only to be installed and maintained by an authorized electrician.

**FR:** Doit être installé et maintenu par un électricien qualifié.

**NL:** Mag alleen geïnstalleerd en onderhouden worden door een bevoegde electricien.

**DE:** Dieses Produkt darf nur durch autorisiertes Personal (z.B. Elektro-Installateur)

angeschlossen, in Betrieb genommen und gewartet werden.

**FI:** Asentaa ja huoltaa saa vain valtuutettu sähköasentaja

**NO:** Skru av strømmen før montering.

**DK:** Sluk for strømmen inden montering.

**SE:** Stäng av strömmen innan montering.


**EN:** Turn off power before installing.

**FR:** Couper le courant avant l'installation.







**NL:** Stroom uitschakelen voor u het toestel installeert.

**DE:** Vor Installationsarbeiten den Strom abschalten.

**FI:** Sammuta virta ennen kytkemistä

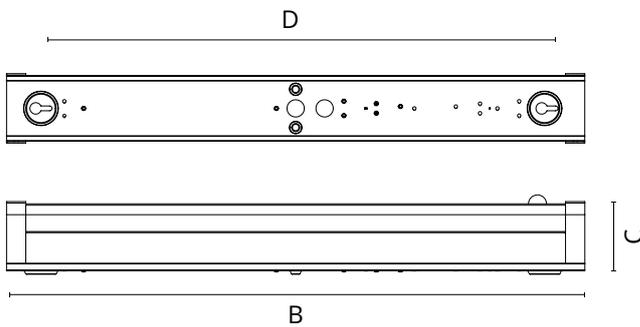

Hurdal	A	B	C	D
600	72mm	600mm	76mm	525mm
1200	72mm	1200mm	76mm	1100mm
1500	72mm	1500mm	76mm	1400mm

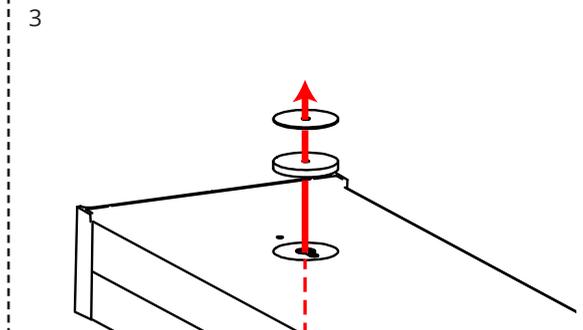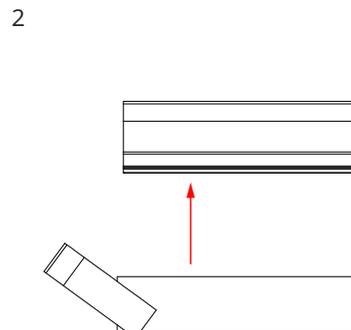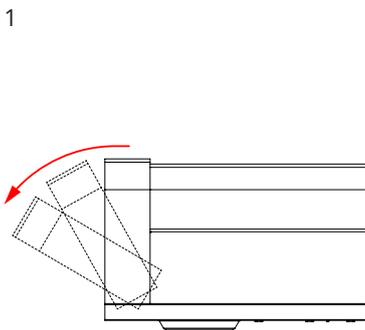

## NORWAY

SG Armaturen AS

Skytterheia 25  
N-4790 Lillesand

Tel: +47 37 50 03 00  
firmapost@sg-as.no  
www.sg-as.no

## SWEDEN

SG Armaturen AB  
Tel: +46 31 81 71 10  
info@sg-ab.se  
www.sg-ab.se

## DENMARK

SG Armaturen A/S  
Tel: +45 70 70 72 13  
info@sg-as.dk  
www.sg-as.dk

## GERMANY

SG Leuchten GmbH  
Tel: +49 40 23 99 44 59  
info@sg-leuchten.de  
www.sg-leuchten.de

## FINLAND

SG Armaturen Oy  
Tel: +358 02 07 30 39 60  
info@sg-oy.fi  
www.sg-oy.fi

## FRANCE

SG Lighting SA/NV  
Tel: +33(0) 4 94 93 00 00  
info.france@sglighting.fr  
www.sglighting.net

## BENELUX

SG Lighting SA/NV  
Tel: +32(0) 15 20 72 71  
info.benelux@sglighting.net  
www.sglighting.net

## SWITZERLAND

SG Leuchten SA  
Tel: + +41 44 868 20 00  
info@sg-leuchten.ch  
sg-leuchten.ch

## INTERNATIONAL

SG Lighting Co Ltd.  
Tel: +86 769 88 49 20 88  
cindy@sgdgc.com  
www.sg-as.com

## PIR settings

● switch up  
○ switch down

1	Sensitivity
○	50%
X ●	100%

2	3	Hold Time
○	○	5s (test mode)
X ○	●	5Min
●	○	15Min
●	●	30Min

4	5	6	7	8	Lux
●	○	○	○	○	100
○	●	○	○	○	200
○	○	●	○	○	300
○	○	○	●	○	400
○	○	○	○	●	500
X ○	○	○	○	○	OFF

☺ ☾☀

N E L L'

↑ ↓    ↑    ↑ ↓

Max 200W  
Master/Slave load

X= Standard

## Dipswitch settings

### Hurdal 600

Standard

<b>mA</b>	200	250	300	350	400	450
<b>lm</b>	67%	83%	100%	117%	133%	-

UGR>25

### Hurdal 1200

Standard

<b>mA</b>	500	600	700	800
<b>lm</b>	83%	100%	117%	-

UGR>25

### Hurdal 1500

Standard

<b>mA</b>	500	600	700	800
<b>lm</b>	63%	75%	88%	100%