



INSTA CONTACTOR WITH 2 MAKE A. 2 BREAK
CONTACTS CONTACT FOR 230,
400 V AC, 25 A TRIGGERING 230 V AC

Similar to image

Technical data:		
Mounting depth	mm	64
Height	mm	90
Width	mm	36
Depth	mm	71
Number of NC contacts		2
Number of NO contacts		2
Number of pitch units for width		2
Switching capacity real power / for filament lamp load	W	2,000
Type of voltage		AC
• for operating		AC
• of the operating voltage		AC
Control supply voltage / rated value	V	230
Operating current / rated value	A	25
Operating voltage / rated value		
• minimum	V	440
• maximum	V	440
Protection class IP		IP20
Product extension / can be installed / supplementary device		Yes

Product component / slide for manual operation		No
Control supply voltage / rated value / maximum	V	230
Item designation		
• according to DIN EN 61346-2 • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		Q Q

Certificates/approvals:

General Product Approval	Declaration of Conformity	other
 GOST	 EG-Konf.	other Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT5832-0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT5832-0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

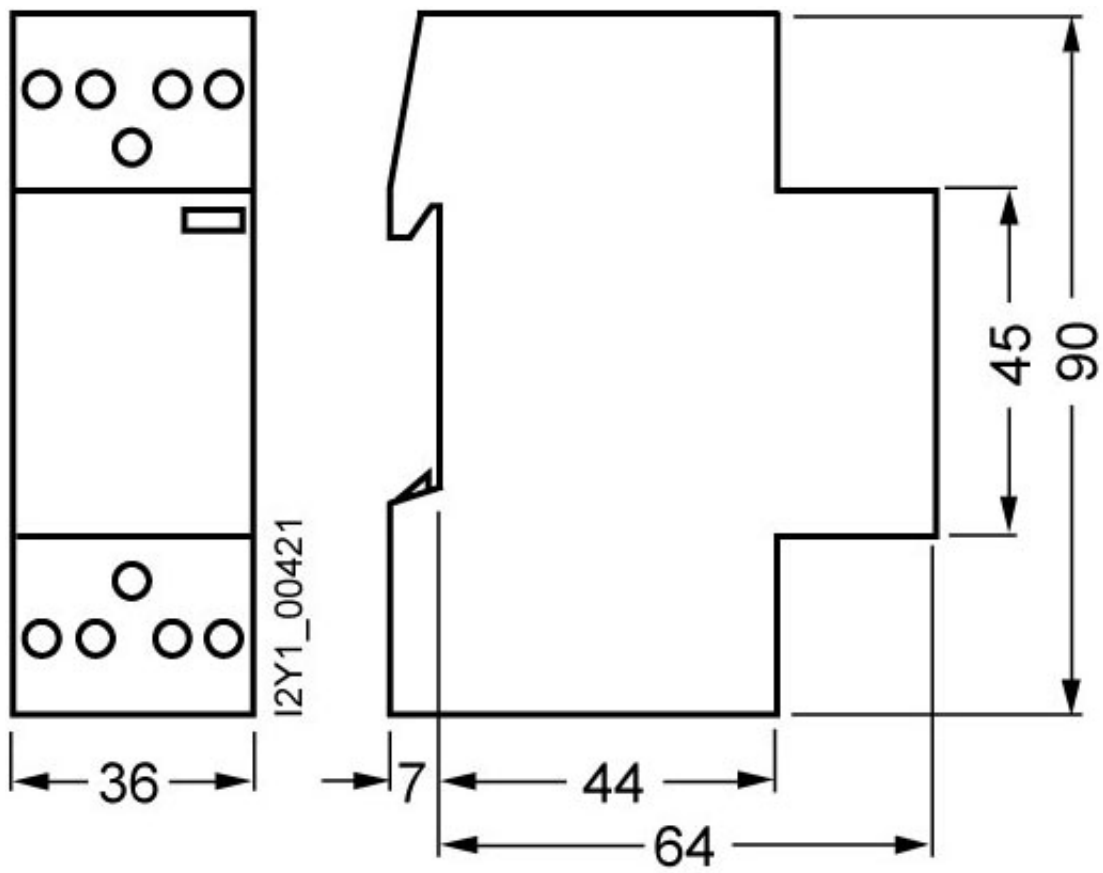

last change:

Mar 18, 2013