## **DATASHEET - FAZT-C10/1N**

Part no.

(Norway)



Miniature circuit breaker (MCB), 10A, 1Np, C-Char, AC

FAZT-C10/1N Catalog No. 241027 Eaton Catalog No. FAZT-C10/1N **EL-Nummer** 0001666013



#### **Technical data Electrical**

Lieculcal			
Standards			IEC/EN 60947-2
Rated voltage according to IEC/EN 60947-2	Un	V AC	240
Rated switching capacity acc. to IEC/EN 60947-2	I <sub>cu</sub>	kA	25
Rated service short-circuit breaking capacity according to IEC/EN 60947-2	I <sub>cs</sub>		12,5 kA
Max operational voltage according to IEC/EN 60947-2		V AC	254
Rated switching capacity according to IEC/EN 60947-2 (max operational voltage)	I <sub>cu</sub>	kA	15
Rated service short-circuit breaking capacity according to IEC/EN 60947-2 (max operational voltage)	I <sub>cs</sub>		7,5 kA
Max operational voltage DC according to IEC/EN 60947-2		V DC	60/pole
Rated voltage according to IEC/EN 60898-1	Un	V AC	240
Rated switching capacity according to IEC/EN 60898-1	I <sub>cn</sub>	kA	15
Rated service short-circuit breaking capacity according to IEC/EN 60898-1	I <sub>cs</sub>		7,5 kA
Rated insulation voltage	Ui	V	440
Rated frequency	f	Hz	50/60
Characteristic			B, C, D
Direction of incoming supply			as required
lifespan			
Electrical	Operations		≧ 4000
Mechanical	Operations		≧ 10000
Mechanical			
Standard front dimension		mm	45
Enclosure height		mm	80
Mounting width per pole		mm	17.5
Mounting			Quick attachment with 3 latch positions for top-hat rail IEC/EN 60715
Degree of Protection			IP20
Terminals top and bottom			Twin-purpose terminals
Terminal protection			Finger- and back-of-hand proof according to BGV A3 and ÖVE-EN 6
Terminal capacities		mm <sup>2</sup>	1 - 25
Tightening torque of fixing screws		N/m	max. 2.4
Thickness of busbar material		mm	0.8 (exept N 0.5 SU)
Mounting position			As required

# Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	In	А	10
Heat dissipation per pole, current-dependent	P <sub>vid</sub>	W	0
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	1.7
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	0
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	-40
Operating ambient temperature max.		°C	75
			linear, per +1 °C, results in a 0.5% reduction of current carrying capacity
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.


10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provided the information in the instruction		
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects   Meets the product standard's requirements.     10.2.4 Resistance to ultra-violet (UV) radiation   Meets the product standard's requirements.     10.2.5 Lifting   Does not apply, since the entire switchgear needs to be evaluated.     10.2.6 Mechanical impact   Does not apply, since the entire switchgear needs to be evaluated.     10.3.0 Begree of protection of ASSEMBLIES   Does not apply, since the entire switchgear needs to be evaluated.     10.4 Clearances and creepage distances   Does not apply, since the entire switchgear needs to be evaluated.     10.5 Protection against electric shock   Does not apply, since the entire switchgear needs to be evaluated.     10.6 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     10.9 Instruction advicting devices and components   Does not apply, since the entire switchgear needs to be evaluated.     10.9 Instruction for external conductors   Is the panel builder's responsibility.     10.9 Instruction properties   Is the panel builder's responsibility.     10.9.1 Store requery electric strength   Is the panel builder's responsibility.     10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.1 Store-circuit rating   Is the panel builder's responsibility. <td>10.2.3.1 Verification of thermal stability of enclosures</td> <td>Meets the product standard's requirements.</td>	10.2.3.1 Verification of thermal stability of enclosures	Meets the product standard's requirements.
and fire due to internal electric effects   Meta to internal electric effects     102.4 Resistance to ultra-violet (UV) radiation   Meta the product standard's requirements.     102.5 Lifting   Does not apply, since the entire switchgear needs to be evaluated.     102.6 Mechanical impact   Does not apply, since the entire switchgear needs to be evaluated.     103.7 Inscriptions   Metas the product standard's requirements.     104.4 Clearances and creepage distances   Metas the product standard's requirements.     105.5 Protection against electric shock   Metas the product standard's requirements.     105.1 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     105.1 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     105.2 Power-frequency electric strength   Does not apply, since the entire switchgear needs to be evaluated.     108.2 Power-frequency electric strength   Ste panel builder's responsibility.     109.3 Inpulse withstand voltage   Is the panel builder's responsibility.     10.0 Temperature rise   Is the panel builder's responsibility.     10.1 Mont-circuit rating   Is the panel builder's responsibility.     10.1 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed. <td>10.2.3.2 Verification of resistance of insulating materials to normal heat</td> <td>Meets the product standard's requirements.</td>	10.2.3.2 Verification of resistance of insulating materials to normal heat	Meets the product standard's requirements.
10.2.5 LiftingDoes not apply, since the entire switchgear needs to be evaluated.10.2.5 LiftingDoes not apply, since the entire switchgear needs to be evaluated.10.2.5 LiftingDoes not apply, since the entire switchgear needs to be evaluated.10.3.0 Egree of protection of ASSEMBLIESDoes not apply, since the entire switchgear needs to be evaluated.10.4 Clearances and creepage distancesDoes not apply, since the entire switchgear needs to be evaluated.10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9.1 Nover-frequency electric strengthIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Inpulse withstand voltageIs the panel builder's responsibility.10.9.1 Temperature riseIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.13 Mechanical functionIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.13 Mechanical		Meets the product standard's requirements.
10.2.6 Mechanical impact   Does not apply, since the entire switchgear needs to be evaluated.     10.2.7 Inscriptions   Meets the product standard's requirements.     10.3 Degree of protection of ASSEMBLIES   Does not apply, since the entire switchgear needs to be evaluated.     10.4 Clearances and creepage distances   Meets the product standard's requirements.     10.5 Protection against electric shock   Does not apply, since the entire switchgear needs to be evaluated.     10.6 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     10.7 Internal electrical circuits and connections   Is the panel builder's responsibility.     10.8 Connections for external conductors   Is the panel builder's responsibility.     10.9.1 neurol electric strength   Is the panel builder's responsibility.     10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.10 Temperature rise   Is the panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   Is the op	10.2.4 Resistance to ultra-violet (UV) radiation	Meets the product standard's requirements.
10.2.7 Inscriptions   Meets the product standard's requirements.     10.3 Degree of protection of ASSEMBLIES   Does not apply, since the entire switchgear needs to be evaluated.     10.4 Clearances and creepage distances   Meets the product standard's requirements.     10.5 Protection against electric shock   Does not apply, since the entire switchgear needs to be evaluated.     10.6 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     10.7 Internal electrical circuits and connections   Is the panel builder's responsibility.     10.8 Connections for external conductors   Is the panel builder's responsibility.     10.9 Insulation properties   Is the panel builder's responsibility.     10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.10 Temperature rise   The panel builder's responsibility.     10.10 Temperature rise   Is the panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provided the	10.2.5 Lifting	Does not apply, since the entire switchgear needs to be evaluated.
10.3 Degree of protection of ASSEMBLIES   Does not apply, since the entire switchgear needs to be evaluated.     10.4 Clearances and creepage distances   Meets the product standard's requirements.     10.5 Protection against electric shock   Does not apply, since the entire switchgear needs to be evaluated.     10.6 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     10.7 Internal electrical circuits and connections   Is the panel builder's responsibility.     10.8 Connections for external conductors   Is the panel builder's responsibility.     10.9 Insulation properties   Is the panel builder's responsibility.     10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.10 Temperature rise   Is the panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provided the information in the instruction	10.2.6 Mechanical impact	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances   Meets the product standard's requirements.     10.5 Protection against electric shock   Does not apply, since the entire switchgear needs to be evaluated.     10.6 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     10.7 Internal electrical circuits and connections   Is the panel builder's responsibility.     10.8 Connections for external conductors   Is the panel builder's responsibility.     10.9 Insulation properties   Is the panel builder's responsibility.     10.9.1 Rupuse withstand voltage   Is the panel builder's responsibility.     10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.9.1 Temperature rise   Is the panel builder's responsibility.     10.10 Temperature rise   Is the panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provided the information in the instruction	10.2.7 Inscriptions	Meets the product standard's requirements.
10.5 Protection against electric shock   Does not apply, since the entire switchgear needs to be evaluated.     10.6 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     10.7 Internal electrical circuits and connections   Is the panel builder's responsibility.     10.8 Connections for external conductors   Is the panel builder's responsibility.     10.9 Insulation properties   Is the panel builder's responsibility.     10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.9.4 Testing of enclosures made of insulating material   Is the panel builder's responsibility.     10.10 Temperature rise   The panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provided the information in the instruction	10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     10.7 Internal electrical circuits and connections   Is the panel builder's responsibility.     10.8 Connections for external conductors   Is the panel builder's responsibility.     10.9 Insulation properties   Is the panel builder's responsibility.     10.9.1 Supulse withstand voltage   Is the panel builder's responsibility.     10.9.4 Testing of enclosures made of insulating material   Is the panel builder's responsibility.     10.10 Temperature rise   Is the panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provided the information in the instruction	10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.7 Internal electrical circuits and connections   Is the panel builder's responsibility.     10.8 Connections for external conductors   Is the panel builder's responsibility.     10.9 Insulation properties   Is the panel builder's responsibility.     10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.9.4 Testing of enclosures made of insulating material   Is the panel builder's responsibility.     10.10 Temperature rise   Is the panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provide the information in the instruction	10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.8 Connections for external conductors   Is the panel builder's responsibility.     10.9 Insulation properties   Is the panel builder's responsibility.     10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.9.4 Testing of enclosures made of insulating material   Is the panel builder's responsibility.     10.10 Temperature rise   The panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provided the information in the instruction	10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.9 Insulation propertiesInsulation properties10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Impulse withstand voltageIs the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder is responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.13 Mechanical functionThe device meets the requirements, provided the information in the instruction	10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.9.4 Testing of enclosures made of insulating material   Is the panel builder's responsibility.     10.10 Temperature rise   Is the panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provide the information in the instruction	10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.9.4 Testing of enclosures made of insulating material   Is the panel builder's responsibility.     10.10 Temperature rise   The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provide the information in the instruction	10.9 Insulation properties	
10.9.4 Testing of enclosures made of insulating material   Is the panel builder's responsibility.     10.10 Temperature rise   Is the panel builder's responsibile for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provide the information in the instruction	10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.10 Temperature rise   The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provide the information in the instruction	10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provide the information in the instruction	10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provided the information in the instruction	10.10 Temperature rise	
10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
	10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
leafiet (IL) is observed.	10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

### **Technical data ETIM 7.0**

Circuit breakers and fuses (EG000020) / Miniature circuit breaker (MCB) (EC000042)

Electric engineering, automation, process control engineering / Electrical installation, device / Miniature circuit breaker system (MCB) / Miniature circuit breaker (MCB) (ecl@ss10.0.1-27-14-19-01 [AAB905014])

(ecl@ss10.0.1-27-14-19-01 [AAB905014])		
Release characteristic		C
Number of poles (total)		2
Number of protected poles		1
Rated current	А	10
Rated voltage	V	230
Rated insulation voltage Ui	V	440
Rated impulse withstand voltage Uimp	kV	4
Rated short-circuit breaking capacity Icn EN 60898 at 230 V	kA	15
Rated short-circuit breaking capacity Icn EN 60898 at 400 V	kA	15
Rated short-circuit breaking capacity Icu IEC 60947-2 at 230 V $$	kA	25
Rated short-circuit breaking capacity Icu IEC 60947-2 at 400 V	kA	25
Voltage type		AC
Frequency	Hz	50 - 60
Current limiting class		3
Suitable for flush-mounted installation		No
Concurrently switching N-neutral		Yes
Over voltage category		3
Pollution degree		2
Additional equipment possible		Yes
Width in number of modular spacings		2
Built-in depth	mm	70.5
Degree of protection (IP)		IP20
Ambient temperature during operating	°C	-25 - 75
Connectable conductor cross section multi-wired	mm²	1 - 25
Connectable conductor cross section solid-core	mm²	1 - 25

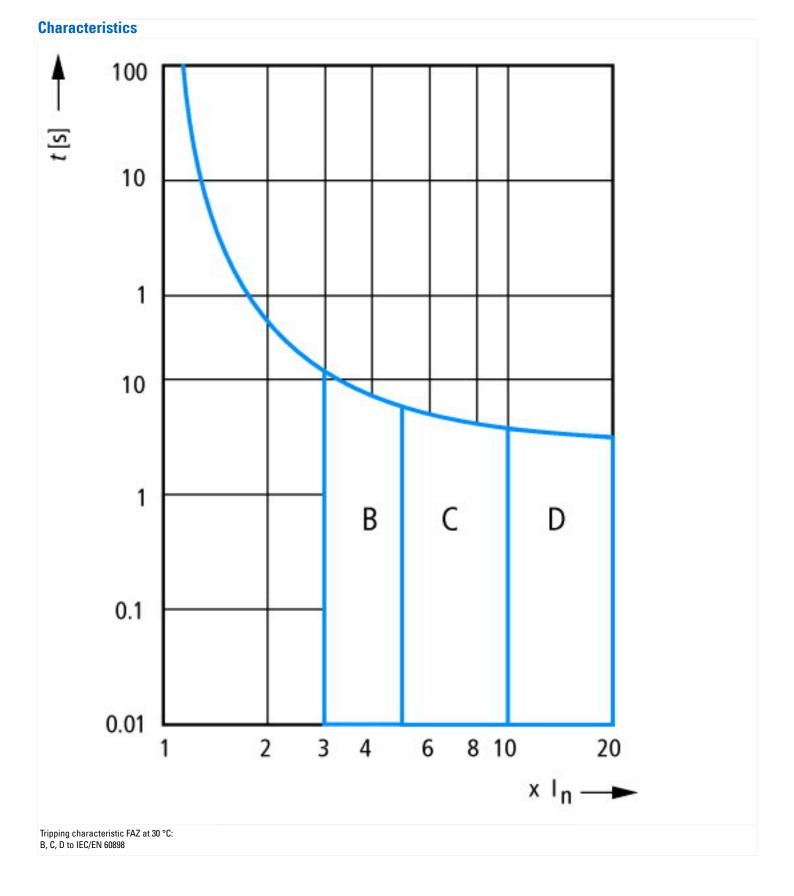

## Dimensions

