DATASHEET - FAZ-Z10/1

Part no.

Miniature circuit breaker (MCB), 10A, 1p, Z-Char, AC





FAZ-Z10/1 Catalog No. 278625 Eaton Catalog No. FAZ-Z10/1 EL-Nummer 0001695253 (Norway)

Similar to illustration

Technical data

Electrical			
Standards			IEC/EN 60947-2 IEC/EN 60898
Rated operational voltage	U _e	V	
	U _e	V AC	240/415
		V DC	60 (per pole)
Rated switching capacity acc. to IEC/EN 60947-2	I _{cu}	kA	10
Operational switching capacity		kA	7.5
Characteristic			B, C, D, K, S, Z
Max. back-up fuse		A gL/gG	125
Selectivity Class			3
lifespan			
Lifespan	Operations		> 10000
Direction of incoming supply			as required
Mechanical			
Standard front dimension		mm	45
Enclosure height		mm	80
Mounting width per pole		mm	17.5
Mounting			IEC/EN 60715 top-hat rail
Degree of Protection			IP20, IP40 (when fitted)
Terminals top and bottom			Twin-purpose terminals
Terminal protection			Finger and back-of-hand proof to BGV A2
Terminal capacities		mm ²	
		mm ²	1 x 25
		mm ²	2 x 10
Thickness of busbar material		mm	0.8 2
Mounting position			As required

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I _n	А	10
Heat dissipation per pole, current-dependent	P _{vid}	W	0
Equipment heat dissipation, current-dependent	P _{vid}	W	3.3
Static heat dissipation, non-current-dependent	P _{vs}	W	0
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-40
Operating ambient temperature max.		°C	75
			linear, per +1 °C, results in a 0.5% reduction of current carrying capacity
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.

10.2.3 1 Verification of thermal stability of enclosures Meets the product standard's requirements. 10.2.3 2 Verification of resistance of insulating materials to normal heat and fire due to internal electric effects Meets the product standard's requirements. 10.2.4 Resistance to ultra-violet (UV) radiation Meets the product standard's requirements. 10.2.5 Lifting Dees not apply, since the entire switchgear needs to be evaluated. 10.2.7 Inscriptions Meets the product standard's requirements. 10.3 Degree of protection of ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated. 10.4 Clearances and creepage distances Does not apply, since the entire switchgear needs to be evaluated. 10.5 Protection against electric shock Dees not apply, since the entire switchgear needs to be evaluated. 10.5 Protection against electric shock Dees not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Dees not apply, since the entire switchgear needs to be evaluated. 10.8 Connections for external conductors Is the panel builder's responsibility. 10.8 Connections for external conductors Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9 A Testing of enclosures made of insulating material Is the panel builder's responsibilit		
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effectsMeets the product standard's requirements.10.2.4 Resistance to ultra-violet (UV) radiationMeets the product standard's requirements.10.2.5 LiftingDoes not apply, since the entire switchgear needs to be evaluated.10.2.5 LiftingDoes not apply, since the entire switchgear needs to be evaluated.10.2.5 InscriptionsDoes not apply, since the entire switchgear needs to be evaluated.10.3 Degree of protection of ASSEMBLIESDoes not apply, since the entire switchgear needs to be evaluated.10.4 Clearances and creepage distancesMeets the product standard's requirements.10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.5 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.9 Insulation propertiesIs the panel builder's responsibility.10.9 Insulation propertiesIs the panel builder's responsibility.10.9.1 Subardio propertiesIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.1 Subardio propertiesIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.13 Mechanical fun	10.2.3.1 Verification of thermal stability of enclosures	Meets the product standard's requirements.
and fire due to internal electric effectsA fire due to internal electric effects10.2.4 Resistance to ultra-violet (UV) radiationMeets the product standard's requirements.10.2.5 LiftingDees not apply, since the entire switchgear needs to be evaluated.10.2.5 Mechanical impactDees not apply, since the entire switchgear needs to be evaluated.10.2.7 InscriptionsMeets the product standard's requirements.10.3.0 egree of protection of ASSEMBLIESDees not apply, since the entire switchgear needs to be evaluated.10.4 Clearances and creepage distancesMeets the product standard's requirements.10.5 Protection against electric shockDees not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDees not apply, since the entire switchgear needs to be evaluated.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9 Insulation propertiesIs the panel builder's responsibility.10.9.1 Nuelse withstand voltageIs the panel builder's responsibility.10.10 Temperature riseThe panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be subserved.10.13 Mechanical functionIs the panel builder's responsibility. The specifications for the switchgear must be subserved.	10.2.3.2 Verification of resistance of insulating materials to normal heat	Meets the product standard's requirements.
10.2.5 LiftingDoes not apply, since the entire switchgear needs to be evaluated.10.2.6 Mechanical impactDoes not apply, since the entire switchgear needs to be evaluated.10.3.0 Egree of protection of ASSEMBLIESDoes not apply, since the entire switchgear needs to be evaluated.10.4 Clearances and creepage distancesDoes not apply, since the entire switchgear needs to be evaluated.10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsDoes not apply, since the entire switchgear needs to be evaluated.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9 Insulation propertiesIs the panel builder's responsibility.10.9.1 Temperature riseIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility.10.12 Electromagnetic compatibility.Is the panel builder's responsibility.10.13 Mechanical functionIs the panel builder's responsibility.10.13 Mechanical functionIs the panel builder's responsibility.		Meets the product standard's requirements.
10.2.6 Mechanical impactDoes not apply, since the entire switchgear needs to be evaluated.10.3.7 InscriptionsMeets the product standard's requirements.10.3 Degree of protection of ASSEMBLIESDoes not apply, since the entire switchgear needs to be evaluated.10.4 Clearances and creepage distancesMeets the product standard's requirements.10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9.1 Noularing of enclosures made of insulating materialIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility.10.12 Electromagnetic compatibilityIs the panel builder's responsibility.10.13 Mechanical functionIs the panel builder's responsibility.	10.2.4 Resistance to ultra-violet (UV) radiation	Meets the product standard's requirements.
10.2.7 Inscriptions Meets the product standard's requirements. 10.3 Degree of protection of ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated. 10.4 Clearances and creepage distances Meets the product standard's requirements. 10.5 Protection against electric shock Does not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility. 10.8 Connections for external conductors Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.1 Neulation properties Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.1 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function The devic	10.2.5 Lifting	Does not apply, since the entire switchgear needs to be evaluated.
10.3 Degree of protection of ASSEMBLIES Dees not apply, since the entire switchgear needs to be evaluated. 10.4 Clearances and creepage distances Dees not apply, since the entire switchgear needs to be evaluated. 10.5 Protection against electric shock Dees not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Dees not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility. 10.8 Connections for external conductors Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder is responsibility. 10.11 Short-circuit rating Is the panel builder is responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function Is the opanel builder's responsibility. The specifications for the switchgear must be observed.	10.2.6 Mechanical impact	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances Meets the product standard's requirements. 10.5 Protection against electric shock Does not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility. 10.8 Connections for external conductors Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.1 Rules withstand voltage Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.1 Temperature rise Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.2.7 Inscriptions	Meets the product standard's requirements.
10.5 Protection against electric shock Dees not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility. 10.8 Connections for external conductors Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.1 Power-frequency electric strength Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility. 10.8 Connections for external conductors Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function Is the panel builder's responsibility. The specifications for the switchgear must be observed.	10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.7 Internal electrical circuits and connections Is the panel builder's responsibility. 10.8 Connections for external conductors Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.8 Connections for external conductors Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.9 Insulation properties10.9 Insulation properties10.9 Insulation properties10.9 Insulation propertiesIs the panel builder's responsibility.10.9.1 Mpulse withstand voltage10.9.4 Testing of enclosures made of insulating material10.9Is the panel builder's responsibility.10.9.1 Temperature rise10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit rating10.12 Electromagnetic compatibility.Is the panel builder's responsibility. The specifications for the switchgear must be observed.10.13 Mechanical function10.14 evice meets the requirements, provide the information in the instruction	10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility. Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function Image: State of the temperature intermation in the instruction	10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function The device meets the requirements, provide the information in the instruction	10.9 Insulation properties	
10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function Image: Compatibility of the temperature rise calculation in the instruction	10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.10 Temperature riseThe panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.13 Mechanical functionThe device meets the requirements, provide the information in the instruction	10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function Image: Compatibility of the switchgear must be observed.	10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.13 Mechanical function Image: Compatibility observed observed.	10.10 Temperature rise	
10.13 Mechanical function The device meets the requirements, provided the information in the instruction	10.11 Short-circuit rating	
	10.12 Electromagnetic compatibility	
	10.13 Mechanical function	

Technical data ETIM 7.0

Circuit breakers and fuses (EG000020) / Miniature circuit breaker (MCB) (EC000042)


Electric engineering, automation, process control engineering / Electrical installation, device / Miniature circuit breaker system (MCB) / Miniature circuit breaker (MCB) (ecl@ss10.0.1-27-14-19-01 [AAB905014])


(ecl@ss10.0.1-27-14-19-01 [AAB905014])			
Release characteristic			Z
Number of poles (total)			1
Number of protected poles			1
Rated current	ł	A	10
Rated voltage	١	V	230
Rated insulation voltage Ui	١	V	440
Rated impulse withstand voltage Uimp	k	kV	4
Rated short-circuit breaking capacity Icn EN 60898 at 230 V	k	kA	0
Rated short-circuit breaking capacity Icn EN 60898 at 400 V	k	kA	0
Rated short-circuit breaking capacity Icu IEC 60947-2 at 230 V	k	kA	10
Rated short-circuit breaking capacity Icu IEC 60947-2 at 400 V	k	kA	10
Voltage type			AC
Frequency	ł	Hz	50 - 60
Current limiting class			3
Suitable for flush-mounted installation			No
Concurrently switching N-neutral			No
Over voltage category			3
Pollution degree			2
Additional equipment possible			Yes
Width in number of modular spacings			1
Built-in depth	r	mm	70.5
Degree of protection (IP)			IP20
Ambient temperature during operating	c	°C	-25 - 75
Connectable conductor cross section multi-wired	r	mm²	1 - 25
Connectable conductor cross section solid-core	r	mm²	1 - 25


Approvals

Product Standards	IEC/EN 60947-2; IEC/EN 60898; UL 1077; CSA-C22.2 No. 235; CE marking
UL File No.	E177451
UL Category Control No.	QVNU2, QVNU8
CSA File No.	204453
CSA Class No.	3215-30
North America Certification	UL recognized, CSA certified
Conditions of Acceptability	Supplementary Protector only
Suitable for	Branch Circuits; not as BCPD
Current Limiting Circuit-Breaker	No
Max. Voltage Rating	277 VAC; 48 VDC
Degree of Protection	IEC: IP20; UL/CSA Type: -


Characteristics

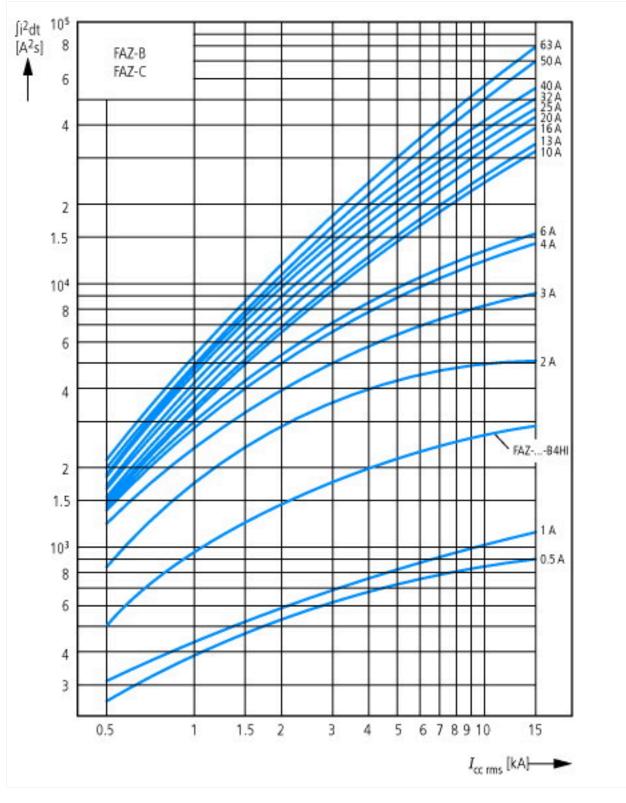

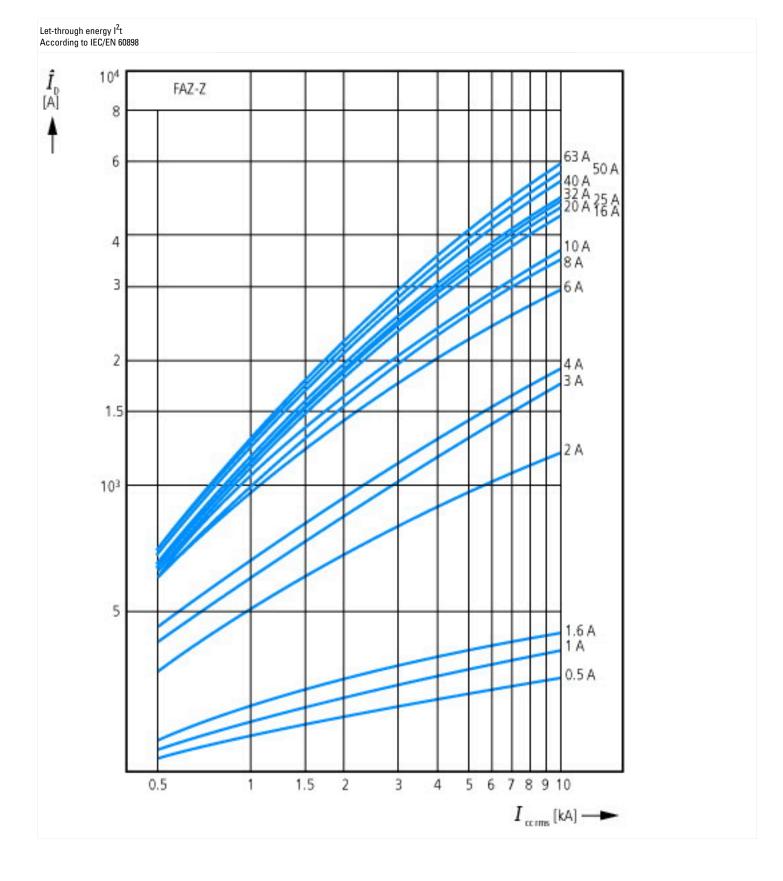

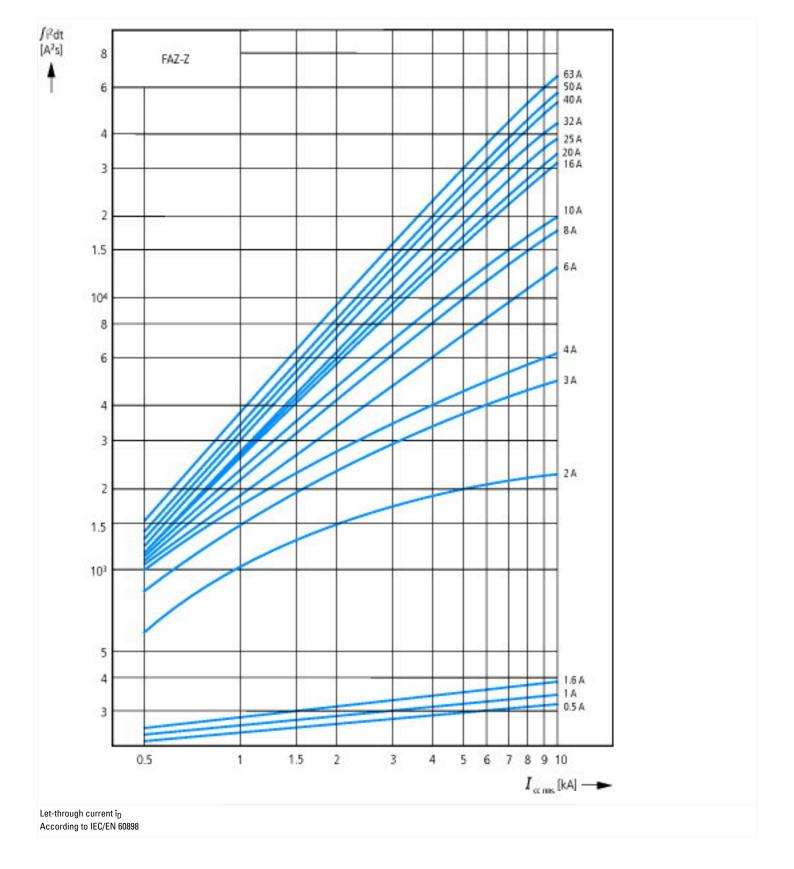



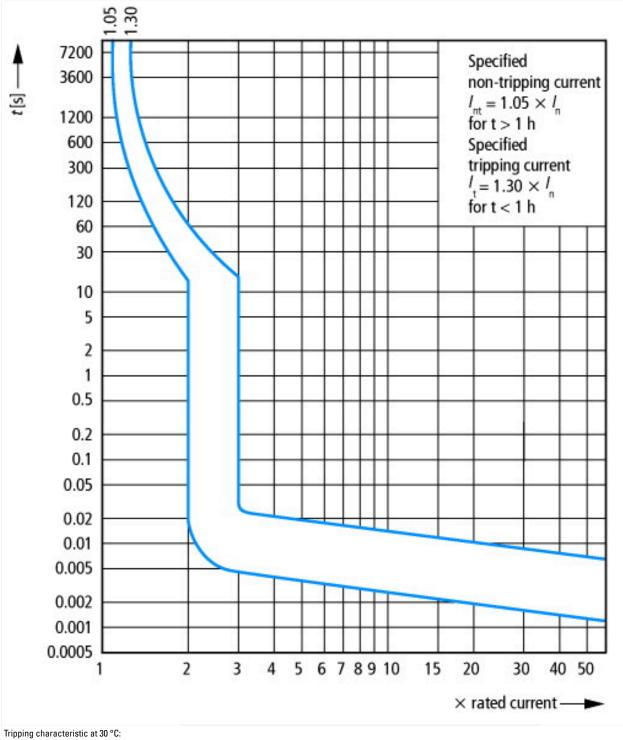

03/07/2019



