

theLuxa P300 KNX WH

Article number: 1019610

## Description




- \*Available october 2015\*
- Motion detector (PIR)
- Automatic lighting control based on presence and brightness
- For integration into KNX building systems
- For outdoor use
- For installation on walls and ceilings
- Integrated temperature sensor
- For larger, commercial outdoors properties such as offices, public buildings, hotels, schools, car parks and warehouses
- Easy to program with KNX ETS software
- Adjustable brightness switching value and switch-off delay
- Sensitivity can be reduced
- Area limit via lens attachment
- Mixed light measurement
- Teach-in of current brightness value possible
- Pulse function
- Test function for checking detection area
- Installation on flush-mounted socket possible (60 mm)
- Single-handed plug-in installation
- Instant start-up possible via factory preset
- Controls are place protected
- Corner angle included
- Spacer and corner angle included

## Technical data



Operating voltage KNX	Bus voltage, <10 mA
Setting range brightness	1 – 3000 lx
Detection angle	300°
Creep under protection	Ø 6 m
Installation type	Wall and ceiling installation
Light switch-off delay	1 s - 60 min
Light measurement	Mixed light measurement
Ambient temperature	-25 °C ... +45 °C
Protection class	III
Type of protection	IP 55

## Detection range

Mounting height (A)	Head on to (r)	Diagonally (t)
2,5 m	5 m	16 m

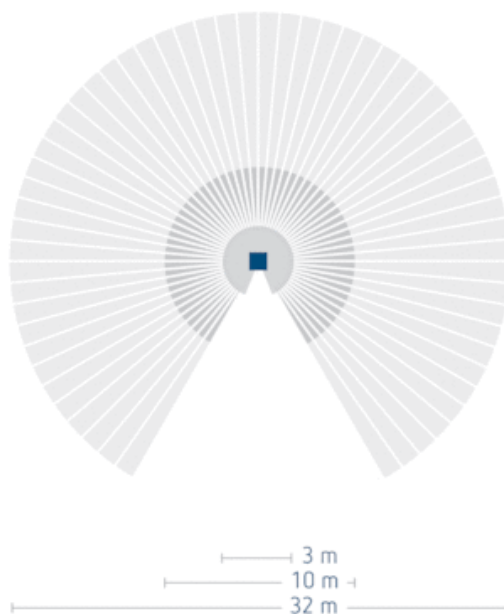


## Scale drawings

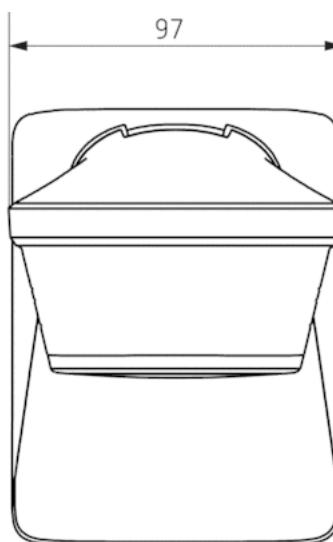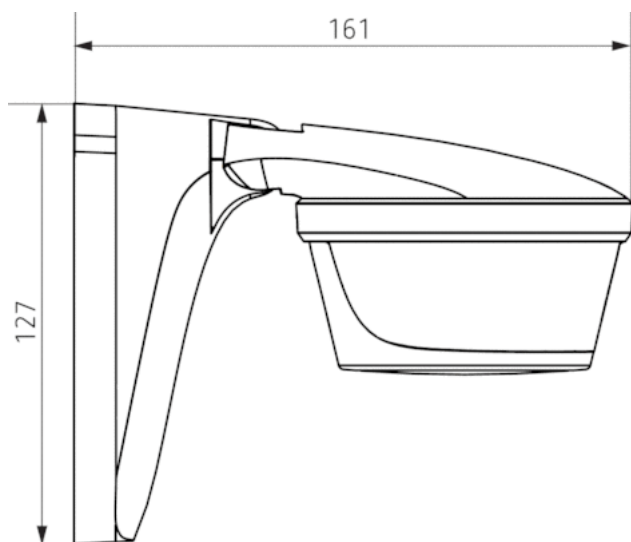

## Accessories

### Corner angle theLuxa P WH

- Article number: 9070904  
Details ► [www.theben.de](http://www.theben.de)



### Spacer theLuxa P WH

- Article number: 9070908  
Details ► [www.theben.de](http://www.theben.de)



### theSenda P

- Article number: 9070910  
Details ► [www.theben.de](http://www.theben.de)



Article number: 1019610

## theSenda S

- Article number: 9070911  
[Details](#) ▶ [www.theben.de](http://www.theben.de)

