

Transmitter for Analog Current Signals Type G 3210 1161



- AnaLink transmitter with 4 to 20 mA input
- 8-bit resolution
- Optical isolation
- Uses only 1 channel
- Channel coding by GAP 1605
- Supplied by Dupline® and current signal
- H2-housing
- For mounting on DIN-rail in accordance with EN 50022

Product Description

Dupline® Analink transmitter with 4 to 20 mA input. Converts the 4 to 20 mA input signal to an 8-bit binary value, which is transmitted to the controller G 3890 0030 230. In this unit the analog values can

be scaled, logged and printed out and/or read from a PC. The 4 to 20 mA signal must be able to supply a voltage drop of 6 V, since the analog part of the transmitter is supplied by the input signal.

Ordering Key

G 3210 1161

Type: Dupline®
Type _____

Type Selection

Supply	Ordering no. 1 channel 4 to 20 mA
By Dupline® and current signal	G 3210 1161

Supply Specifications

Current consumption from Dupline®	< 600 µA
---	----------


Input Specifications

Signal input	4 to 20 mA
Voltage drop	≤ 6 V
Resolution	8-bit (62.5 µA/LSB)
Max. current	100 mA
Inaccuracy (entire temperature range)	≤ 1%
Cable length	≤ 25 m
Dielectric voltage	≥ 2 kV
Response time	256 pulse trains (~ 18 s @ 64 channels)


General Specifications

Channel programming	By GAP 1605
Channel assignment	1 channel, freely programmable
Environment	Degree of protection IP 20 Pollution degree 3 (IEC 60664) Operating temperature 0° to +50°C (+32° to +122°F) Storage temperature -50° to +85°C (-58° to +185°F)
Humidity (non-condensing)	20 to 80% RH
Mechanical resistance	Shock 15 G (11 ms) Vibration 2 G (6 to 55 Hz)
Dimensions	
Material (see "Technical Information")	H2-housing
Weight	90 g

Distance Versus No. of Sensors

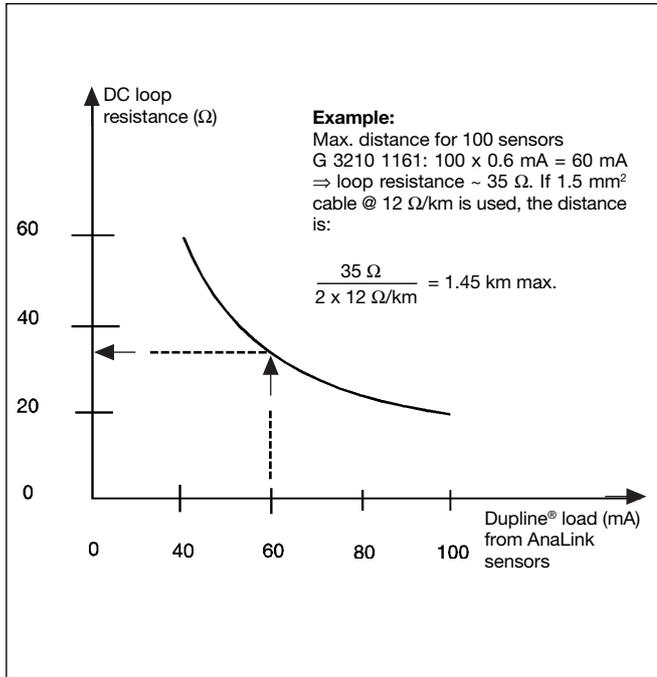

Wiring Diagram

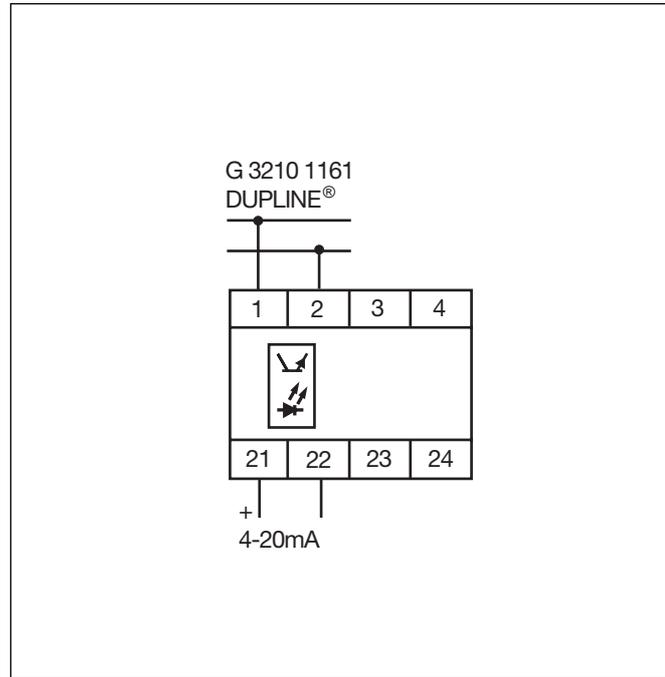

Accessories

DIN-rail

FMD 411

For further information refer to "Accessories".