



## DALI RTC Timer

**Datasheet**

**Control Device**

DALI Real Time Clock with Scheduler

Art. Nr. 86459531  
Art.Nr. 86459531-HS

# DALI RTC Timer Control Device

## Overview

- DALI Real Time Clock
- Time can be set and queried via DALI
- Scheduler Function – up to 28 entries
- Astro-clock function (up from firmware 2.4)
- For each scheduler job weekday mask, time stamp and a DALI command can be defined
- Easy schedule configuration via DALI Cockpit software tool and DALI USB interface
- The DALI RTC module must not be connected to the mains. It is supplied directly via the DALI signal line.
- Battery inside, as factory default the clock is set to local time (GMT+1)
- Simple installation due to DALI double-clamp connector
- Types for backbox installation and dinrail mounting, suitable for installation in protection class II devices



## Specification, Characteristics

type	DALI RTC Timer	
article number	86459531	86459531-HS
<b>DALI-Interface, supply: DA, DA</b>		
input type	DALI, supply	
marking terminals	DA, DA	
input voltage range	9,5Vdc ... 22,5Vdc (acc. to IEC62386)	
max. current consumption DALI	5mA	
number of DALI addresses	1	
<b>insulation data:</b>		
impulse voltage category	II	
pollution degree	2	
rated insulation voltage	250V	
insulation DALI / housing	reinforced isolation	
Insulation test voltage DALI / housing	3000Vac	
<b>environmental conditions::</b>		
storing and transportation temperature	-20°C ... +75°C	
operational ambient temperature	0°C ... +50°C	
rel. humidity, none condensing	15% ... 90%	
<b>general data:</b>		
dimensions (l x w x h)	59mm x 33mm x 15mm	98mm x 17,5mm x 56mm
mounting	back box integration in class II devices	dinrail mounting integration in class II devices


rated max. temperature tc	50°C
expected life time @tc	50.000 h
protection class	II in intended use
protection degree housing	IP40
protection degree terminals	IP20
real time clock (accuracy)	quarz based (~20ppm)

**terminals:**



connection type	spring terminal connector	screw connector
wire size solid core	0,5 ... 1,5 mm <sup>2</sup> (AWG20 ... AWG16)	0,5 ... 2,5 mm <sup>2</sup> (AWG20 ... AWG14)
wire size fine wired	0,5 ... 1,5 mm <sup>2</sup> (AWG20 ...AWG16)	0,5 ... 2,5 mm <sup>2</sup> (AWG20 ...AWG14)
wire size using wire end ferrule	0,25 ... 1 mm <sup>2</sup>	0,25 ... 1,5 mm <sup>2</sup>
stripping length	8,5 ... 9,5 mm / 0,33 ... 0,37 inch	7 mm / 0,27 inch
locking torque	-	0,5Nm
release of wire	push button	open screw

**standards:**

EMC	EN 61547 EN 50015 / IEC CISPR15	
safety	EN 61347-2-11 EN 61347-1	
markings	CE	CE

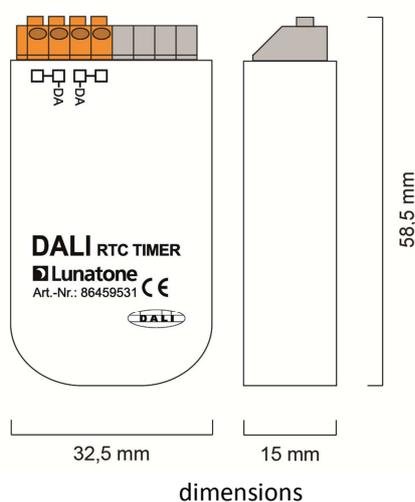

connection plan

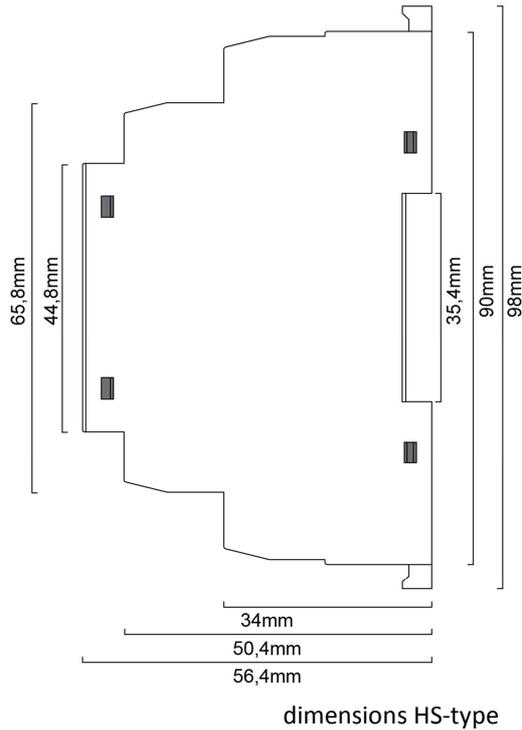

dimensions HS-type

## Installation


- The DALI RTC Timer is intended for back box installation or integration in protection class II devices, the HS-type is suited for dinrail mounting, ensure protection against electric shock by an appropriate enclosure
- Wiring as fixed installation in a dry and clean environment
- Installation only by qualified person when no voltage is applied
- Attend regulations regarding electrical installations of national authorities
- The DALI RTC Timer is powered by the DALI line (typical current consumption 5 mA), no separate power supply needed
- the connection to the DALI-line is polarity free
- DALI-line wiring with standard low voltage installation material
- The DALI-interface can handle mains voltage, protecting the device in case of wrong wiring
- Wiring topology of the DALI-line: Line, Tree, Star
- Connect only one wire on each terminal, if twin ferrules are used take care to the maximum wire size



**HINT:** The DALI-signal is not classified as SELV circuit. Therefore the standards for installation in low voltage system apply.




The voltage drop on the DALI-line shall not exceed 2V.

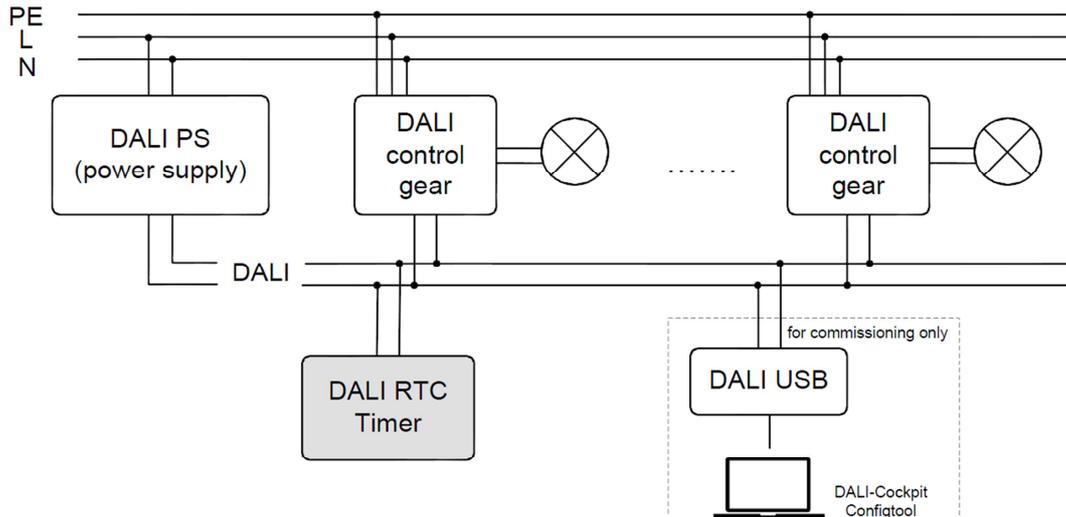

typical application

## Commissioning

- After installation the DALI RTC Timer is ready for use
- The configuration can be done with the help of the DALI-Cockpit software (interface module to DALI-line required, e.g. DALI USB, DALI SCI RS232, DALI4Net)
- The DALI RTC Timer is automatically detected during the addressing procedure and is then shown in the component tree
- The device can be selected – date and time can be set and the scheduler entries can be configured.

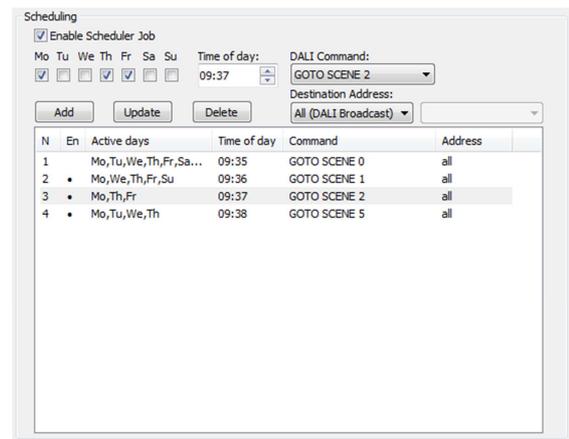


Up from firmware version 2.4 the module supports astrocklock-function, i.e. instead of absolute time a timestamp can be defined relatively to sunset or sunrise. For this function information about the GPS-coordinates in decimal degree format is required.

## Function

The DALI RTC timer sends out DALI commands to the DALI-line based on the entries defined in the scheduler.

In the scheduler up to 28 scheduler jobs can be defined. Each entry consists of status, a weekday mask, a time and finally DALI-command and DALI address.

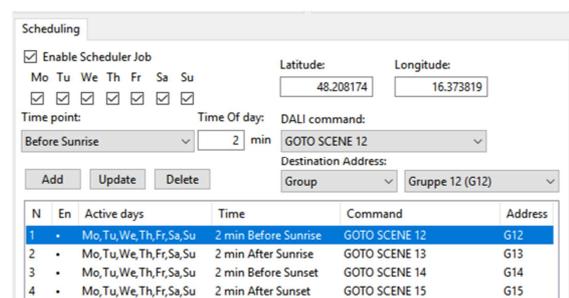

Please note that it is not possible to postpone actions based on sunset/sunrise beyond midnight.

Furthermore date and time can be queried using QUERY SCENE commands:

QUERY SCENE 0 LEVEL: seconds

QUERY SCENE 1 LEVEL: minutes

QUERY SCENE 2 LEVEL: hours

QUERY SCENE 3 LEVEL: day of month

QUERY SCENE 4 LEVEL: month

QUERY SCENE 5 LEVEL: year-2000

## Purchase Information

**Art.Nr. 86459531:** DALI RTC Timer, DALI Real Time Clock with Scheduler Function, back box installation and class II device integration

**Art.Nr. 86459531-HS:** DALI RTC Timer, DALI Real Time Clock with Scheduler Function, dinrail mounting, built-in

## Additional Information and Equipment

Lunatone datasheets and manuals  
<http://lunatone.at/en/downloads/>

Lunatone DALI products  
<http://www.lunatone.at/en/>

## Contact

Technical Support: [support@lunatone.com](mailto:support@lunatone.com)

Requests: [sales@lunatone.com](mailto:sales@lunatone.com)

[www.lunatone.com](http://www.lunatone.com)



## Disclaimer

Subject to change. Information provided without guarantee.  
The datasheet refers to the current delivery.

The compatibility with other devices must be tested in advance to the installation.