


# Sense Driver for 4000lm



Article code: **5046 820081**  
EAN: 7021988200810



## Light technic

Version: Driver for 4000lm  
Wattage: 33W  
System wattage: 33.0W  
Voltage: 230V  
Lifetime: 50,000

## Control/Dimming

Type: On/Off  
Driver: 1050mA (800-1050mA) 25-42V 4000

## Protection

Luminaire class: Class II  
Ingress protection rating: IP20  
Ta nominel: Tc=80°C

## Energy and approvals

Approval: CE

## Materials and finish

Housing: Plastic

## Mounting/Connection

Mounting: Surface, Indoor  
Plug: Includes plug  
Max. luminaires per circuit breaker: B10: 16, B16: 25, C10: 24, C16: 37

## Dimensions (mm)


Length (L): 119  
Width (W): 53  
Height (H): 30  
Weight (brutto/netto): 0.592 / 0.392

## Packaging

Packing dimensions: 400 x 45 x 10



SENSE 1050mA /4000lm DRIVER NON DIM

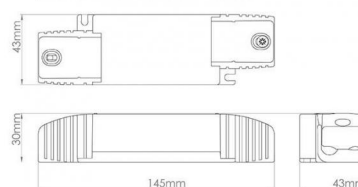

Sense Panels & Driver Kits									
	CU (Kv)	CU-M (Steps)	BA (°)	SENSE 3000lm DRIVER KIT PHASE DIM (700mA)	SENSE 4000lm DRIVER KIT NON DIM (1000mA)	SENSE 5000lm DRIVER KIT NON DIM (1400mA)	SENSE 3000lm DRIVER KIT DALI (1000mA)	SENSE 4000lm DRIVER KIT DALI (1400mA)	SENSE 5000lm DRIVER KIT DALI (1400mA)
SENSE OPAL 3-4000lm LED 3000K	80	3	110	2750lm/UCR-22 27W/1200mA/W	4000lm/UCR-22 31.2W/1275mA/W	x	2750lm/UCR-22 27W/1200mA/W	4000lm/UCR-22 31.2W/1275mA/W	x
SENSE OPAL 3-4000lm LED 4000K	80	3	110	2650lm/UCR-22 27W/1200mA/W	4000lm/UCR-22 31.2W/1275mA/W	x	2750lm/UCR-22 27W/1200mA/W	4000lm/UCR-22 31.2W/1275mA/W	x
SENSE OPAL 3000lm LED 3000K	80	3	110	2650lm/UCR-22 27W/1200mA/W	3900lm/UCR-22 31.2W/1275mA/W	5000lm/UCR-22 42W/1180mA/W	2650lm/UCR-22 27W/1200mA/W	3900lm/UCR-22 31.2W/1275mA/W	5000lm/UCR-22 42W/1180mA/W
SENSE OPAL 3000lm LED 4000K	80	3	110	2750lm/UCR-22 31W/1311mA/W	4000lm/UCR-22 31.2W/1275mA/W	5000lm/UCR-22 42W/1180mA/W	2750lm/UCR-22 31W/1311mA/W	4000lm/UCR-22 31.2W/1275mA/W	5000lm/UCR-22 42W/1180mA/W
SENSE PRIMA 3-4000lm LED 3000K	80	3	90	2650lm/UCR-17 27W/1200mA/W	3900lm/UCR-19 31.2W/1275mA/W	x	2650lm/UCR-17 27W/1200mA/W	3900lm/UCR-19 31.2W/1275mA/W	x
SENSE PRIMA 3-4000lm LED 4000K	80	3	90	2750lm/UCR-17 27W/1200mA/W	4000lm/UCR-19 31.2W/1275mA/W	x	2750lm/UCR-17 27W/1200mA/W	4000lm/UCR-19 31.2W/1275mA/W	x
SENSE PRIMA 1000lm LED 3000K	80	3	90	2650lm/UCR-17 27W/1200mA/W	3750lm/UCR-17 31.2W/1275mA/W	4000lm/UCR-19 42W/1180mA/W	2650lm/UCR-17 27W/1200mA/W	3750lm/UCR-17 31.2W/1275mA/W	4000lm/UCR-19 42W/1180mA/W
SENSE PRIMA 1000lm LED 4000K	80	3	90	2750lm/UCR-17 27W/1200mA/W	3750lm/UCR-17 31.2W/1275mA/W	4000lm/UCR-19 42W/1180mA/W	2750lm/UCR-17 27W/1200mA/W	3750lm/UCR-17 31.2W/1275mA/W	4000lm/UCR-19 42W/1180mA/W

Notes: efficiency calculations are not driver  
incl. driver: 7-14% loss depending on driver

b



7 0 2 1 9 8 8 2 0 0 8 1 0