


Product Environmental Profile

Family technical name: PN 750V

Reference product name: PN 750V 2,5 Blå SN100



91

kg CO₂ eq.

Climate change - total



0,02868

kg Sb eq.

Resource use - minerals
& metals (ADPe)



5,0

m³

Net use of fresh water



2402

MJ

Total Primary Energy

The above environmental impacts are "cradle to gate" or "Manufacturing phase" values (A1-A3)

PEP ecopassport N°:	NXNS-00296-V01.01-EN	Product Category Rules:	PEP-PCR-ed4-EN-2021 09 06
		Product Specific Rules:	PSR-0001-ed4-EN-2022 11 16
		Program information & documents:	www.pep-ecopassport.org
Verifier accreditation N°:	VH08		
Date of publication:	06-2023	Validity period:	5 years
Independent verification of the declaration and data, in accordance with ISO 14025 : 2006			
Internal ☐ External ☒			
The PCR critical review was conducted by a panel of experts chaired by Julie Orgelet (Ddmain).			
PEP are compliant with XP C08-100-1 :2016 or EN 50693			
The elements of the present PEP cannot be compared with elements from another program.			
Compliant with ISO 14025: 2006 "Environmental labels and declarations - Type III environmental declarations".			



REALIZED BY:

Morten Aamodt
Regnbueveien 7, 1405 Langhus
firmapost@nexans.com

☎ +4764861800

<https://www.nexans.com/csr.html>



Nexans Corporate Social Responsibility commitment

Corporate Social Responsibility which is the confluence between environmental, economic and social aspects, is an integral part of the Nexans's strategy. Nexans has been supporting the **United Nations Global Compact** since December 2008 and has implemented internal action plans to integrate Sustainable Development at all levels. It includes responsible governance, healthy and safe working environment for employees, reduced global carbon footprint through the **Nexans Carbon Neutrality strategy**.



Reference Product description

PN 750V 2,5 Bl& SN100

Plastic insulated connection wire with stranded, annealed copper conductor.

Products covered:

The aforementioned products belong to the category Wires, Cables and Accessories of the Product Category Rules (PCR) from the PEP ecopassport® program.


The PEP concern all the products in the range PN 750V and the reference product of the PEP is PN 750V 2,5 Bl& SN100.

Functional unit:

To transmit energy expressed for 1A over a distance of 1km during 30 years and a 70% use rate, in accordance with the relevant standards, detailed in the data sheet available on our website www.nexans.com.

Lifetime and use rate correspond to the Building - Residential / Tertiary / Industrial application as defined in the table given in Appendix 1 of the specific rules for wires, cables and accessories.

Constituent materials

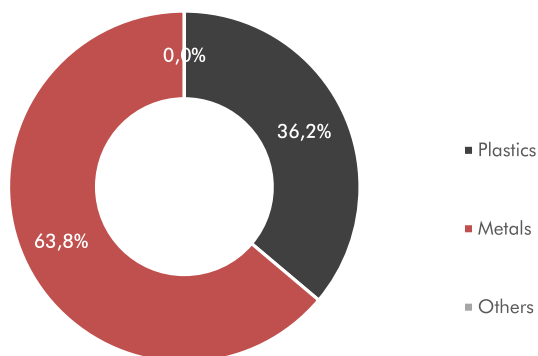

The total mass of the reference product and packaging is 33,31kg/km. Constituent materials are distributed as given in the graph.

Nexans has implemented necessary procedures to ensure product compliance with the relevant standards when products are put on the market.



Manufacturing



- All the products in the range PN 750V are manufactured in Norway.
- The electricity mix model for the manufacturing stage is from Norway, ≤ 1 kV.
- All Nexans sites in Norway have implemented a certified Environmental Management System according to ISO14001 standard.

Packaging designed to reduce environmental impacts:

- Packaging was designed according to the applicable standard (Directive 94/62/EC).
- The packaging considered to transport the reference product is a Other. It is considered to be used 1 time.

Distribution



The transportation scenario for the impact assessment of the distribution stage is local, considering:

- 1000 km covered by truck.

Installation



Installation processes for the reference product are considered out of the scope of the study, according to the Product Specific Rules document for "Wires, Cables and Accessories" from PEP ecopassport® program. Only 5% of product losses and packaging disposal is considered in this stage

Use



The use scenario considers the operation of the reference product in Building - Residential / Tertiary / Industrial, with:

- Reference Lifetime (RLT) = 30 years
- Use rate = 70 %

Considering the aforementioned hypotheses, the energy consumption over the RLT at use stage is 1363,14 kWh/km.

This value is calculated for $I=1$ A. For the effective consumption of the cable installed, multiply the value given by the square of intensity.

- The electricity mix considered at use stage is Norway, ≤ 1 kV.
- No maintenance is necessary to ensure the operation of the cable during the considered reference lifetime.

The reference lifetime mentioned in this PEP corresponds to an average data used for impact calculation, taking into account the average time a cable might be installed in a system before being disposed. It CANNOT BE considered as an equivalent to the guaranteed product technical lifetime.

End-of-life



- The transportation scenario chosen for the impact analysis associated with end-of-life stage is 1000 km covered by truck.
- The assumed electricity mix model for end-of-life stage is Norway, > 1 kV.

The cables are recycled through a grinding process for the separation of polymers and metal parts. The separated materials are then assumed to be recycled, incinerated or landfilled.

If the customer wants to recycle their cables at the end-of-life, Nexans has the know-how of cables recycling at their end-of-life through the structure named Nexans Recycling Services (recycling.services@nexans.com), to offer a complete solution for the recycling of polymers and metals.



III. ENVIRONMENTAL IMPACTS

The reference product PN 750V 2,5 Blå SN100 belongs to the Product Category Rules (PEP-PCR-ed4-EN-2021 09 06) and Product Specific Rules (PSR-0001-ed4-EN-2022 11 16) from the PEP ecopassport® program. According to the PCR, the life cycle impact assessment of the reference product takes into account manufacturing, distribution, installation, use and end-of-life stages.

All the necessary hypotheses to evaluate the environmental impacts of the reference product lifecycle are presented in the previous sections (electricity mix models, use scenario, etc). The software used to perform the evaluation is EIME 5.9.4, with the Nexans 2022-11 database.

Representativeness: the study is representative of cable production in Norway with a local scenario for distribution. The electricity model for use is Norway, ≤1 kV and the model for end-of-life is Norway, >1 kV.

Impact results for 1000 m of PN 750V 2,5 Blå SN100

Mandatory indicators:

Environmental indicator/flows	Unit	Manufacturing (A1-A3)	Distribution (A4)	Installation* (A5)	Use (B6) (for 1 A)	End-of-life (C1-C4)	TOTAL (for 1 A)
Climate change - total (GWP)	kg CO ₂ eq.	9,12E+01	1,68E+00	4,05E+00	3,98E+01	4,97E+01	1,86E+02
Climate change - fossil (GWPf)	kg CO ₂ eq.	8,52E+01	1,68E+00	3,75E+00	3,24E+01	4,54E+01	1,68E+02
Climate change - biogenic (GWPb)	kg CO ₂ eq.	5,97E+00	0,00E+00	2,92E-01	7,46E+00	4,23E+00	1,80E+01
Climate change - land use & land use change (GWPlu)	kg CO ₂ eq.	8,03E-07	0,00E+00	0,00E+00	0,00E+00	6,97E-05	7,05E-05
Ozone layer depletion (ODP)	kg CFC-11 eq.	2,44E-05	2,57E-09	1,22E-06	3,34E-08	3,12E-06	2,88E-05
Acidification potential of soil and water (AP)	mol H+ eq.	3,96E+00	1,06E-02	1,86E-01	4,58E-02	5,59E-01	4,76E+00
Eutrophication - freshwater (Epf)	kg PO ₄₃ - eq.	2,58E-03	6,30E-07	3,98E-05	3,02E-06	1,49E-01	1,51E-01
Eutrophication - marine (Epm)	kg N eq.	1,32E-01	4,98E-03	3,74E-03	1,14E-02	8,58E-02	2,38E-01
Eutrophication - terrestrial (Ept)	mol N eq.	1,50E+00	5,47E-02	4,32E-02	1,25E-01	1,07E+00	2,79E+00
Photochemical ozone formation - human health (POCP)	kg NMVOC eq.	6,67E-01	1,38E-02	2,51E-02	3,41E-02	2,52E-01	9,92E-01
Resource use - minerals & metals (ADPe)	kg Sb eq.	2,87E-02	6,61E-08	1,43E-03	2,75E-04	4,18E-03	3,46E-02
Resource use - fossils (ADPf)	MJ	2,26E+03	2,34E+01	1,03E+02	2,77E+02	5,01E+02	3,16E+03
Water use (WU)	m3 eq.	2,16E+02	6,37E-03	1,06E+01	4,31E+02	1,28E+02	7,85E+02
Use of renewable primary energy excluding renewable primary energy used as raw material (PERE)	MJ	1,47E+02	3,12E-02	7,22E+00	6,40E+03	1,31E+02	6,68E+03
Use of renewable primary energy used as raw material (PERM)	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of renewable primary energy resources (PERT)	MJ	1,47E+02	3,12E-02	7,22E+00	6,40E+03	1,31E+02	6,68E+03
Non-renewable primary energy excluding non-renewable primary energy resources used as raw materials (PENRE)	MJ	1,98E+03	2,34E+01	9,22E+01	2,77E+02	5,01E+02	2,88E+03
Use of non renewable primary energy resources used as raw materials (PENRM)	MJ	2,73E+02	0,00E+00	1,08E+01	0,00E+00	0,00E+00	2,84E+02
Total use of non-renewable primary energy resources (PENRT)	MJ	2,26E+03	2,34E+01	1,03E+02	2,77E+02	5,01E+02	3,16E+03
Use of secondary material (SM)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of renewable secondary fuels (RSF)	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of non renewable secondary fuels (NRSF)	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Net use of fresh water (FW)	m3	5,02E+00	1,48E-04	2,46E-01	1,00E+01	2,98E+00	1,83E+01
Hazardous waste disposed (HWD)	kg	2,63E+03	0,00E+00	1,33E+02	1,07E+00	7,32E-01	2,77E+03
Non hazardous waste disposed (NHWD)	kg	5,11E+00	5,89E-02	2,31E-01	8,57E+01	1,67E+01	1,08E+02
Radioactive waste disposed	kg	4,23E-03	4,20E-05	2,02E-04	4,99E-02	3,24E-03	5,76E-02
Components for reuse (CRU)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling (MFR)	kg	4,53E-01	0,00E+00	9,06E-03	0,00E+00	2,36E+01	2,40E+01
Materials for energy recovery (MER)	kg	1,48E-01	0,00E+00	1,46E-03	0,00E+00	4,58E+00	4,73E+00
Exported Energy (EE)	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Biogenic carbon content - product (BC-pro)	kg of C	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Biogenic carbon content - packaging (BC-pack)	kg of C	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

* Installation stage includes only packaging disposal. Impacts related to installation processes might be completed by the PEP user.

Optional indicators:

Environmental indicator/flow	Unit	Manufacturing (A1-A3)	Distribution (A4)	Installation* (A5)	Use (B6) (for 1 A)	End-of-life (C1-C4)	TOTAL (for 1 A)
Total Primary Energy (TPE)	MJ	2,40E+03	2,34E+01	1,10E+02	6,67E+03	6,32E+02	9,84E+03
EF-particulate matter (EF-PM)	Disease occurrence	2,38E-05	8,64E-08	1,12E-06	4,57E-07	2,84E-06	2,83E-05
Ionising radiation, human health (IR)	kg U235 eq.	6,33E+03	4,09E-03	3,15E+02	4,90E+00	7,19E+00	6,66E+03
Ecotoxicity, freshwater (Eco-fw)	CTUe	1,95E+03	1,13E+00	8,80E+01	8,47E+01	1,52E+04	1,73E+04
Human toxicity, cancer (HT-c)	CTUh-c	4,02E-04	2,95E-11	2,01E-05	2,07E-09	1,72E-07	4,22E-04
Human toxicity, non-cancer (HT-nc)	CTUh-nc	4,95E-05	3,19E-09	2,47E-06	1,40E-07	1,01E-05	6,22E-05
Land use (LU)	No dimension	1,92E+01	0,00E+00	6,99E-01	2,22E+00	4,01E+02	4,23E+02



V. EXTRAPOLATION RULES FOR THE PRODUCT FAMILY PN 750V

General information

The extrapolation rules have been calculated based on the environment impact assessment results of 3 products in the range PN 750V. The reference product is PN 750V 2,5 Bl8 SN100. The weight of reference product is 32 kg/km.

The reference product has 1 active conductor(s) and a resistivity of 7,41 ohm/km/active conductor.

The extrapolation rules below apply to 1000m of product. In the following sections, the product weight is expressed in kg for 1000m of cable, where applicable.

Extrapolation rules for each life cycle stage

	Life cycle stage	Applicable extrapolation principle	Formula to calculate each environmental indicator	Example: If the product weight is 42 kg/km, each indicator value shall be calculated with:	Mean deviation of extrapolation rule
	Manufacturing	Linear variation versus weight	Indicator = a x Cable weight + b	Indicator = (42 x a) + b	11,84%
	Distribution	Linear variation versus weight	Indicator = a x Cable weight + b	Indicator = 42 x a + b.	0,53%
	Installation	Linear variation versus weight	Indicator = a x Cable weight + b	Indicator = 42 x a + b.	3,01%
	Use	Variation versus resistivity ratio	Indicator = (Product Resistivity / Reference product Resistivity) x (Nb of active conductors / Nb of active conductors in the reference product) x Indicator value for Reference Product	Example: If the product resistivity is 1,2 ohm/km & has 1 active conductor, Indicator = (1,2/7,41) x (1/1) x indicator of reference product.	0,00%
	End of life	Linear variation versus weight	Indicator = a x Cable weight + b	Indicator = (42 x a) + b	1,83%

Table to be considered for extrapolation calculations of different life cycle stages:

	Manufacturing				Distribution		Installation		End of life	
	a	b	a	b	a	b	a	b	a	b
GWP	3,09E+00	-6,67E+00	-	-	5,43E-02	-4,67E-02	1,32E-01	-1,48E-01	1,69E+00	-4,04E+00
GWPF	2,88E+00	-5,96E+00	-	-	5,43E-02	-4,67E-02	1,22E-01	-1,26E-01	1,52E+00	-3,03E+00
GWpb	2,12E-01	-7,06E-01	-	-	0,00E+00	0,00E+00	9,90E-03	-2,18E-02	1,68E-01	-1,01E+00
GWPlu	1,61E-07	-3,58E-06	-	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,78E-06	-1,69E-05
ODP	7,50E-07	2,91E-07	-	-	8,32E-11	-7,16E-11	3,72E-08	2,09E-08	1,15E-07	-5,04E-07
AP	1,64E-01	-1,10E+00	-	-	3,44E-04	-2,96E-04	7,64E-03	-5,06E-02	2,20E-02	-1,26E-01
EpF	3,61E-04	-7,36E-03	-	-	2,04E-08	-1,75E-08	6,54E-07	1,60E-05	5,93E-03	-3,60E-02
Epm	5,10E-03	-2,64E-02	-	-	1,61E-04	-1,39E-04	1,37E-04	-5,47E-04	3,32E-03	-1,78E-02
Ept	5,80E-02	-3,08E-01	-	-	1,77E-03	-1,52E-03	1,59E-03	-6,63E-03	4,16E-02	-2,26E-01
POCP	2,57E-02	-1,34E-01	-	-	4,46E-04	-3,83E-04	9,44E-04	-4,41E-03	9,74E-03	-5,17E-02
ADPe	1,21E-03	-8,55E-03	-	-	2,14E-09	-1,84E-09	5,98E-05	-4,17E-04	1,67E-04	-1,02E-03
ADPf	6,32E+01	1,99E+02	-	-	7,57E-01	-6,52E-01	2,68E+00	1,45E+01	1,89E+01	-8,97E+01
WU	8,07E+00	-3,67E+01	-	-	2,06E-04	-1,77E-04	3,85E-01	-1,50E+00	4,64E+00	-1,82E+01
PÉRE	4,96E+00	-1,04E+01	-	-	1,01E-03	-8,70E-04	2,32E-01	-2,06E-01	4,93E+00	-2,30E+01
PERM	0,00E+00	0,00E+00	-	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	4,96E+00	-1,04E+01	-	-	1,01E-03	-8,70E-04	2,32E-01	-2,06E-01	4,93E+00	-2,30E+01
PENRE	5,68E+01	1,37E+02	-	-	7,57E-01	-6,52E-01	2,53E+00	9,43E+00	1,89E+01	-8,97E+01
PENRM	6,33E+00	6,21E+01	-	-	0,00E+00	0,00E+00	1,50E-01	5,10E+00	0,00E+00	0,00E+00
PENRT	6,32E+01	1,99E+02	-	-	7,57E-01	-6,52E-01	2,68E+00	1,45E+01	1,89E+01	-8,97E+01
SM	0,00E+00	0,00E+00	-	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	0,00E+00	0,00E+00	-	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	0,00E+00	0,00E+00	-	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	1,88E-01	-8,55E-01	-	-	4,80E-06	-4,13E-06	8,96E-03	-3,50E-02	1,08E-01	-4,24E-01
HWD	1,10E+02	-7,66E+02	-	-	0,00E+00	0,00E+00	5,58E+00	-3,92E+01	2,56E-02	-7,75E-02
NHWD	1,81E-01	-6,15E-01	-	-	1,91E-03	-1,64E-03	8,54E-03	-3,65E-02	2,57E-01	7,18E+00
RWD	1,70E-04	-1,06E-03	-	-	1,36E-06	-1,17E-06	8,31E-06	-5,46E-05	5,38E-05	1,29E-03
CRU	0,00E+00	0,00E+00	-	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MFR	5,36E-02	-1,04E+00	-	-	0,00E+00	0,00E+00	3,79E-04	-2,64E-03	8,53E-01	-3,30E+00
MER	5,74E-03	-3,28E-02	-	-	0,00E+00	0,00E+00	6,12E-05	-4,26E-04	8,02E-02	1,71E+00
EE	0,00E+00	0,00E+00	-	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
BC-pro	0,00E+00	0,00E+00	-	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
BC-pack	0,00E+00	0,00E+00	-	-	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
TPE	6,81E+01	1,89E+02	-	-	7,58E-01	-6,53E-01	2,91E+00	1,43E+01	2,38E+01	-1,13E+02
EF-PM	9,79E-07	-6,50E-06	-	-	2,80E-09	-2,41E-09	4,60E-08	-3,02E-07	1,10E-07	-5,99E-07
IR	2,59E+02	-1,69E+03	-	-	1,32E-04	-1,14E-04	1,28E+01	-8,30E+01	2,59E-01	-9,71E-01
Eco-fw	1,04E+02	-1,16E+03	-	-	3,66E-02	-3,15E-02	3,43E+00	-1,89E+01	6,04E+02	-3,63E+03
HT-c	1,68E-05	-1,17E-04	-	-	9,54E-13	-8,22E-13	8,40E-07	-5,85E-06	6,87E-09	-4,15E-08
HT-nc	2,07E-06	-1,46E-05	-	-	1,03E-10	-8,88E-11	1,03E-07	-7,02E-07	4,02E-07	-2,43E-06
LU	1,12E+00	-1,34E+01	-	-	0,00E+00	0,00E+00	9,72E-03	3,29E-01	1,56E+01	-8,58E+01



VI. PRODUCTS COVERED BY THE PEP

The products covered by the given PEP are represented in the below table with a: ●

The below table also provides the maximum linear resistance (ohm/km) of core at 20°C in D.C for 25 wires according to the standard IEC 60228 for each cable included in the cable in the family PN 750V.

Section (mm²)	Resistance (ohm/km)	N° of CONDUCTORS																			
		1	2	3	4	5	6	7	8	9	10	12	14	19	21	24	27	30	37	40	
0,5	36																				
0,75	24,5																				
1	18,1																				
1,5	12,1	●																			
2,5	7,41	●																			
4	4,61	●																			
6	3,08	●																			
10	1,83																				
16	1,15																				
25	0,727																				
35	0,524																				
50	0,387																				
70	0,268																				
95	0,193																				
120	-																				
150	-																				
185	-																				
240	-																				
300	-																				
400	0,0465																				
500	-																				
630	-																				
800	-																				
1000	-																				
1200	-																				
1400	-																				
1600	-																				
1800	-																				
2000	-																				
2500	-																				

For all products covered by this PEP, weight (kg/km) of each product & number of active conductors* in the cable are mentioned in the technical datasheet, which can be obtained from the Nexans website.

*Number of active conductors = total number of conductors - neutral conductor (if applicable). If there is no neutral conductor in the cable, the number of active conductors = total number of conductors. The technical datasheet mentions if there is a neutral or not in a given cable.