

FDV dokumentasjon E 260

E 260	Typebetegnelse	Varenummer	EAN	El.nummer
Elektronisk Impulsrele	ELEKTR.IMPULSRELE E 266-24	2CDE444000R0301	4016779575959	41 889 22
	ELEKTR.IMPULSRELE E 266-230	2CDE144000R0301	4016779575980	41 889 23
	ELEKTR.IMPULSRELE E 266 C-24	2CDE444000R0311	4016779576017	41 889 24
	ELEKTR.IMPULSRELE E 261-24	2CDE441000R0301	4016779575928	41 889 29
	ELEKTR.IMPULSRELE E 262-24	2CDE442000R0301	4016779575935	41 889 30
	ELEKTR.IMPULSRELE E 261-230	2CDE141000R0301	4016779575966	41 889 31
	ELEKTR.IMPULSRELE E 262-230	2CDE142000R0301	4016779575973	41 889 32
	ELEKTR.IMPULSRELE E 261 SRV-230	2CDE111010R0301	4016779576055	41 889 33
	ELEKTR.IMPULSRELE E 261 C-24	2CDE441000R0311	4016779575997	41 889 34
	ELEKTR.IMPULSRELE E 262 C-24	2CDE442000R0311	4016779576000	41 889 35
	ELEKTR.IMPULSRELE E 261 C-230	2CDE141000R0311	4016779576024	41 889 36
	ELEKTR.IMPULSRELE E 262 C-230	2CDE142000R0311	4016779576031	41 889 37
	ELEKTR.IMPULSRELE E 266 C-230	2CDE144000R0311	4016779576048	41 889 99
FDV		Ingen krav til periodisk vedlikehold.		


Tekniske Data

	E 260/E 260 C	E 261 SRV-230
Rated load at 250 V AC	8 A	16 A
Incandescent lamp load	1000 W	1600 W
Fluorescent lamp load in twin-lamp circuit	1000 W	1000 W
Fluorescent lamp load shunt compensated	350 W ①	500 W
Fluorescent lamp load inductive or capacitive	500 W	1000 W
Electronic ballast	I _{on} m 70 A/10 ms ②	I _{on} m 70 A/10 ms ②
Inductive load, cos ϕ = 0.6/230 V ~	5 A	5 A
Contact rating at DC	100 W	100 W
Minimum contact rating	4 V AC/10 mA	4 V AC/10 mA
Contact gap/contact material	0.5 mm/Ag SnO ₂	0.5 mm/Ag SnO ₂
Service life mechanical switchover at 10 ³ /h	> 10 ⁷	> 10 ⁷
Service life at rated load cos ϕ = 1 and 10 ³ /h	> 10 ⁵	> 10 ⁵
Service life with filament lamps at 10 ³ /h	800 W > 10 ⁵ , 1000 W > 0.8x10 ⁵	1000 W > 10 ⁵
Service life at rated load cos ϕ = 0.6 and 10 ³ /h	> 10 ⁴	> 10 ⁴
Max. switching rate	10 ³ /h	10 ³ /h
Bounce time	3 ms	
Connection capacity	2 x 1.5 mm ² with connector sleeve 2 x 2.5 mm ² without connector sleeve	
Tightening torque	0.5 ... 0.8 Nm	0.5 ... 0.8 Nm
ON duration at rated voltage	100 %	100 %
Coil voltage range	0.9 to 1.1 U _n	0.9 to 1.1 U _n
Minimum command time/interval between commands	50/1000 ms	50 ms
Ambient temperature	-20 °C / -4 °F to 50 °C / 122 °F	-20 °C / -4 °F to 50 °C / 122 °F
Control current when controlled locally	230 V AC 115 mA, after 10s 8 mA $\pm$ 20 % 24 V UC 140 mA, after 10s 80 mA $\pm$ 20 %	
Control current when controlled centrally	230 V AC 8 mA, after 10s 3 mA $\pm$ 20 % 24 V UC 17 mA $\pm$ 20 %	
Max. parallel capacity of individual control wire at 230 V ~	0.7 μ F (ca. 2000 m)	
Max. parallel capacity of central control wire at 230 V ~	0.2 μ F (ca. 700 m)	
Max. glow lamp current – parallel to 230 V control buttons	10 mA	10 mA
Max. induced voltage at 230 V control inputs	0.2 U _n	120 V

Latching relays for lamp installations on request.

① E 260 C can not be used with fluorescent lamp load shunt compensated.

② In the case of electronic control gear, take into account a 40-fold inrush current.

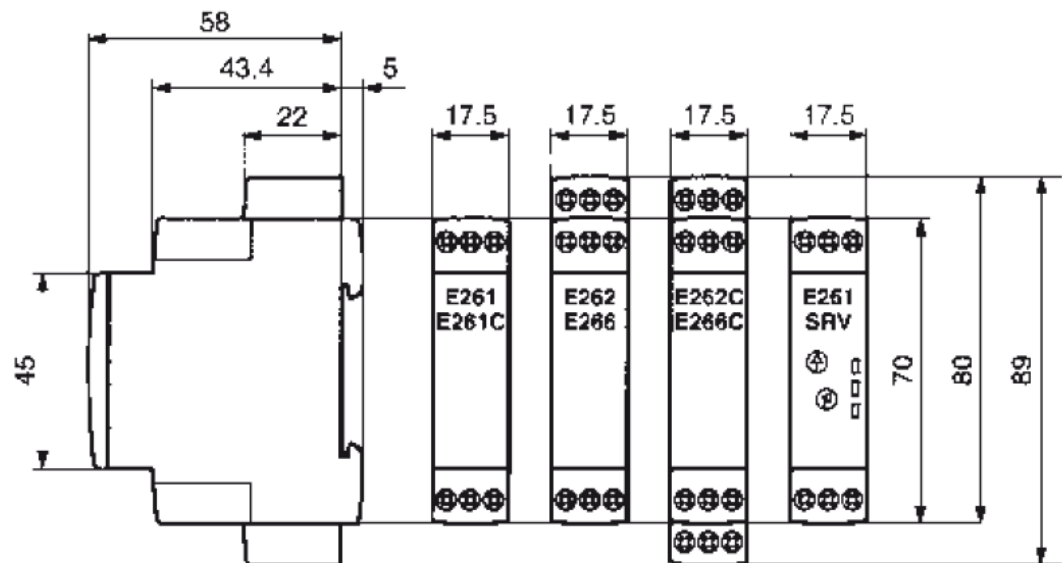

Produsent



Navn

ABB AS

Adresse

Bergerveien 12
1396 Billingstad

Tlf.

03500

E-post

automasjonsprodukter@no.abb.com