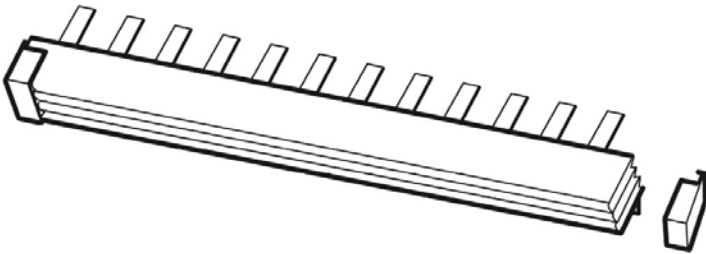


FDV dokumentasjon

Endekapper	Typebetegnelse	Varenummer	EAN	EI.nummer
	Endekappe for 2&3 fas, PS-END Endekappe for 3+N, PS-END1 Endekappe for 1 fas, PS-END 0 Endekappe 1 fas 6mm ² , END1.1	2CDL200001R0001 2CDL200001R0002 2CDL200001R0004 2CDL200011R0011	4016779514729 4016779570114 4016779652261 4016779638913	1665951 1665952 1665953 1665954

FDV		Samleskinnen er produsert og testet i henhold til IEC/EN 60947-1.		Ingen krav til periodisk vedlikehold.																																																																																									
Tekniske Data	<table border="1"> <tr> <td colspan="2"></td> <td colspan="3">Busbars PS</td> </tr> <tr> <td>Suitable for</td> <td></td> <td colspan="3">MCB: S200, S200M, S200P RCD: F200, DDA-blocks</td> </tr> <tr> <td rowspan="5">Electrical Data</td> <td>Standards</td> <td colspan="3">for IEC applications DIN EN 60947-1 VDE 0660 Part 100 – IEC 60947-1:2004</td> </tr> <tr> <td>Approvals</td> <td colspan="3">–</td> </tr> <tr> <td>Rated voltage U_e</td> <td colspan="3">1P, 2P, 3P, 4P: 690 V AC, 690 V DC</td> </tr> <tr> <td>Rated frequency</td> <td>Hz</td> <td colspan="2">50 / 60 Hz, DC</td> </tr> <tr> <td rowspan="3">Current carrying capacity / Phase (35°C ambient temperature)</td> <td>A</td> <td>10 mm²</td> <td>16 mm²</td> <td>30 mm²</td> </tr> <tr> <td>End feeding ①</td> <td>63 A</td> <td>80 A</td> <td>120 A</td> </tr> <tr> <td>Non-and feeding ①</td> <td>100 A</td> <td>130 A</td> <td>160 A</td> </tr> <tr> <td></td> <td>Short-circuit withstand capacity</td> <td>kA</td> <td colspan="2">25 kA in series with fuse NH3 355 A gG 500 V</td> </tr> <tr> <td rowspan="4">Mechanical Data</td> <td>Housing</td> <td colspan="3">light grey, RAL 7035</td> </tr> <tr> <td>Environmental conditions acc. to</td> <td colspan="3">DIN EN 60068</td> </tr> <tr> <td>Overvoltage category</td> <td colspan="3">III</td> </tr> <tr> <td>Pollution degree</td> <td colspan="3">2</td> </tr> <tr> <td rowspan="3">Installation</td> <td>Cross-Section Busbar</td> <td colspan="3">10 mm², 16 mm², 30 mm²</td> </tr> <tr> <td>Mounting position</td> <td colspan="3">optional</td> </tr> <tr> <td>Supply</td> <td colspan="3">Feed on terminal of the device (supply side optional) or use of feeder terminal range AST; SZ-ESK</td> </tr> <tr> <td rowspan="3">Accessories</td> <td>Shock-protection caps</td> <td colspan="3">BSK, SZ-BSK</td> </tr> <tr> <td>Feeder terminals</td> <td colspan="3">range AST, SZ-ESK</td> </tr> <tr> <td>End caps</td> <td colspan="3">range END, PS-END, PSB-END</td> </tr> </table>							Busbars PS			Suitable for		MCB: S200, S200M, S200P RCD: F200, DDA-blocks			Electrical Data	Standards	for IEC applications DIN EN 60947-1 VDE 0660 Part 100 – IEC 60947-1:2004			Approvals	–			Rated voltage U _e	1P, 2P, 3P, 4P: 690 V AC, 690 V DC			Rated frequency	Hz	50 / 60 Hz, DC		Current carrying capacity / Phase (35°C ambient temperature)	A	10 mm ²	16 mm ²	30 mm ²	End feeding ①	63 A	80 A	120 A	Non-and feeding ①	100 A	130 A	160 A		Short-circuit withstand capacity	kA	25 kA in series with fuse NH3 355 A gG 500 V		Mechanical Data	Housing	light grey, RAL 7035			Environmental conditions acc. to	DIN EN 60068			Overvoltage category	III			Pollution degree	2			Installation	Cross-Section Busbar	10 mm ² , 16 mm ² , 30 mm ²			Mounting position	optional			Supply	Feed on terminal of the device (supply side optional) or use of feeder terminal range AST; SZ-ESK			Accessories	Shock-protection caps	BSK, SZ-BSK			Feeder terminals	range AST, SZ-ESK			End caps	range END, PS-END, PSB-END		
			Busbars PS																																																																																										
	Suitable for		MCB: S200, S200M, S200P RCD: F200, DDA-blocks																																																																																										
	Electrical Data	Standards	for IEC applications DIN EN 60947-1 VDE 0660 Part 100 – IEC 60947-1:2004																																																																																										
		Approvals	–																																																																																										
		Rated voltage U _e	1P, 2P, 3P, 4P: 690 V AC, 690 V DC																																																																																										
		Rated frequency	Hz	50 / 60 Hz, DC																																																																																									
		Current carrying capacity / Phase (35°C ambient temperature)	A	10 mm ²	16 mm ²	30 mm ²																																																																																							
	End feeding ①		63 A	80 A	120 A																																																																																								
	Non-and feeding ①		100 A	130 A	160 A																																																																																								
		Short-circuit withstand capacity	kA	25 kA in series with fuse NH3 355 A gG 500 V																																																																																									
	Mechanical Data	Housing	light grey, RAL 7035																																																																																										
		Environmental conditions acc. to	DIN EN 60068																																																																																										
		Overvoltage category	III																																																																																										
		Pollution degree	2																																																																																										
Installation	Cross-Section Busbar	10 mm ² , 16 mm ² , 30 mm ²																																																																																											
	Mounting position	optional																																																																																											
	Supply	Feed on terminal of the device (supply side optional) or use of feeder terminal range AST; SZ-ESK																																																																																											
Accessories	Shock-protection caps	BSK, SZ-BSK																																																																																											
	Feeder terminals	range AST, SZ-ESK																																																																																											
	End caps	range END, PS-END, PSB-END																																																																																											
																																																																																													
Produsent	Navn	Adresse	Tlf.	E-post																																																																																									
	ABB AS	Bergerveien 12 1396 Billingstad	03500	automasjonsprodukter@no.abb.com																																																																																									