


FDV dokumentasjon

Hjelpe-kontakter	Typebetegnelse	Varenummer	EAN	El.nummer
For S280	HJELPEKONTAKT S2-H11, 1NO+1NC HJELPEKONTAKT S2-H21, 2NO+1NC HJELPEKONTAKT S2-H12, 1NO+2NC HJELPEKONTAKT S2-H20, 2NO HJELPEKONTAKT S2-H30, 3NO HJELPEKONTAKT S2-H03, 3NC	GHS2701916R0001 GHS2701936R0001 GHS2701936R0002 GHS2701916R0002 GHS2701936R0003 GHS2701936R0004	4012233615001 4016779013703 4016779013802 4012233615100 4016779013901 4016779014007	1631005 1631006 1631007 1631008 1631010 1631011

FDV	.	Ingen krav til periodisk vedlikehold.
-----	---	---------------------------------------

Tekniske Data	Type	S2-H11 I S2-H11 X	S2-H20 I S2-H20 X	S2-H02 I S2-H02 X	S2-H21	S2-H12	S2-H30	S2-H03
	Description	1NO+1NC	2NO	2NC	2NO+1NC	1NO+2NC	3NO	3NC
	Alternating current	Ue [V] Ie [A]			240 415 6 2			
	Direct current	Ue [V] Ie [A]		24 60 110 250 4 2 1.5 1				
	Min. operating voltage	[V]			12 a.c.-12 d.c.			
	Min. operating current	[mA]			12			
	Terminals	[mm ²]			up to 2x1.5			
	Dielectric strength	[kV]			3			
	Resistance to short-circuit at 240 V a.c.	[A]		1000 (protected with S 2 breaker characteristic K - 6 A)				
	Impulse voltage withstand capacity	[kV]			4			
	Tightening torque	[Nm]			0.7			
	Dimensions (WxDxH)	[mm]			8.75x68x90			
	NB: the auxiliary contacts S2-H11 X, S2-H20 X, S2-H02 X differ from the contacts S2-H11, S2-H20, S2-H02 in that they do not have a terminal to tighten the cable which is replaced by a bayonet for the Faston connection.							

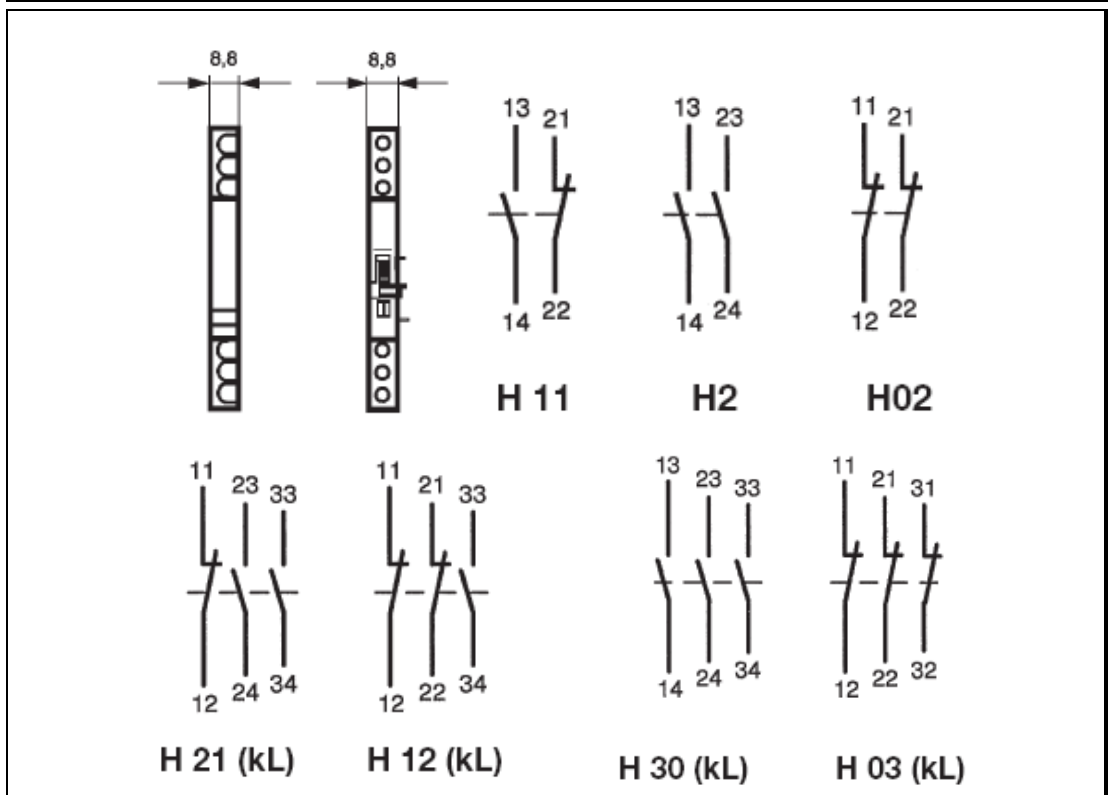

Produsent	Navn	Adresse	Tlf.	E-post
	ABB AS	Bergerveien 12 1396 Billingstad	03500	automasjonsprodukter@no.abb.com