



Contact element, 1 N/C, front mount, 6. contact, screw connection

Part no.

 Article no.

 Catalog No.

M22-K01


 216378

 M22-K01Q

Delivery program


Product range		RMQ-Titan (drilling dimensions 22.5 mm)
Basic function		Accessories
Standard/Approval		UL/CSA, IEC
Construction size		NZM1/2/3/4
Single unit/Complete unit		Element
Basic function accessories		Contact elements
Connection technique		Screw terminals
Fixing		Front fixing


Contacts

N/C = Normally closed		1 NC 
Notes		 = safety function, by positive opening to IEC/EN 60947-5-1

Actuator travel and actuation force as per DIN EN 60947-5-1, K.5.4.1

	mm	4.8
Maximum travel	mm	5.7
Minimum force for positive opening	N	15

Contact sequence		
------------------	--	--




Contact travel diagram, stroke in connection with front element		
---	--	--

Configuration		<div> <div>1 / 4</div> <div>3 / 6</div> <div>2 / 5</div> </div>
---------------	--	---

Degree of Protection			IP20
Connection to SmartWire-DT			no
Connection type			Single contact
Description of HIA trip-indicating auxiliary contact			<p>General trip indication '+', when tripped by shunt release, overload release, short-circuit release or by the residual-current release due to residual-current.</p> <p>Can be used with NZM1, 2, 3 circuit-breaker: a trip-indicating auxiliary contact can be clipped into the circuit-breaker.</p> <p>Can be used with NZM4 circuit-breaker: up to two standard auxiliary contacts can be clipped into the circuit-breaker.</p> <p>Any combinations of the auxiliary contact types are possible.</p> <p>Not in combination with switch-disconnector PN...</p> <p>Marking on switch: HIA</p> <p>Labeling in FI-Block: HIAFI.</p> <p>If the trip-indicating auxiliary switch in the fault current block is used, the NC contacts operates as a N/O contact and the NC contact operates as an N/O contact.</p>
Description standard auxiliary contact HIN			<p>Switching with the main contacts Used for indicating and interlocking tasks.</p> <p>Can be used with NZM1 circuit-breaker: a standard auxiliary contact can be clipped into the circuit-breaker.</p> <p>Can be used with NZM2 size circuit-breaker: a standard auxiliary contact can be clipped into the circuit-breaker.</p> <p>Can be used with NZM3, 4 circuit-breaker: up to three standard auxiliary contacts can be clipped into the circuit-breaker.</p> <p>Any combinations of the auxiliary contact types are possible.</p> <p>Marking on switch: HIN.</p> <p>On combination with remote operator NZM-XR... the right mounting location of standard auxiliary contact HIN can be fitted only with individual contacts.</p>
For use with			<p>NZM1(-4), 2(-4), 3(-4), 4(-4)</p> <p>PN1(-4), 2(-4), 3(-4)</p> <p>N(S)1(-4), 2(-4), 3(-4), 4(-4)</p>

Technical data

General

Standards			IEC 60947-5-1
Lifespan, mechanical	Operations	$\times 10^6$	> 5
Operating frequency	Operations/h		 3600
Actuating force		n	 5
Operating torque (screw terminals)		Nm	 0.8
Degree of Protection			IP20
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Open		°C	-25 - +70
Terminal capacities		mm ²	
Solid		mm ²	0.75 - 2.5
Stranded		mm ²	0.5 - 2.5
Flexible with ferrule		mm ²	0.5 - 1.5

Contacts

Rated impulse withstand voltage	U _{imp}	V AC	6000
Rated insulation voltage	U _i	V	500
Overvoltage category/pollution degree			III/3
Control circuit reliability			
at 24 V DC/5 mA	H _F	Fault probability	< 10 ⁻⁷ (i.e. 1 failure to 10 ⁷ operations)
at 5 V DC/1 mA	H _F	Fault probability	< 5 x 10 ⁻⁶ (i.e. 1 failure in 5 x 10 ⁶ operations)
Max. short-circuit protective device			
Fuseless		Type	PKZM0-10/FAZ-B6/1
Fuse	gG/gL	A	10

Switching capacity

Rated operational current	I _e	A	
AC-15			
115 V	I _e	A	6
220 V 230 V 240 V	I _e	A	6

380 V 400 V 415 V	I _e	A	4																																																												
500 V	I _e	A	2																																																												
DC-13																																																															
24 V	I _e	A	3																																																												
42 V	I _e	A	1.7																																																												
60 V	I _e	A	1.2																																																												
110 V	I _e	A	0.6																																																												
220 V	I _e	A	0.3																																																												
Lifespan, electrical																																																															
AC-15																																																															
230 V/0.5 A	Operations	x 10 ⁶	1.6																																																												
230 V/1.0 A	Operations	x 10 ⁶	1																																																												
230 V/3.0 A	Operations	x 10 ⁶	0.7																																																												
DV-13																																																															
12 V/2.8 A	Operations	x 10 ⁶	1.2																																																												
Auxiliary contacts																																																															
Rated operational voltage	U _e	V																																																													
Rated operational voltage	U _e	V AC	500																																																												
Rated operational voltage, max.	U _e	V DC	220																																																												
Conventional thermal current	I _{th} = I _e	CSA	4																																																												
Rated operational current	I _e	A																																																													
Different rated operational currents when used as auxiliary contact for NZM circuit-breaker			<div><div><div>bei AC = 50/60 Hz</div><div>Bemessungs- betriebsstrom</div></div><table><tr><td>AC-15</td><td>I_e</td><td>A</td><td>4</td><td>4</td><td>4</td></tr><tr><td>230 V</td><td>I_e</td><td>A</td><td>4</td><td>4</td><td>4</td></tr><tr><td>400 V</td><td>I_e</td><td>A</td><td>2</td><td>-</td><td>2</td></tr><tr><td>500 V</td><td>I_e</td><td>A</td><td>1</td><td>-</td><td>1</td></tr><tr><td>DC-13</td><td>I_e</td><td>A</td><td>3</td><td>3</td><td>3</td></tr><tr><td>24 V</td><td>I_e</td><td>A</td><td>1.7</td><td>1</td><td>1.5</td></tr><tr><td>42 V</td><td>I_e</td><td>A</td><td>1.2</td><td>0.8</td><td>0.8</td></tr><tr><td>60 V</td><td>I_e</td><td>A</td><td>0.6</td><td>0.5</td><td>0.5</td></tr><tr><td>110 V</td><td>I_e</td><td>A</td><td>0.3</td><td>0.2</td><td>0.2</td></tr><tr><td>220 V</td><td>I_e</td><td>A</td><td></td><td></td><td></td></tr></table></div> <div>M22- (C)K10(01)M22- CK11(02) (20)XHIV</div>	AC-15	I _e	A	4	4	4	230 V	I _e	A	4	4	4	400 V	I _e	A	2	-	2	500 V	I _e	A	1	-	1	DC-13	I _e	A	3	3	3	24 V	I _e	A	1.7	1	1.5	42 V	I _e	A	1.2	0.8	0.8	60 V	I _e	A	0.6	0.5	0.5	110 V	I _e	A	0.3	0.2	0.2	220 V	I _e	A			
AC-15	I _e	A	4	4	4																																																										
230 V	I _e	A	4	4	4																																																										
400 V	I _e	A	2	-	2																																																										
500 V	I _e	A	1	-	1																																																										
DC-13	I _e	A	3	3	3																																																										
24 V	I _e	A	1.7	1	1.5																																																										
42 V	I _e	A	1.2	0.8	0.8																																																										
60 V	I _e	A	0.6	0.5	0.5																																																										
110 V	I _e	A	0.3	0.2	0.2																																																										
220 V	I _e	A																																																													
Rated conditional short-circuit current	I _q	kA	1																																																												
Short-circuit protection																																																															
max. fuse		A gG/gL	10																																																												
Max. miniature circuit-breaker		A	FAZ-B6/B1																																																												
Operating times			<div>Early-make time of the HIV compared to the main contacts during with make and break switching.</div> <div>(switch times with manual operation):</div> <div>NZM1, PN1, N(S)1: ca. 20 ms</div> <div>NZM2, PN2, N(S)2: ca. 20 ms</div> <div>NZM3, PN3, N(S)3: ca. 20 ms</div> <div>NZM4, N(S)4: approx. 90 ms, the HIV switch early Offswitching not forward.</div>																																																												
Terminal capacities		mm ²																																																													
Solid or flexible conductor, with ferrule		mm ²	1 x (0,75 - 2,5) 2 x (0,75 - 2,5)																																																												
UL/CSA																																																															
Rated operational current	I _e	A	5 A – 600 V AC 1 A - 250 V DC																																																												
Other technical data (sheet catalogue)			Maximum equipment and position of the internal accessories																																																												

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I _n	A	6
Heat dissipation per pole, current-dependent	P _{vid}	W	0.11
Equipment heat dissipation, current-dependent	P _{vid}	W	0
Static heat dissipation, non-current-dependent	P _{vs}	W	0
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 6.0


Low-voltage industrial components (EG000017) / Auxiliary contact block (EC000041)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Auxiliary switch block (ecI@ss8.1-27-37-13-02 [AKN342010])			
Number of contacts as change-over contact			0
Number of contacts as normally open contact			0
Number of contacts as normally closed contact			1
Rated operation current I _e at AC-15, 230 V		A	6
Type of electric connection			Screw connection
Model			Top mounting and integrable
Mounting method			Front fastening

Approvals


Product Standards			IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking
UL File No.			E29184
UL Category Control No.			NKCR
CSA File No.			012528
CSA Class No.			3211-03

North America Certification		UL listed, CSA certified
Degree of Protection		UL/CSA Type: -

Dimensions

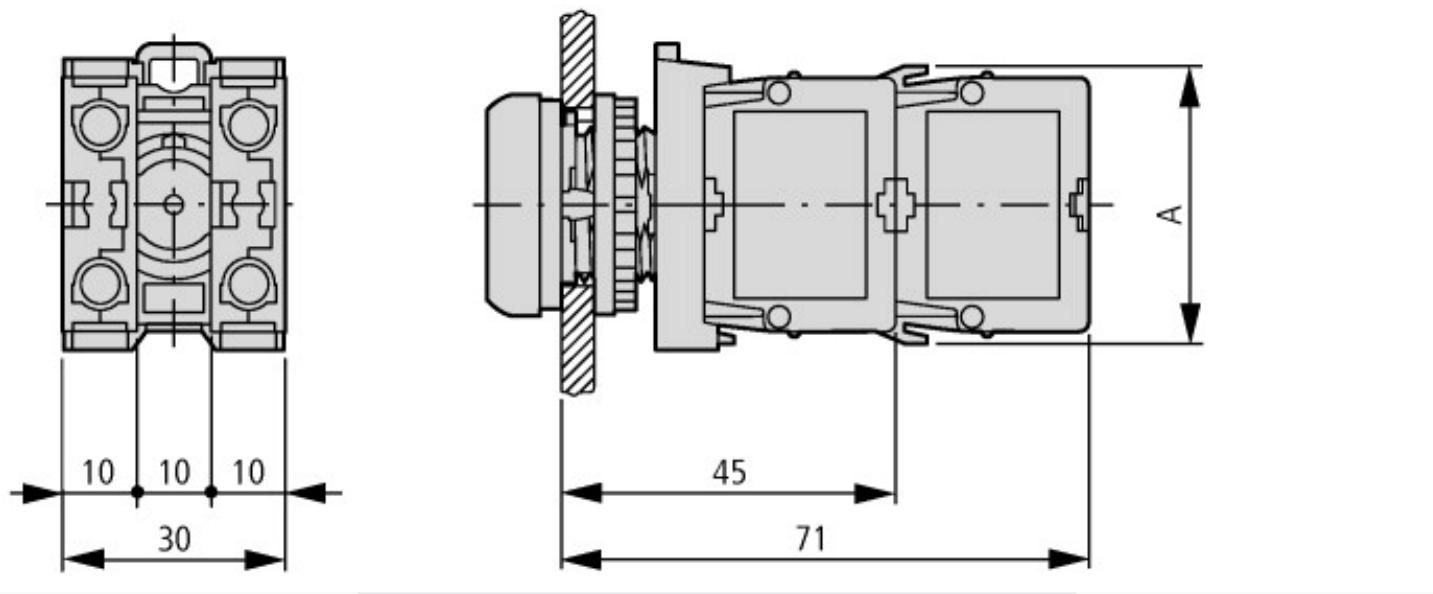

A = 37.2

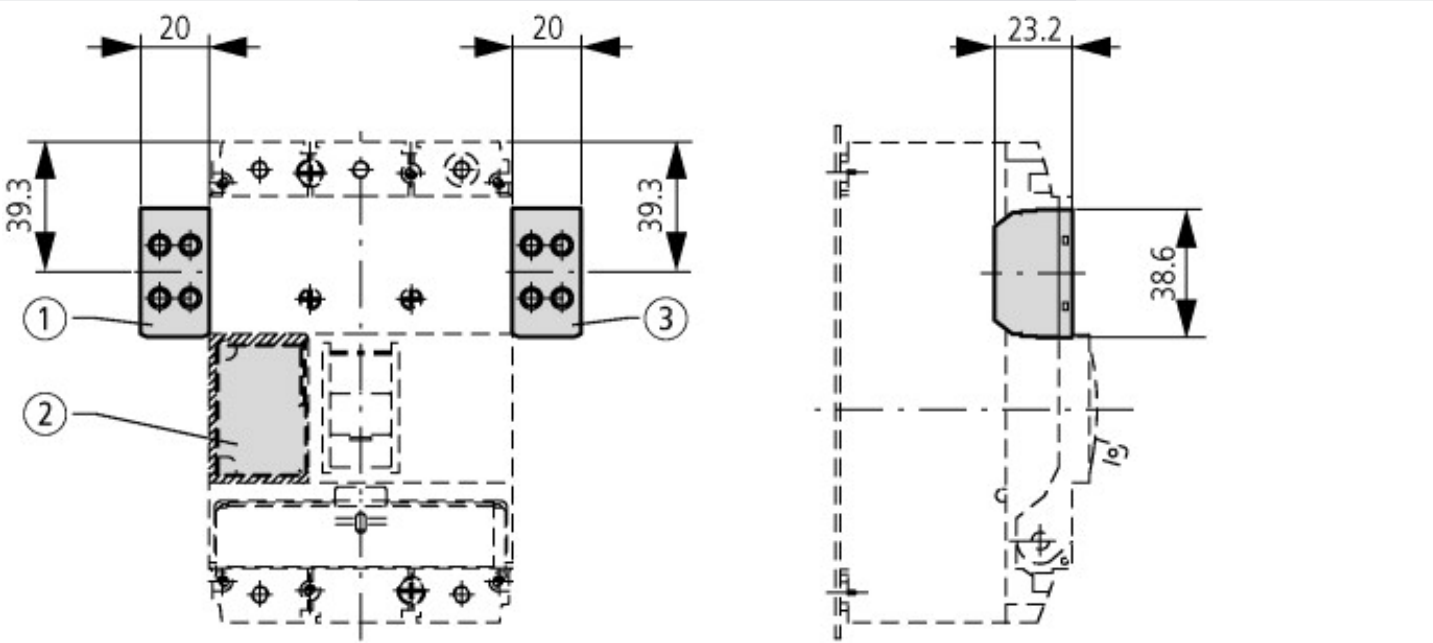

Pushbutton with M22-(C)K...
 Pushbutton with M22-(C) LED... + M22-XLED...

Additional product information (links)

IL04716002Z (AWA1160-1745) RMQ-Titan System	
IL04716002Z (AWA1160-1745) RMQ-Titan System	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL04716002Z2016_09.pdf
Maximum equipment and position of the internal accessories	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.178