



Earth-leakage circuit-breaker 0, 03-5 A

Part no. PFR-5
Article no. 285557

Delivery program

Rated fault currents	$I_{\Delta n}$	A	0.03, 0.1, 0.3, 0.5, 1, 3, 5
Description			Adjustable fault current and delay time Fault current early warning by flashing, red LED Pulse-current sensitive Integrated auxiliary contact (1 C/O) Ring-type transformer must also be ordered not UL/CSA approved
Rated control voltage	U_s	V	230 V AC 50/60Hz
Notes			
Adjustable fault current: 0.03, 0.1, 0.3, 0.5, 1, 3, 5 A			
Adjustable delay time: 0.02, 0.1, 0.3, 0.5, 1, 3, 5 A			

Technical data

Electrical

Standards			IEC/EN 60947-2, IEC 755, IEC 1008, IEC 1009
Sensitivity			Pulse current sensitive, type A
Rated control voltage	U_s	V AC	230 ±20 % (50/60 Hz)
Motor rating	P_e	W	3
Rated fault currents	$I_{\Delta n}$	A	0.03, 0.1, 0.3, 0.5, 1, 3, 5
Delay time	t_v	s	0.02, 0.1, 0.3, 0.5, 1, 3, 5
Relay contacts			1 integrated changeover contact
Rated voltage of the relay contact		V AC/DC	250/100
Rated current of the relay contact		A	6

Mechanical

Standard front dimension		mm	45
Enclosure height		mm	85
Device width		mm	45
Mounting			Snap fixing, top-hat rail DIN 46277, IEC/EN 60715
Terminals top and bottom			Box terminals
Terminal protection			Finger/back-of-hand proof to BGV A2, VDE 106 part 100
Terminal capacities		mm ²	2 x 0.75 - 2.5 solid, 2 x 0.75 - 1.5 flexible/with ferrules
Sealability			Setting buttons

Ambient temperature

Operation		°C	-10 - +50
-----------	--	----	-----------

Design verification as per IEC/EN 61439


Technical data for design verification			
Operating ambient temperature min.		°C	-10
Operating ambient temperature max.		°C	50
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.

10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 6.0

Low-voltage industrial components (EG000017) / Residual current release for power circuit breaker (EC001021)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Fault current switch for circuit breakers (ecl@ss8.1-27-37-04-11 [AKF009010])			
Rated control supply voltage Us at AC 50HZ	V		184 - 276
Rated control supply voltage Us at AC 60HZ	V		184 - 276
Rated control supply voltage Us at DC	V		0 - 0
Rated fault current	A		0.03 - 5
Max. power on-delay time	ms		5000
Delay adjustable			Yes
Max. rated operation voltage Ue	V		276

Dimensions

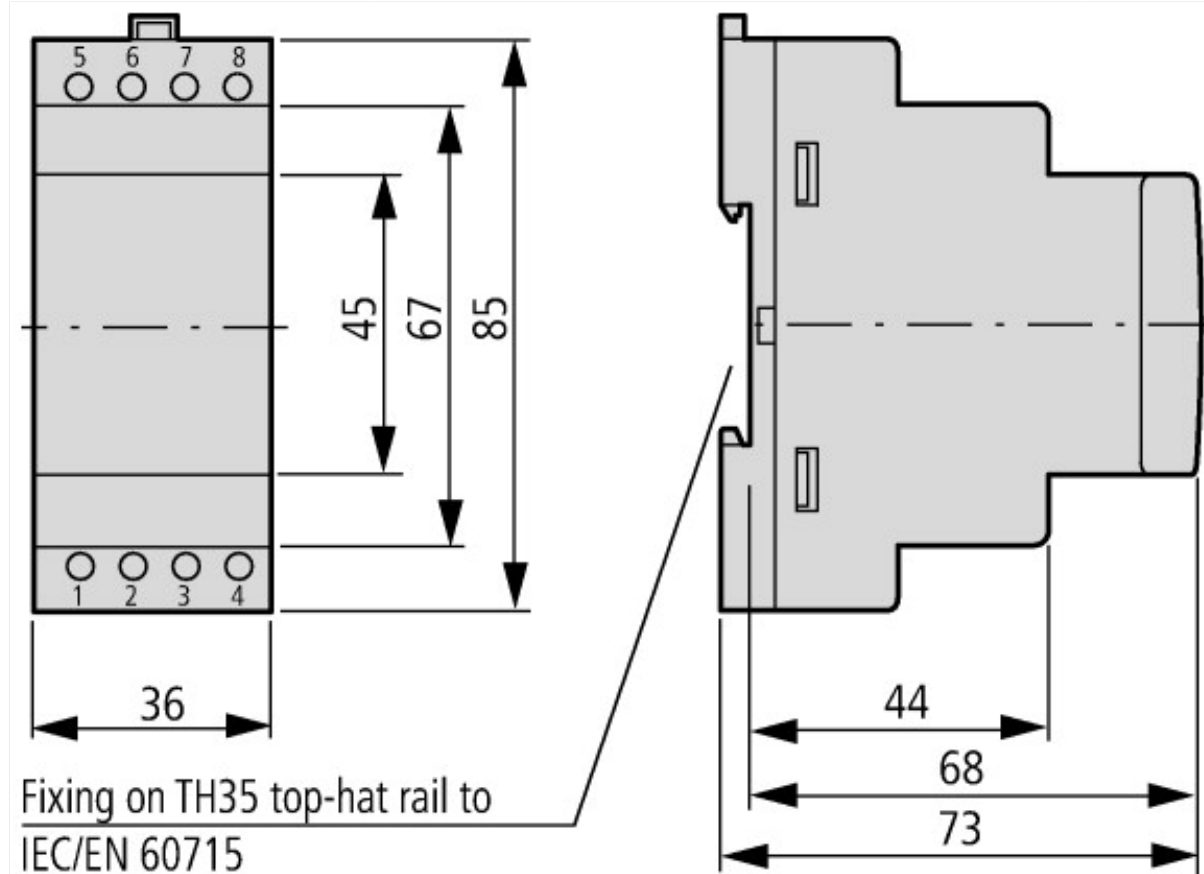

Additional product information (links)

IL01219036Z (AWA1230-2214) Residual-current relay: converter for earth-leakage circuit-breaker

IL01219036Z (AWA1230-2214) Residual-current relay: converter for earth-leakage circuit-breaker

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01219036Z2011_01.pdf