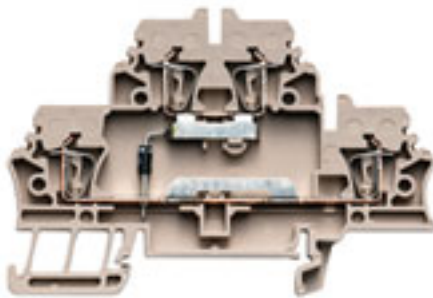


ZDK 2.5/D/2**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image****Spring connection with tension clamp Technology**

Tension clamp technology is a universal contact system for all common conductor connection types. Its fantastic level of flexibility makes the tension clamp a profitable alternative connection.

General ordering data

Version	Z-series, Component terminal, Double-tier terminal, Rated cross-section: 2.5 mm ² , Tension-clamp connection, dark beige
Order No.	1690030000
Type	ZDK 2.5/D/2
GTIN (EAN)	4008190877903
Qty.	50 pc(s).

ZDK 2.5/D/2

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	53 mm	Depth (inches)	2.087 °C
Depth including DIN rail	54 mm	Height	79.1 mm
Height (inches)	3.114 °C	Width	5.1 mm
Width (inches)	0.201 °C	Net weight	10.62 g

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50
Continuous operating temp., max.	120		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Material data

Material	Wemid	Colour	dark beige
UL 94 flammability rating	V-0		

System specifications

Version	Tension-clamp connection, for plug-in cross-connector, One end without connector, with diode	End cover plate required	Yes
Number of potentials	1	Number of levels	2
Number of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	Yes	PE connection	No
Rail	TS 35	N-function	No
PE function	No	PEN function	No

Additional technical data

Electronic component	Diode	Explosion-tested version	Yes
Open sides	right	Type of mounting	Snap-on

CSA rating data

Certificate No. (CSA)	80053378-200039	Conductor size Factory wiring max. (CSA)	12 AWG
Conductor size Factory wiring min. (CSA)	26 AWG	Conductor size Field wiring max. (CSA)	12 AWG
Conductor size Field wiring min. (CSA)	26 AWG	Current size B (CSA)	10 A
Current size D (CSA)	10 A	Voltage size B (CSA)	300 V
Voltage size D (CSA)	300 V	Wire cross section max. (CSA)	12 AWG
Wire cross section min. (CSA)	26 AWG		

Component

Component diode	Type diode	1N4007
	Forward current	1 A
	Reverse voltage	1,300 V
	Forward voltage	0.7 V

ZDK 2.5/D/2

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Conductors for clamping (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max. 2.5 Nm

Conductors for clamping (rated connection)

Blade size	0.6 x 3.5 mm	Clamping range, max.	2.5 Nm
Clamping range, min.	0.05 Nm	Connection direction	top
Gauge to IEC 60947-1	A2	Number of connections	4
Stripping length	10 mm	Twin wire-end ferrules, max.	0.34 Nm
Twin wire-end ferrules, min.	0.14 Nm	Type of connection	Tension-clamp connection
Wire connection cross section AWG, min.	AWG 30	Wire connection cross section, finely stranded, max.	2.5 Nm
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	1.5 Nm	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 Nm
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	1.5 Nm	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 Nm
Wire connection cross-section, solid core, max.	2.5 Nm	Wire connection cross-section, solid core, min.	0.5 Nm

General

Rail	TS 35	Standards	IEC 60947-7-1
Wire connection cross section AWG, min.	AWG 30		

Rating data

Rated cross-section	2.5 Nm	Rated voltage	500 V
Rated current	10 A	Standards	IEC 60947-7-1
Volume resistance according to IEC 60947-7-x	1.33 °C	Rated impulse withstand voltage	6 kV
Power loss in accordance with IEC 60947-7-x	0.77 W	Pollution severity	3

UL rating data

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	14 AWG
Conductor size Factory wiring min. (UR)	26 AWG	Conductor size Field wiring max. (UR)	14 AWG
Conductor size Field wiring min. (UR)	26 AWG	Current size C (UR)	15 A
UL_current_Print	15 A	UL_voltage_Print	300 V
UL_wire_max_Print	14 A / 6 A / 10 A / 13 A / 15 A	UL_wire_min_Print	26 A / 6 A / 10 A / 13 A / 15 A
Voltage size C (UR)	300 V		

Classifications

ETIM 6.0	EC000903	ETIM 7.0	EC000903
ETIM 8.0	EC000903	ECLASS 9.0	27-14-11-27
ECLASS 9.1	27-14-11-47	ECLASS 10.0	27-14-11-27
ECLASS 11.0	27-14-11-27		

ZDK 2.5/D/2**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Important note**

Product information	The allowed continuous operating temperature must be observed
---------------------	---

Approvals

Approvals



ROHS	Conform
------	---------

UL File Number Search	E60693
-----------------------	--------

Downloads

Approval/Certificate/Document of Conformity	EAC certificate DNVGL certificate Declaration of Conformity Declaration of Conformity all terminals
---	--

Engineering Data	EPLAN, WSCAD
------------------	------------------------------

User Documentation	StorageConditionsTerminalBlocks
--------------------	---

Catalogues	Catalogues in PDF-format
------------	--

Brochures	
-----------	--

ZDK 2.5/D/2

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

