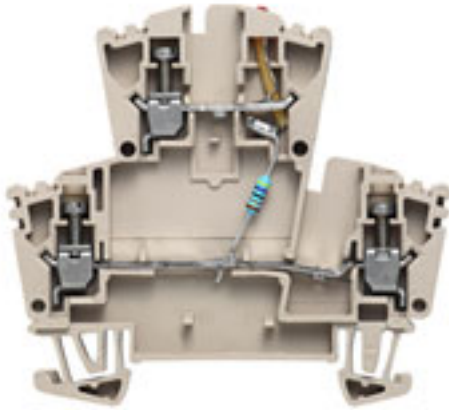


WDK 2.5 LD RT 24VDC +-**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image****Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Version	W-Series, Feed-through terminal, Double-tier terminal, Rated cross-section: 2.5 mm ² , Screw connection
Order No.	1023600000
Type	WDK 2.5 LD RT 24VDC +-
GTIN (EAN)	4008190060855
Qty.	25 pc(s).

WDK 2.5 LD RT 24VDC +-**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	62.5 mm	Depth (inches)	2.461 °C
Depth including DIN rail	63 mm	Height	69 mm
Height (inches)	2.717 °C	Width	5.1 mm
Width (inches)	0.201 °C	Net weight	11.19 g

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	120 °C		

Material data

Material	Wemid	Colour	dark beige
UL 94 flammability rating	V-0		

System specifications

Version	Screw connection, with LED	End cover plate required	Yes
Number of potentials	1	Number of levels	2
Number of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	Yes	PE connection	No
Rail	TS 35	N-function	No
PE function	No	PEN function	No

Additional technical data

Electronic component	red LED	Explosion-tested version	No
Number of similar terminals	1	Type of mounting	Snap-on

Component

Component LED	Colour	red
	Voltage, min.	6 V
	Voltage, max.	24 V
	Current	20 mA
Component resistor	Resistance	4.7 GBit
	Power loss	0.4 W
	Tolerance (%)	1 %

Conductors for clamping (rated connection)

Blade size	0.6 x 3.5 mm
------------	--------------

WDK 2.5 LD RT 24VDC +-

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Clampable conductor	Connection specification		Screw connection	
	Cross-section for conductor connection	Type	solid, H05(07) V-U	
		min.	0.5 Nm	
		max.	4 Nm	
		nominal	2.5 Nm	
	wire end ferrule	Stripping length	min.	10 mm
			max.	10 mm
			nominal	10 mm
		Recommended wire-end ferrule		
	Connection specification		Screw connection	
	Cross-section for conductor connection	Type	flexible, H05(07) V-K	
		min.	0.5 Nm	
		max.	4 Nm	
		nominal	2.5 Nm	
	wire end ferrule	Stripping length	min.	10 mm
			max.	10 mm
			nominal	10 mm
		Recommended wire-end ferrule		
Clamping range, max.		4 Nm		
Clamping range, min.		0.13 Nm		
Clamping screw		M 2.5		
Connection cross-section, stranded, max.		4 Nm		
Connection cross-section, stranded, min.		1.5 Nm		
Connection direction		on side		
Gauge to IEC 60947-1		A3		
Number of connections		3		
Stripping length		10 mm		
Tightening torque, max.		0.6 inch		
Tightening torque, min.		0.4 inch		
Type of connection		Screw connection		
Wire connection cross section, finely stranded, max.		4 Nm		
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.		2.5 Nm		
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.		0.5 Nm		
Wire connection cross-section, solid core, max.		4 Nm		
Wire connection cross-section, solid core, min.		0.5 Nm		

Dimensions

TS 35 offset	35.5 mm
--------------	---------

Display element

Current	5 mA	Indicator element	red
Operating voltage for display, max.	24 V	Operating voltage for display, min.	24 V
Type of voltage for indicator	DC		

General

Rail	TS 35	Standards	IEC 60947-7-1
------	-------	-----------	---------------

Creation date July 23, 2021 3:14:39 PM CEST

WDK 2.5 LD RT 24VDC +-**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Rating data**

Rated cross-section	2.5 Nm	Rated voltage	24 V
Current at maximum wires	10 A	Standards	IEC 60947-7-1
Volume resistance according to IEC 60947-7-x	1.33 °C	Rated impulse withstand voltage	0.8 kV
Power loss in accordance with IEC 60947-7-x	0.77 W	Pollution severity	3

Classifications

ETIM 6.0	EC000903	ETIM 7.0	EC000903
ETIM 8.0	EC000903	ECLASS 9.0	27-14-11-27
ECLASS 9.1	27-14-11-47	ECLASS 10.0	27-14-11-27
ECLASS 11.0	27-14-11-27		

Important note

Product information	The allowed continuous operating temperature must be observed
---------------------	---

Approvals

Approvals



ROHS	Conform
------	---------

Downloads

Approval/Certificate/Document of Conformity	EAC certificate Declaration of Conformity Declaration of Conformity all terminals
Engineering Data	STEP
Engineering Data	EPLAN, WSCAD, Zuken E3.S
User Documentation	StorageConditionsTerminalBlocks
Catalogues	Catalogues in PDF-format
Brochures	

WDK 2.5 LD RT 24VDC +-

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

