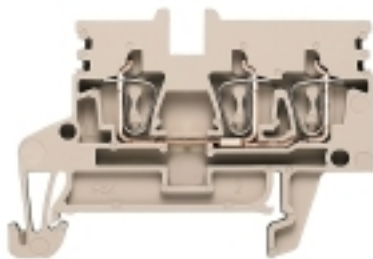


ZDU 2.5N/3AN**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image****Spring connection with tension clamp Technology**

Tension clamp technology is a universal contact system for all common conductor connection types. Its fantastic level of flexibility makes the tension clamp a profitable alternative connection.

General ordering data

Version	Feed-through terminal, Tension-clamp connection, 2.5 mm ² , 800 V, 24 A, dark beige
Order No.	1933720000
Type	ZDU 2.5N/3AN
GTIN (EAN)	4032248586752
Qty.	50 pc(s).

ZDU 2.5N/3AN**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	38.5 mm	Depth (inches)	1.516 °C
Depth including DIN rail	39 mm	Height	56.5 mm
Height (inches)	2.224 °C	Width	5.1 mm
Width (inches)	0.201 °C	Net weight	6.88 g

Temperatures

Storage temperature		Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity
	-25 °C...55 °C		
Continuous operating temp., min.	-50	Continuous operating temp., max.	120

Material data

Material	Wemid	Colour	dark beige
UL 94 flammability rating	V-0		

Rating data IECEx/ATEX

Certificate No. (ATEX)	KEMA06ATEX0271U	Certificate No. (IECEX)	IECEXULD15.0008U
Max. voltage (ATEX)	550 V	Current (ATEX)	21.5 A
Wire cross section max. (ATEX)	2.5 mm ²	Max. voltage (IECEX)	440 V
Current (IECEX)	21.5 A	Wire cross section max. (IECEX)	4 mm ²
Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity	Marking EN 60079-7	
Ex 2014/34/EU label	II 2 G D		Ex eb II C Gb

System specifications

Version	Tension-clamp connection, for plug-in cross-connector, One end without connector	End cover plate required	Yes
Number of levels	1	Number of clamping points per level	3
Number of potentials per tier	1	Levels cross-connected internally	No
PE connection	No	Rail	TS 35

Additional technical data

Explosion-tested version	Yes	Open sides	right
Type of mounting	Snap-on		

CSA rating data

Certificate No. (CSA)	200039-1842498	Current size B (CSA)	24 A
Current size C (CSA)	24 A	Voltage size B (CSA)	300 V
Voltage size C (CSA)	300 V	Wire cross section max. (CSA)	12 AWG
Wire cross section min. (CSA)	30 AWG		

Conductors for clamping (additional connection)

Cross-section for connected wire, AWG, additional connection, max.	AWG 12	Cross-section for connected wire, AWG, additional connection, min.	AWG 24
--	--------	--	--------

Creation date July 23, 2021 3:08:04 PM CEST

Catalogue status 23.07.2021 / We reserve the right to make technical changes.

ZDU 2.5N/3AN**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Conductors for clamping (rated connection)**

Blade size	0.6 x 3.5 mm	Clamping range, max.	4 Nm
Clamping range, min.	0.05 Nm	Connection cross-section, stranded, max.	2.5 Nm
Connection cross-section, stranded, min.	1.5 Nm	Connection direction	top
Gauge to IEC 60947-1	A2	Number of connections	3
Stripping length	10 mm	Type of connection	Tension-clamp connection
Wire connection cross section, finely stranded, max.	2.5 Nm	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	1.5 Nm
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 Nm	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	1.5 Nm
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 Nm	Wire connection cross-section, solid core, max.	4 Nm
Wire connection cross-section, solid core, min.	0.5 Nm		

Dimensions

TS 35 offset	25.5 mm
--------------	---------

General

Rail	TS 35	Standards	IEC 60947-7-1
------	-------	-----------	---------------

Rating data

Rated cross-section	2.5 Nm	Rated voltage	800 V
Rated current	24 A	Current at maximum wires	24 A
Standards	IEC 60947-7-1	Volume resistance according to IEC 60947-7-x	1.33 °C
Rated impulse withstand voltage	6 kV	Power loss in accordance with IEC 60947-7-x	0.77 W
Pollution severity	3		

UL rating data

Certificate No. (cURus)	E60693	Conductor size Factory wiring max. (cURus)	12 AWG
Conductor size Factory wiring min. (cURus)	30 AWG	Conductor size Field wiring max. (cURus)	12 AWG
Conductor size Field wiring min. (cURus)	30 AWG	Current size B (cURus)	20 A
Current size C (cURus)	20 A	UL_current_Print	20 A
UL_voltage_Print	300 V	UL_wire_max_Print	12 A / 6 A / 10 A / 13 A / 15 A
UL_wire_min_Print	30 A / 6 A / 10 A / 13 A / 15 A	Voltage size B (cURus)	300 V
Voltage size C (cURus)	300 V		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ETIM 8.0	EC000897	ECLASS 9.0	27-14-11-20
ECLASS 9.1	27-14-11-20	ECLASS 10.0	27-14-11-20
ECLASS 11.0	27-14-11-20		

ZDU 2.5N/3AN

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS Conform

UL File Number Search E60693

Downloads

Approval/Certificate/Document of Conformity

- [Attestation of Conformity](#)
- [IECEX Certificate](#)
- [EAC certificate](#)
- [INMETRO certificate](#)
- [EAC EX Certificate](#)
- [CCC Ex Certificate](#)
- [ATEX Certificate](#)
- [Declaration of Conformity](#)
- [Declaration of Conformity all terminals](#)

Engineering Data [STEP](#)Engineering Data [EPLAN, WSCAD, Zuken E3.S](#)Product Change Notification [PCN ZDU2.5N 3AN ZPE2.5N 3AN ATEX IECEx change](#)User Documentation [StorageConditionsTerminalBlocks](#)
[NTI ZDU/ZPE 2.5N/3AN](#)Catalogues [Catalogues in PDF-format](#)

Brochures

ZDU 2.5N/3AN

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Drawings

