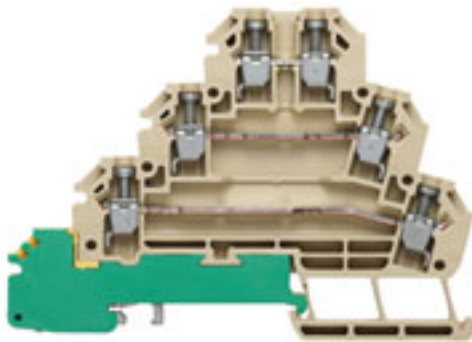


MAK 2.5**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image****Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Version	W-Series, Motor-connection terminal, Rated cross-section: 2.5 mm ² , Screw connection, Direct mounting
Order No.	1615270000
Type	MAK 2.5
GTIN (EAN)	4008190193867
Qty.	50 pc(s).

MAK 2.5

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	63 mm	Depth (inches)	2.48 °C
Depth including DIN rail	64 mm	Height	88 mm
Height (inches)	3.465 °C	Width	6.2 mm
Width (inches)	0.244 °C	Net weight	24.26 g

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	100		

Material data

Material	PA 66	Colour	beige / yellow
UL 94 flammability rating	V-2		

System specifications

Version	Screw connection, With PE connection, One end without connector	End cover plate required	Yes
Number of potentials	4	Number of levels	4
Number of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	No	PE connection	Yes
Rail	TS 35	N-function	No
PE function	Yes	PEN function	No

2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)

Cross-section for connected wire, solid, two clampable wires, max.	1 Nm	Cross-section for connected wire, solid, two clampable wires, min.	0.5 Nm
Cross-section for connected wire, stranded, two clampable wires, max.	1 Nm	Cross-section for connected wire, stranded, two clampable wires, min.	0.5 Nm
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, max.	0.75 Nm	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, min.	0.5 Nm
Wire connection cross section, finely stranded, two clampable wires, min.	0.5 Nm	Wire cross-section, finely stranded, two clampable wires, max.	1 Nm

Additional technical data

Explosion-tested version	No	Installation advice	Direct mounting
Open sides	right	Type of mounting	Snap-on

CSA rating data

Certificate No. (CSA)	12400-320	Current size B (CSA)	10 A
Current size C (CSA)	10 A	Current size D (CSA)	10 A
Voltage size B (CSA)	300 V	Voltage size C (CSA)	300 V
Voltage size D (CSA)	300 V	Wire cross section max. (CSA)	12 AWG
Wire cross section min. (CSA)	26 AWG		

Conductors for clamping (rated connection)

Blade size	0.6 x 3.5 mm
------------	--------------

MAK 2.5

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Clampable conductor	Connection specification		Screw connection	
	Cross-section for conductor connection	Type	solid, H05(07) V-U	
		min.	0.5 Nm	
		max.	4 Nm	
		nominal	2.5 Nm	
	wire end ferrule	Stripping length	min.	8 mm
			max.	8 mm
			nominal	8 mm
		Tightening torque	min.	0.4 inch
			max.	0.6 inch
		Recommended wire-end ferrule		
	Connection specification		Screw connection	
	Cross-section for conductor connection	Type	stranded, H07V-R	
		min.	0.5 Nm	
		max.	4 Nm	
		nominal	2.5 Nm	
	wire end ferrule	Stripping length	min.	8 mm
			max.	8 mm
			nominal	8 mm
		Tightening torque	min.	0.4 inch
			max.	0.6 inch
		Recommended wire-end ferrule		
	Connection specification		Screw connection	
	wire end ferrule	Stripping length	min.	8 mm
			max.	8 mm
			nominal	8 mm
		Tightening torque	min.	0.4 inch
			max.	0.6 inch
		Recommended wire-end ferrule		
Clamping range, max.		4 Nm		
Clamping range, min.		0.13 Nm		
Clamping screw		M 2.5		
Connection cross-section, stranded, max.		4 Nm		
Connection cross-section, stranded, min.		0.5 Nm		
Connection direction		on side		
Gauge to IEC 60947-1		A3		
Number of connections		7		
Stripping length		8 mm		
Tightening torque, max.		0.6 inch		
Tightening torque, min.		0.4 inch		
Type of connection		Screw connection		
Wire connection cross section, finely stranded, max.		4 Nm		
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.		2.5 Nm		
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.		0.5 Nm		
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.		2.5 Nm		
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.		0.5 Nm		

MAK 2.5

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Wire connection cross-section, solid core, max. 4 Nm

Wire connection cross-section, solid core, min. 0.5 Nm

General

Installation advice	Direct mounting	Rail	TS 35
Standards	IEC 60947-7-1 (-7-2)		

Rating data

Rated cross-section	2.5 Nm	Rated voltage	500
Rated current	24 A	Current at maximum wires	31 A
Standards	IEC 60947-7-1 (-7-2)	Volume resistance according to IEC 60947-7-x	1.33 °C
Rated impulse withstand voltage	6 kV	Power loss in accordance with IEC 60947-7-x	0.77 W
Pollution severity	3	Surge voltage category	III

UL rating data

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	12 AWG
Conductor size Factory wiring min. (UR)	26 AWG	Conductor size Field wiring max. (UR)	12 AWG
Conductor size Field wiring min. (UR)	22 AWG	Current size D (UR)	10 A
UL_current_Print	10 A	UL_voltage_Print	300 V
UL_wire_max_Print	12 A / 6 A / 10 A / 13 A / 15 A	UL_wire_min_Print	26 A / 6 A / 10 A / 13 A / 15 A
Voltage size D (UR)	300 V		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ETIM 8.0	EC000897	ECLASS 9.0	27-14-11-20
ECLASS 9.1	27-14-11-20	ECLASS 10.0	27-14-11-20
ECLASS 11.0	27-14-11-20		

Approvals

Approvals



ROHS	Conform
UL File Number Search	E60693

Downloads

Approval/Certificate/Document of Conformity	EAC certificate Declaration of Conformity Declaration of Conformity all terminals
Engineering Data	STEP
Engineering Data	EPLAN, WSCAD, Zuken E3.S
User Documentation	StorageConditionsTerminalBlocks
Catalogues	Catalogues in PDF-format

MAK 2.5

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Drawings

