


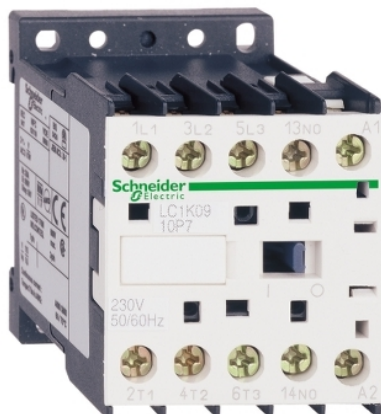

Teknisk informasjon

Serie	TeSys
Produkt eller type komponent	Kontaktor
Produktnavn	TeSys K
Kortnavn utstyr	LC1K
Applikasjon	Kontroll
Contacteur application	Omsk last Motor control

Komplementær

Driftskategori	AC-1 AC-3 AC-4
Antall poler	3P
Power pole contact composition	3 NO
[Ie] nominell driftsstrøm	20 A (at <50 °C) at <= 440 V AC AC-1 for power circuit 9 A at <= 440 V AC AC-3 for power circuit 16 A (at <70 °C) at 690 V AC AC-1 for power circuit
Kontrollkretstype	AC på 50/60 Hz
Styrespenning	48 V AC 50/60 Hz
Motoreffekt kW	2.2 kW at 220...230 V AC 50/60 Hz AC-3 4 kW at 380...415 V AC 50/60 Hz AC-3 4 kW at 440 V AC 50/60 Hz AC-3 4 kW at 480 V AC 50/60 Hz AC-3 4 kW at 500...600 V AC 50/60 Hz AC-3 4 kW at 660...690 V AC 50/60 Hz AC-3 2.2 kW at 400 V AC 50/60 Hz AC-4
Hjelpkontakt sammensetning	1 NO
Overspenningskategori	III
[Ith] fri luft termisk strøm	20 A (at 50 °C) for power circuit 10 A (at 50 °C) for signalling circuit
Irms rated making capacity	110 A AC for power circuit conforming to NF C 63-110 110 A AC for power circuit conforming to IEC 60947 110 A AC for signalling circuit conforming to IEC 60947
Rated breaking capacity	110 A at 415 V conforming to IEC 60947 110 A at 440 V conforming to IEC 60947 80 A at 500 V conforming to IEC 60947 110 A at 220...230 V conforming to IEC 60947 110 A at 380...400 V conforming to IEC 60947 70 A at 660...690 V conforming to IEC 60947
Sikringsstørrelse	25 A gG at <= 440 V for power circuit 25 A aM for power circuit 10 A gG for signalling circuit conforming to IEC 60947 10 A gG for signalling circuit conforming to VDE 0660
Gjennomsnittlig impedanse	3 mOhm - Ith 20 A 50 Hz for power circuit
Isolasjonsmotstand	> 10 MOhm for signale krets
Inrush power in VA	30 VA (at 20 °C)
Hold-in strømforbruk i VA	4.5 VA (at 20 °C)
Varmeavgivelse	1.3 W
Control circuit voltage limits	Operational: 0.8...1.15 Uc (at <50 °C) Drop-out: 0.2...0.75 Uc (at <50 °C)

Bruksområde	3600 cyc/h
Auxiliary contacts type	Type instantaneous 1 NO
Signale krets frekvens	<= 400 Hz
Minimum brytestrøm	5 mA for signale krets
Minimum switching voltage	17 V for signale krets
Driftstid	10...20 ms coil de-energisation and NO opening 10...20 ms coil energisation and NO closing
Sikkerhet pålitelighet nivå	B10d = 1369863 sykluser kontaktor med nominell last i samsvar med EN/ISO 13849-1 B10d = 20000000 sykluser kontaktor med mekanisk belastning i samsvar med EN/ISO 13849-1
Non overlapping avstand	0.5 mm
Mekanisk robusthet	Shocks contactor closed, on X axis: 10 Gn for 11 ms conforming to IEC 60068-2-27 Shocks contactor closed, on Y axis: 15 Gn for 11 ms conforming to IEC 60068-2-27 Shocks contactor closed, on Z axis: 15 Gn for 11 ms conforming to IEC 60068-2-27 Shocks contactor opened, on X axis: 6 Gn for 11 ms conforming to IEC 60068-2-27 Shocks contactor opened, on Y axis: 10 Gn for 11 ms conforming to IEC 60068-2-27 Shocks contactor opened, on Z axis: 10 Gn for 11 ms conforming to IEC 60068-2-27 Vibrations contactor closed: 4 Gn, 5...300 Hz conforming to IEC 60068-2-6 Vibrations contactor opened: 2 Gn, 5...300 Hz conforming to IEC 60068-2-6

Miljø

Produktsertifikater	UL CSA
Protective treatment	TC conforming to IEC 60068 TC conforming to DIN 50016
Operating altitude	2000 m without derating
Flammehemming	V1 i samsvar med UL 94 Requirement 2 conforming to NF F 16-101 Requirement 2 conforming to NF F 16-102

Packing Units

Enhetstype forpakning 1	PCE
Antall enheter forpakning 1	1
Forpakning 1 vekt	179 g
Forpakning 1 høyde	4,8 cm
Forpakning 1 bredde	6,2 cm
Forpakning 1 lengde	6,6 cm
Enhetstype forpakning 2	S02
Antall enheter forpakning 2	50
Forpakning 2 vekt	9,405 kg
Forpakning 2 høyde	15 cm
Forpakning 2 bredde	30 cm
Forpakning 2 lengde	40 cm

Offer Sustainability

Produkts miljøstatus	Green Premium miljømerket produkt
REACH-regelverk	 REACH-erklæring
REACH fri for SVHC	Ja
EU RoHS-direktiv	I samsvar  EU RoHS-erklæring
Fri for giftige tungmetaller	Ja
Kvikksølvfri	Ja
Informasjon om RoHS-unntak	 Ja
Kinas RoHS-forskrift	 Kinas RoHS-Erklæring

Miljøinformasjon	 Produktmiljøprofil
Produktets livssyklus	 Informasjon Om Levetidsslutt
WEEE	Innen EU må produktet avhendes i henhold til bestemte regler for avfallshåndtering og aldri kastes som husholdningsavfall.
Garantiperiode	
Garanti	18 months