



WE CONNECT TO PROTECT

K'ELECTRIC

K'electric GmbH

Carl-Benz-Str. 7

95448 Bayreuth / Germany

Telefon +49 (0) 921 1512678-0

Telefax +49 (0) 921 1512678-20

E-mail: office@k-electric-gmbh.de

www.k-electric-gmbh.de



TYTAN D0 fuse links

for D0 fuse-bases according to IEC 60269

for fuse-switch combinations type D0 according to IEC/EN 60947-3

low-loss design

D02 silver plated surface

Rated current	Fuse type	Colour of fuse-indicator	Caps	Item No.
2A	D01	Pink	Nickel plated	100202
4A	D01	Brown	Nickel plated	100202
6A	D01	Green	Nickel plated	100202
10A	D01	Red	Nickel plated	100202
13A	D01	Black	Nickel plated	100202
16A	D01	Grey	Nickel plated	100202
20A	D02	Blue	Silver plated	100202
25A	D02	Yellow	Silver plated	100202
32A	D02	Violet	Silver plated	100202
35A	D02	Black	Silver plated	100202
40A	D02	Black	Silver plated	100202
50A	D02	White	Silver plated	100202
63A	D02	Copper	Silver plated	100202

Approvals:

IEC/EN 60269-1

IEC/EN 60269-3

DIN VDE 0636-3, DIN 49522

To be operated by ordinary persons acc. to

IEC/EN 61439-3

Description

Fuse type:	D0
Operating class:	gG
Rated voltage:	400 VAC 50Hz / 250VDC
Rated current:	2-63A
Rated breaking capacity	50kA AC / 8kA VDC

Electrical data

Rated voltage:	400 VAC 250 VDC
----------------	--------------------

Rated current:	2-63 A
----------------	--------

Breaking capacity:	AC cos phi =0,1	50 kA _{r.m.s.}
	DC $\tau = 15\text{ms}$	8 kA


Max. power loss P _n :	D01	10 0202	2A	1,5 W
		10 0204	4A	1,6 W
		10 0206	6A	1,7 W
		10 0210	10A	1,8 W
		10 0213	13A	2,1 W
		10 0216	16A	2,2 W
	D02	10 0220	20A	2 W
		10 0225	25A	3 W
		10 0232	32A	3,5 W
		10 0240	40A	4,6 W
		10 0250	50A	4,8 W
		10 0263	63A	5,4 W

Mechanical data

Weight:

D01	10 0202	2A	5,9 g
	10 0204	4A	5,9 g
	10 0206	6A	5,9 g
	10 0210	10A	6,6 g
	10 0213	13A	6,6 g
	10 0216	16A	6,6 g
D02	10 0220	20A	12 g
	10 0225	25A	13 g
	10 0232	32A	13 g
	10 0240	40A	13 g
	10 0250	50A	13 g
	10 0263	63A	15 g

Dimensions [mm]

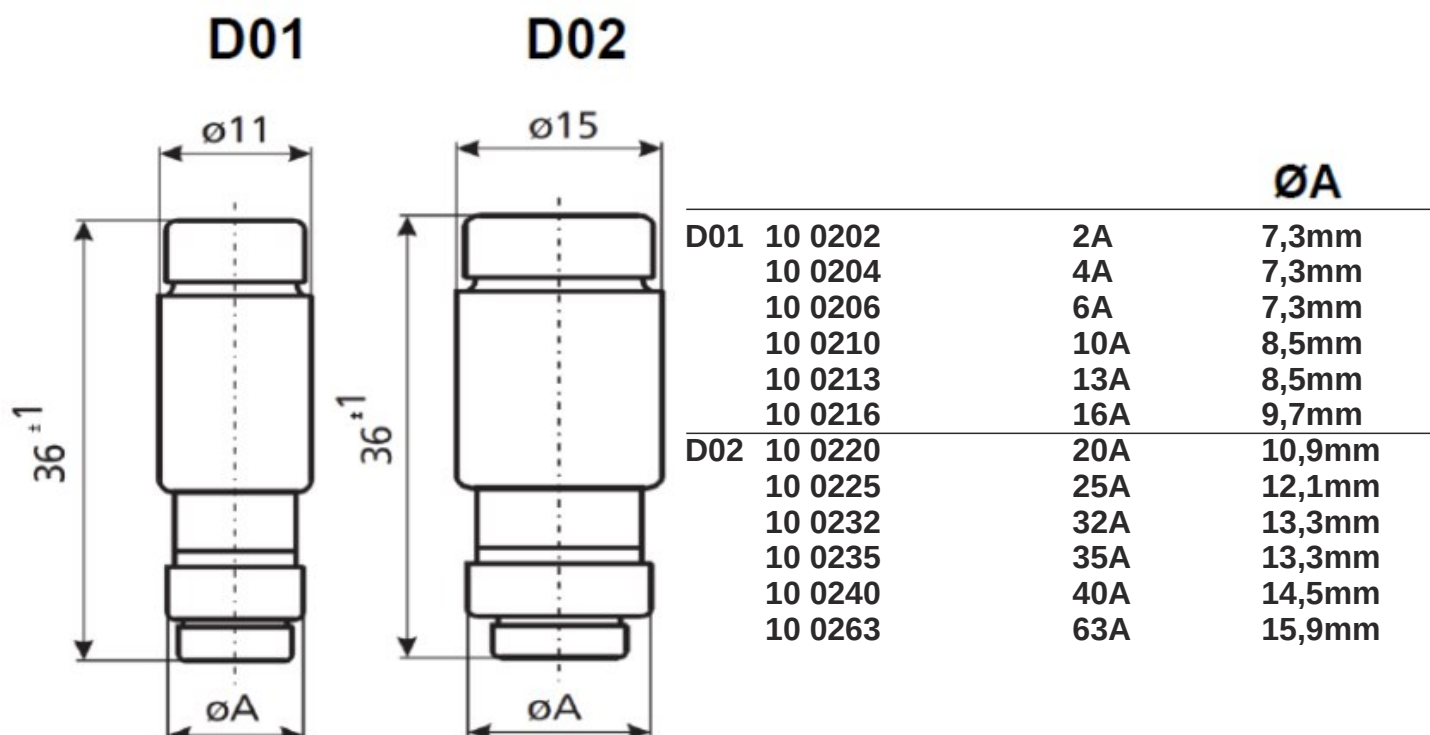


Circuit diagram




Characteristics

Time current characteristics

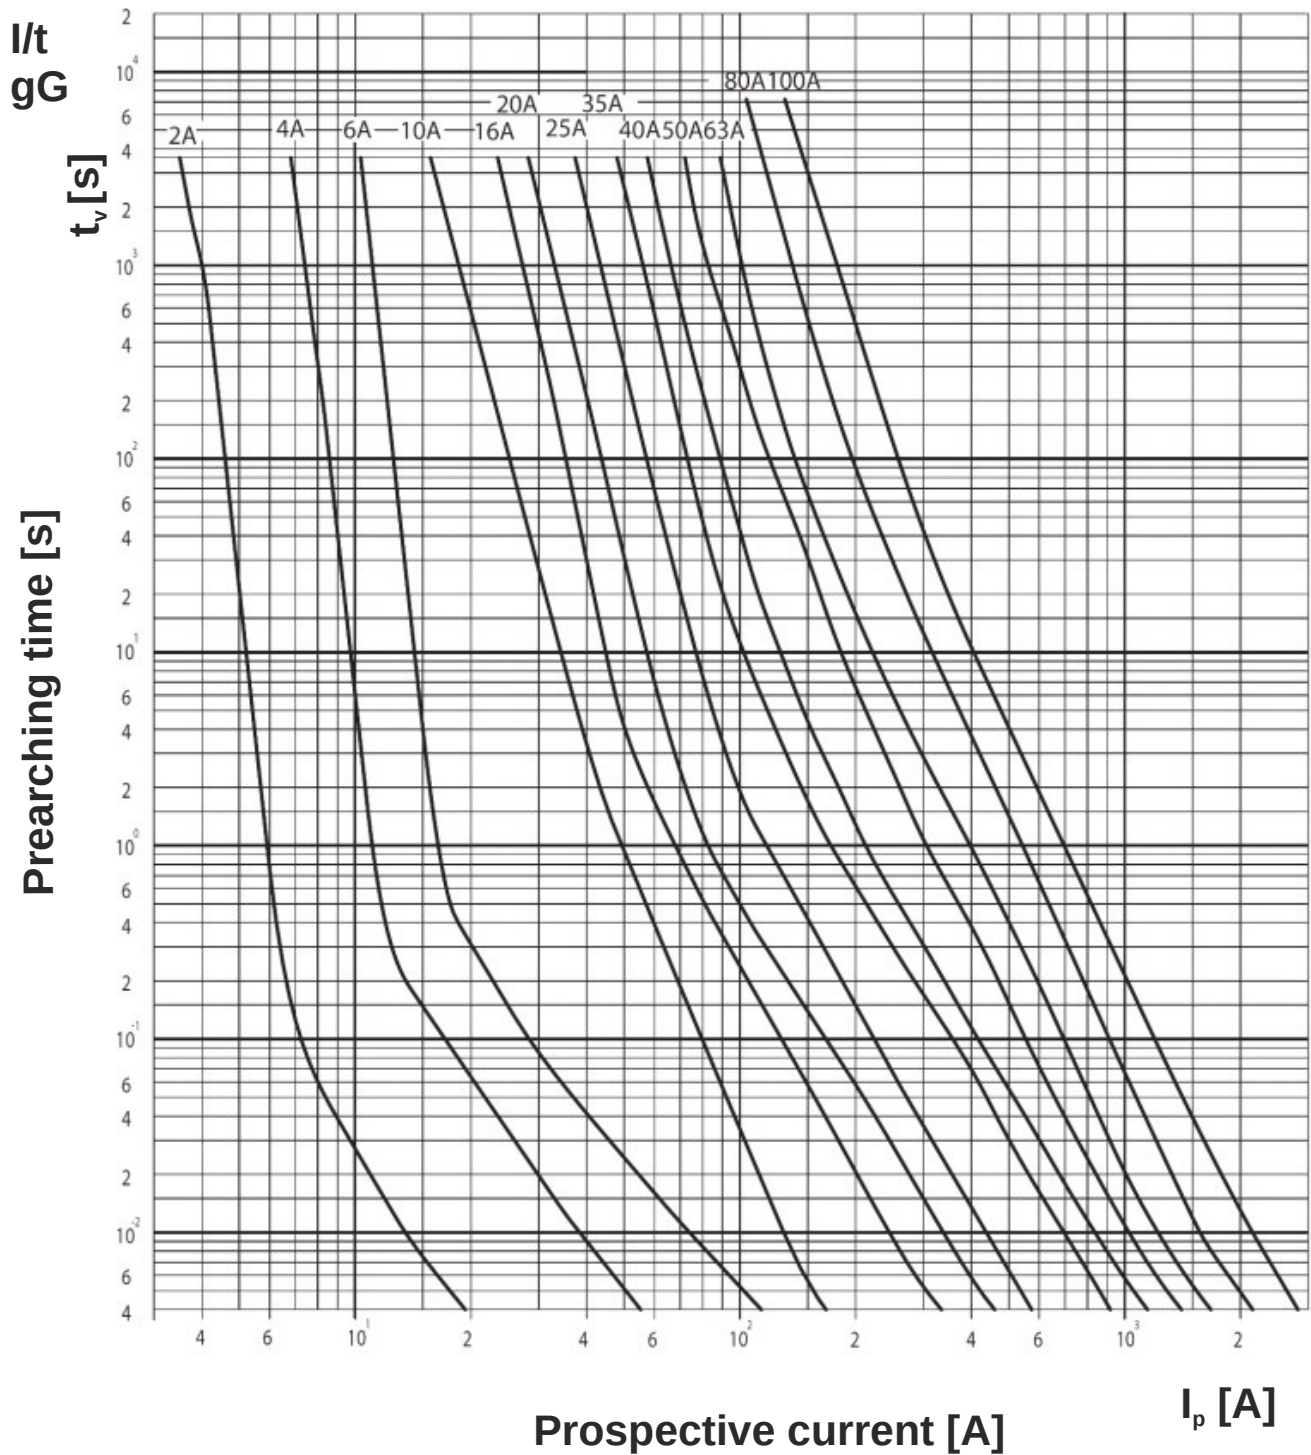

Characteristics

Cut-off current characteristics

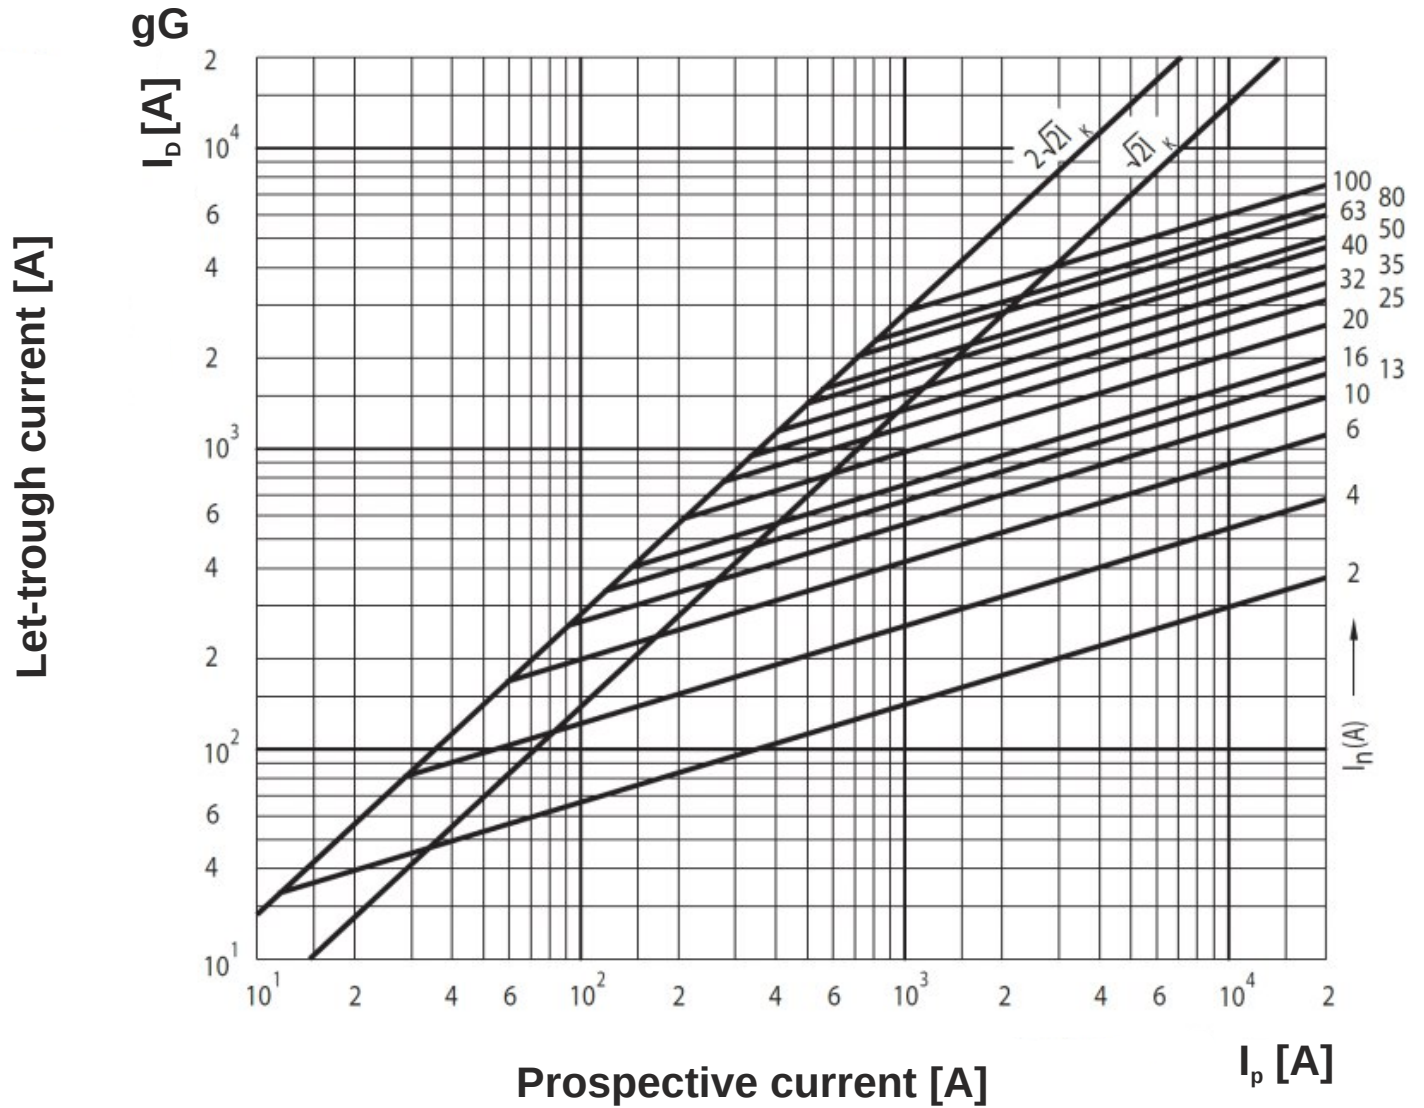

Characteristics

Cut-off current characteristics

